




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Area
OKLAHOMA/3/EG - LOADER
 Machine Id
50.25L [OKLAHOMA^3^EG - LOADER]
 Component
Front Right Final Drive
 Fluid
MOBIL SHC 629 (--- GAL)

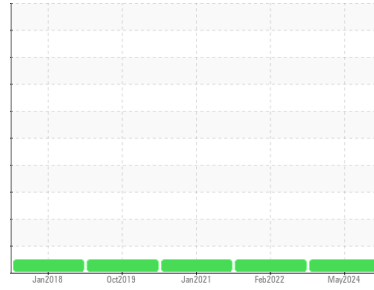

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0935143	WC0662466	WC0528007
Sample Date	Client Info		12 May 2024	08 Feb 2022	07 Jan 2021
Machine Age	hrs	Client Info	22322	19444	17464
Oil Age	hrs	Client Info	1412	1980	325
Oil Changed	Client Info		N/A	Changed	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>800	181	179	36
Chromium	ppm	ASTM D5185m	>10	1	<1	<1
Nickel	ppm	ASTM D5185m	>5	1	1	2
Titanium	ppm	ASTM D5185m	>15	<1	0	<1
Silver	ppm	ASTM D5185m	>2	<1	0	<1
Aluminum	ppm	ASTM D5185m	>75	2	<1	0
Lead	ppm	ASTM D5185m	>10	3	2	1
Copper	ppm	ASTM D5185m	>75	40	7	9
Tin	ppm	ASTM D5185m	>8	2	<1	<1
Antimony	ppm	ASTM D5185m	>50	---	1	0
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		<1	0	<1

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		0	1	14
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		<1	<1	<1
Manganese	ppm	ASTM D5185m		2	2	<1
Magnesium	ppm	ASTM D5185m		1	1	10
Calcium	ppm	ASTM D5185m		170	30	1419
Phosphorus	ppm	ASTM D5185m		624	467	760
Zinc	ppm	ASTM D5185m		77	12	579
Sulfur	ppm	ASTM D5185m		530	422	4331

CONTAMINANTS


	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>400	21	17	17
Sodium	ppm	ASTM D5185m		2	4	0
Potassium	ppm	ASTM D5185m	>20	5	3	<1

VISUAL

	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	LIGHT	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG



OIL ANALYSIS REPORT

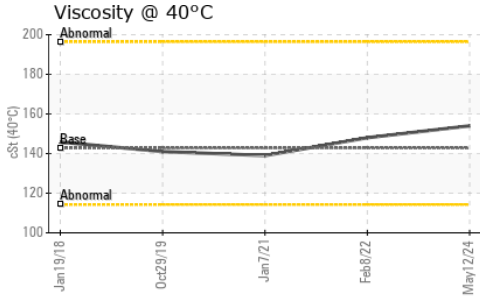




FLUID PROPERTIES	method	limit/base	current	history1	history2
------------------	--------	------------	---------	----------	----------

Visc @ 40°C	cSt	ASTM D445	142.8	154	148	139
-------------	-----	-----------	-------	------------	-----	-----

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image	no image
Bottom				no image	no image	no image

GRAPHS

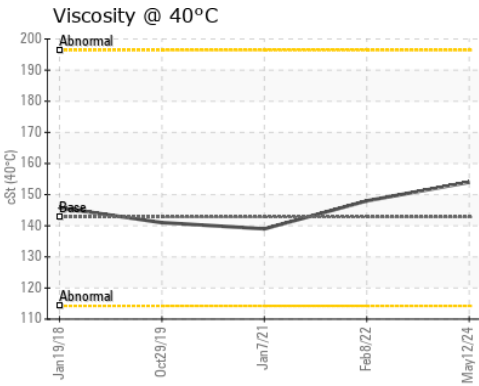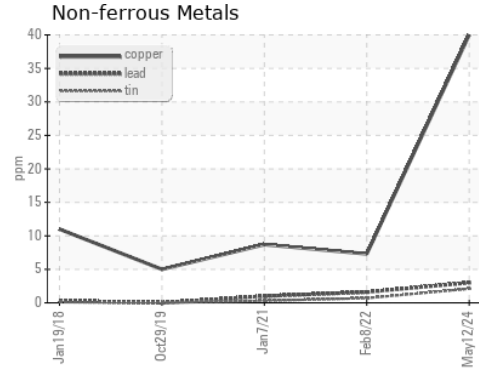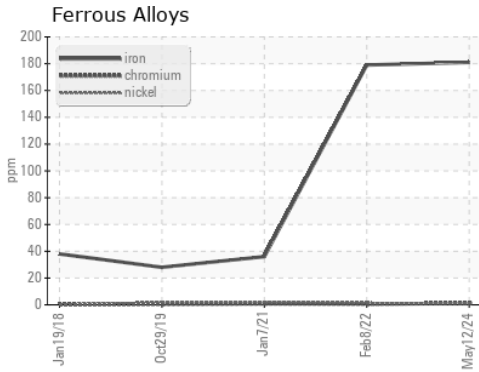

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0935143
Lab Number : **06185327**
Unique Number : 11036653
Test Package : CONST

Received : 20 May 2024
Tested : 22 May 2024
Diagnosed : 22 May 2024 - Don Baldrige

SHERWOOD CONSTRUCTION CO INC
 3219 WEST MAY ST
 WICHITA, KS
 US 67213
 Contact: DOUG KING
 doug.king@sherwood.net
 T: (316)617-3161
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)