


# **OIL ANALYSIS REPORT**



# OKLAHOMA/102 36.23L [OKLAHOMA^102]

Transmission (Manual)

**MOBIL MOBILTRANS AST 30 (--- GAL)** 





#### Recommendation

The fluid change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

An increase in the iron level is noted. All other component wear rates are normal.

#### Contamination

There is no indication of any contamination in the


### **Fluid Condition**


The condition of the fluid is acceptable for the time in service.


` ′						
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0935220	WC0857280	WC0800838
Sample Date		Client Info		08 May 2024	26 Oct 2023	30 Mar 2023
Machine Age	hrs	Client Info		4582	3545	2311
Oil Age	hrs	Client Info		1037	1234	2311
Oil Changed		Client Info		Changed	Changed	Changed
Sample Status				ATTENTION	NORMAL	NORMAL
CONTAMINATION	٧	method	limit/base	current	history1	history2
Water		WC Method	>0.1	NEG	NEG	NEG
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	<b>195</b>	10	15
Chromium	ppm	ASTM D5185m	>5	<1	0	0
Nickel	ppm	ASTM D5185m	>5	0	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>7	<1	0	0
Aluminum	ppm	ASTM D5185m	>25	2	<1	<1
Lead	ppm	ASTM D5185m	>45	<1	<1	<1
Copper	ppm	ASTM D5185m	>225	1	5	9
Tin	ppm	ASTM D5185m	>10	0	0	0
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		13	24	<1
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		4	<1	<1
Manganese	ppm	ASTM D5185m		1	<1	1
Magnesium	ppm	ASTM D5185m		33	27	21
Calcium	ppm	ASTM D5185m		3095	2879	3076
Phosphorus	ppm	ASTM D5185m		1071	951	1052
Zinc	ppm	ASTM D5185m		1247	1180	1320
Sulfur	ppm	ASTM D5185m		9319	5167	7325
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>125	13	7	14
Sodium	ppm	ASTM D5185m		<1	4	4
Potassium	ppm	ASTM D5185m	>20	3	0	1
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal		7.00.00.				
Yellow Metal Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
			NONE NONE	NONE MODER	NONE NONE	NONE NONE
Precipitate	scalar	*Visual				
Precipitate Silt	scalar scalar	*Visual	NONE	MODER	NONE	NONE
Precipitate Silt Debris	scalar scalar scalar	*Visual *Visual *Visual	NONE NONE	MODER NONE	NONE NONE	NONE NONE
Precipitate Silt Debris Sand/Dirt	scalar scalar scalar scalar	*Visual *Visual *Visual *Visual	NONE NONE	MODER NONE NONE	NONE NONE NONE	NONE NONE
Precipitate Silt Debris Sand/Dirt Appearance	scalar scalar scalar scalar scalar	*Visual  *Visual  *Visual  *Visual	NONE NONE NORML	MODER NONE NONE NORML	NONE NONE NONE NORML	NONE NONE NONE NORML
Precipitate Silt Debris Sand/Dirt Appearance Odor	scalar scalar scalar scalar scalar scalar	*Visual *Visual *Visual *Visual *Visual *Visual	NONE NONE NONE NORML	MODER NONE NONE NORML NORML	NONE NONE NORML NORML	NONE NONE NORML NORML





## **OIL ANALYSIS REPORT**






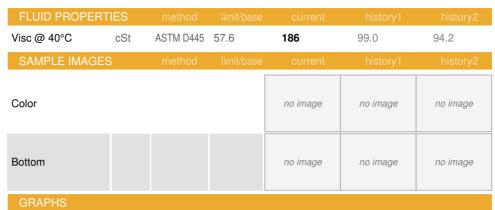











Certificate 12367

Laboratory Sample No.

: WC0935220 Lab Number : 06185373

Unique Number : 11036699 Test Package : CONST

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 20 May 2024

**Tested** : 21 May 2024 Diagnosed : 22 May 2024 - Don Baldridge

SHERWOOD CONSTRUCTION CO INC 3219 WEST MAY ST WICHITA, KS US 67213

Contact: SHAWN SOUTH shawn.south@sherwood.net

To discuss this sample report, contact Customer Service at 1-800-237-1369. \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: x:

F: x: