




# OIL ANALYSIS REPORT

Sample Rating Trend

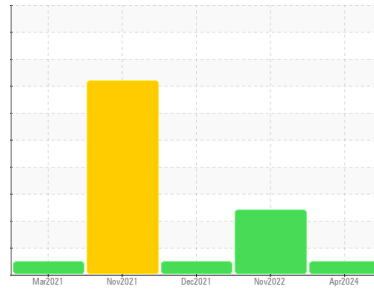

**NORMAL**



Area  
**[21065]**  
 Machine Id  
**80-235**  
 Component  
**Diesel Engine**  
 Fluid  
**CONOCO PHILLIPS GUARDOL ECT 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0923378</b>	WC0709378	WC0601533
Sample Date	Client Info		<b>22 Apr 2024</b>	03 Nov 2022	15 Dec 2021
Machine Age	hrs	Client Info	<b>3094</b>	2281	1962
Oil Age	hrs	Client Info	<b>250</b>	319	57
Oil Changed	Client Info		<b>Changed</b>	Changed	Not Changed
Sample Status			<b>NORMAL</b>	ABNORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>24</b>	35	17
Chromium	ppm	ASTM D5185m >20	<b>1</b>	3	3
Nickel	ppm	ASTM D5185m >4	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m >3	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>8</b>	16	6
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	<1	0
Copper	ppm	ASTM D5185m >330	<b>2</b>	3	<1
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	<1
Antimony	ppm	ASTM D5185m	<b>---</b>	---	0
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 85	<b>104</b>	89	113
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>5</b>	5	3
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 350	<b>468</b>	686	734
Calcium	ppm	ASTM D5185m 1800	<b>1506</b>	1366	1355
Phosphorus	ppm	ASTM D5185m 1000	<b>1041</b>	1033	1098
Zinc	ppm	ASTM D5185m 1100	<b>1120</b>	1226	1261
Sulfur	ppm	ASTM D5185m 3500	<b>3767</b>	4316	3449

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>6</b>	28	20
Sodium	ppm	ASTM D5185m	<b>4</b>	4	4
Potassium	ppm	ASTM D5185m >20	<b>5</b>	6	4

## INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.6</b>	0.1	0.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>10.4</b>	8.7	6.5
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>24.0</b>	20.7	19.1

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>18.9</b>	13.7	12.3
Base Number (BN)	mg KOH/g	ASTM D2896 9.5	<b>5.7</b>	9.3	9.7







# OIL ANALYSIS REPORT

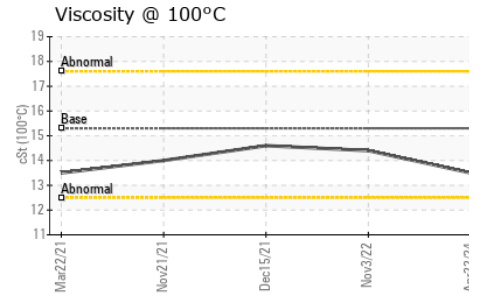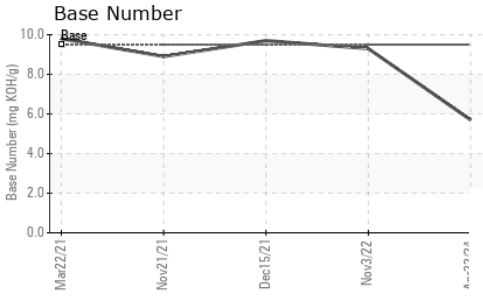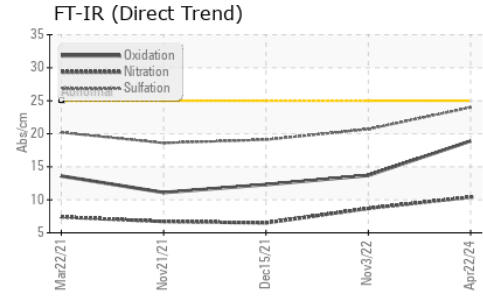

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.3	13.5	14.4

## GRAPHS

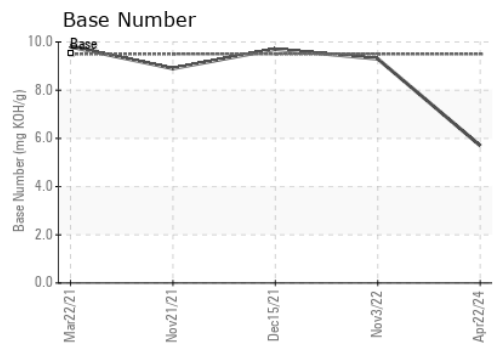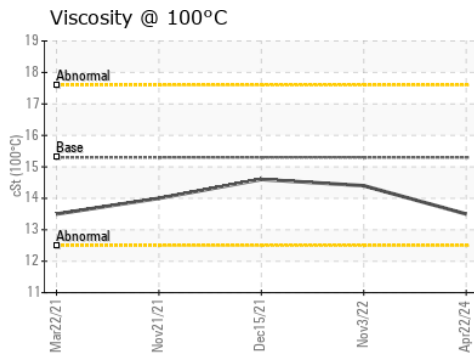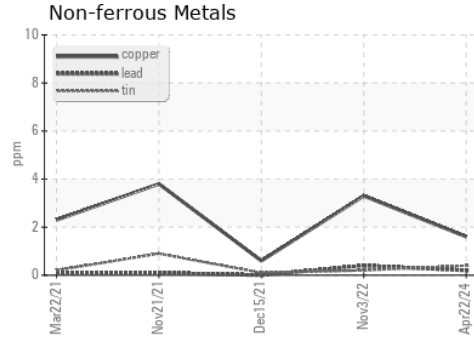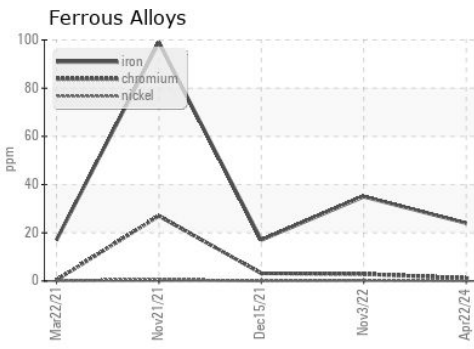

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0923378      **Received** : 20 May 2024  
**Lab Number** : 06185426      **Tested** : 22 May 2024  
**Unique Number** : 11036752      **Diagnosed** : 22 May 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: TBN )

**MANHATTAN ROAD AND BRIDGE**  
 5601 S 122ND E AVE  
 TULSA, OK 74146  
 Contact: BEN CALDWELL  
 kevin.marson@wearcheck.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)