




# OIL ANALYSIS REPORT

Area  
**OKLAHOMA/102/EG - DOZER**  
 Machine Id  
**36.22L [OKLAHOMA^102^EG - DOZER]**  
 Component  
**Diesel Engine**  
 Fluid  
**MOBIL DELVAC 1300 SUPER15W40 (7 GAL)**

Sample Rating Trend

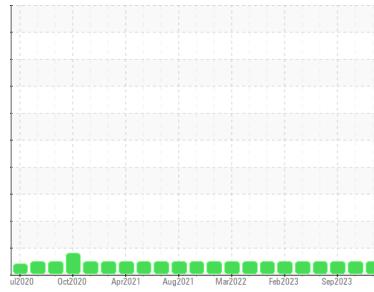

**NORMAL**



## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0935196</b>	WC0886953	WC0781128
Sample Date	Client Info			<b>08 May 2024</b>	29 Jan 2024	05 Sep 2023
Machine Age	hrs	Client Info		<b>7440</b>	7238	7156
Oil Age	hrs	Client Info		<b>202</b>	250	5860
Oil Changed	Client Info			<b>Changed</b>	Changed	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>6</b>	6	13
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m	>2	<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m	>2	<b>&lt;1</b>	1	0
Aluminum	ppm	ASTM D5185m	>25	<b>4</b>	5	4
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	<1	1
Copper	ppm	ASTM D5185m	>330	<b>&lt;1</b>	<1	2
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	<1	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	<b>52</b>	60	26
Barium	ppm	ASTM D5185m	0	<b>0</b>	<1	0
Molybdenum	ppm	ASTM D5185m	0	<b>41</b>	48	41
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	1
Magnesium	ppm	ASTM D5185m	0	<b>495</b>	612	579
Calcium	ppm	ASTM D5185m		<b>1686</b>	1897	1803
Phosphorus	ppm	ASTM D5185m		<b>862</b>	965	940
Zinc	ppm	ASTM D5185m		<b>931</b>	1144	1199
Sulfur	ppm	ASTM D5185m		<b>2948</b>	3543	3669




CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>5</b>	6	6
Sodium	ppm	ASTM D5185m		<b>2</b>	2	3
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	2	2

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.3</b>	0.4	0.9
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.9</b>	6.5	8.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>20.1</b>	21.4	22.4

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>16.6</b>	18.8	20.0
Base Number (BN)	mg KOH/g	ASTM D2896	9.4	<b>7.5</b>	10.2	9.6







# OIL ANALYSIS REPORT

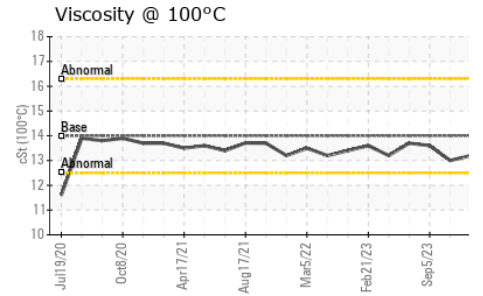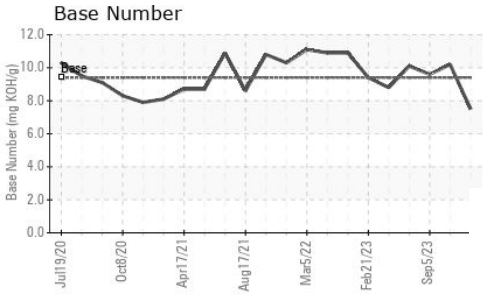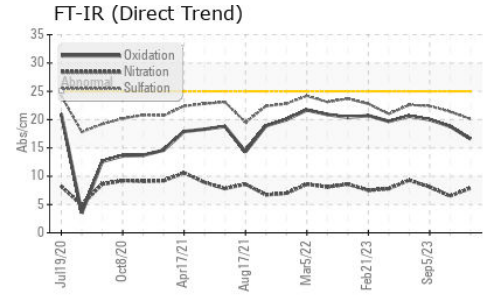

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445 14	13.2	13.0	13.6

### GRAPHS

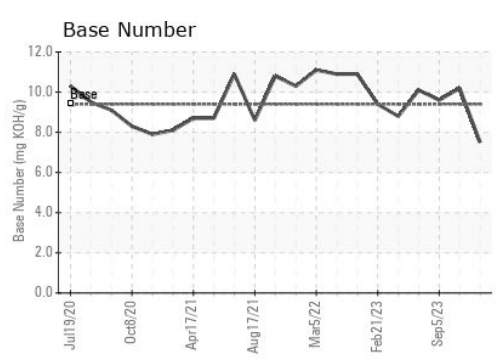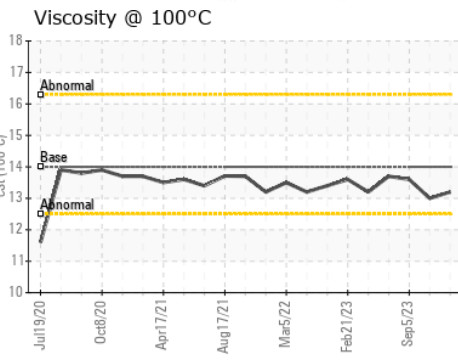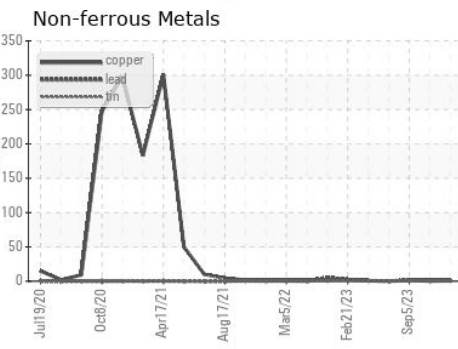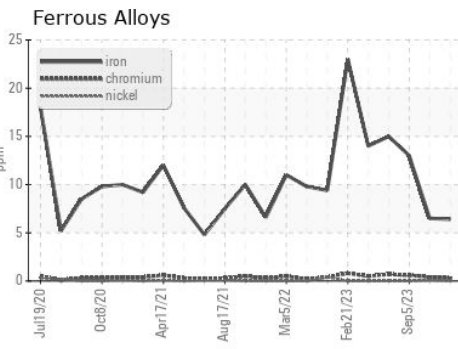

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0935196      **Received** : 20 May 2024  
**Lab Number** : 06185444      **Tested** : 22 May 2024  
**Unique Number** : 11036770      **Diagnosed** : 22 May 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: TBN )

**SHERWOOD CONSTRUCTION CO INC**  
 3219 WEST MAY ST  
 WICHITA, KS 67213  
 Contact: DOUG KING  
 doug.king@sherwood.net  
 T: (316)617-3161  
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)