




# OIL ANALYSIS REPORT



Area  
**OKLAHOMA/102/EG - OTHER SERVICE**  
 Machine Id  
**53.126L [OKLAHOMA^102^EG - OTHER SERVICE]**  
 Component  
**Diesel Engine**  
 Fluid  
**MOBIL DELVAC 1300 SUPER15W40 (--- GAL)**

Sample Rating Trend

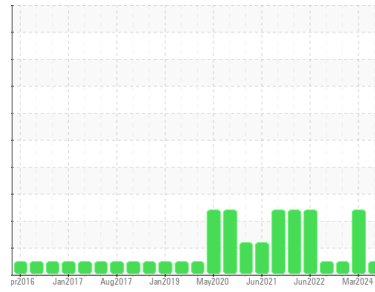

**NORMAL**



## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0857492</b>	WC0857477	WC0746246
Sample Date	Client Info			<b>13 May 2024</b>	07 Mar 2024	21 Oct 2022
Machine Age	hrs	Client Info		<b>5521</b>	5353	4865
Oil Age	hrs	Client Info		<b>5353</b>	250	185
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	ABNORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>10</b>	57	5
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	2	<1
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	>2	<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>3</b>	14	1
Lead	ppm	ASTM D5185m	>40	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>330	<b>1</b>	5	<1
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	<b>59</b>	55	52
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	0	<b>41</b>	50	39
Manganese	ppm	ASTM D5185m		<b>0</b>	0	<1
Magnesium	ppm	ASTM D5185m	0	<b>497</b>	593	469
Calcium	ppm	ASTM D5185m		<b>1701</b>	1967	1623
Phosphorus	ppm	ASTM D5185m		<b>841</b>	896	711
Zinc	ppm	ASTM D5185m		<b>924</b>	1048	887
Sulfur	ppm	ASTM D5185m		<b>2806</b>	2848	2649




CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>8</b>	39	4
Sodium	ppm	ASTM D5185m		<b>3</b>	3	2
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	4	1

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0</b>	0.5	0.2
Nitration	Abs/cm	*ASTM D7624	>20	<b>4.8</b>	9.4	6.5
Sulfation	Abs.1mm	*ASTM D7415	>30	<b>16.8</b>	23.6	23.5

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs.1mm	*ASTM D7414	>25	<b>12.3</b>	23.5	21.6
Base Number (BN)	mg KOH/g	ASTM D2896	9.4	<b>9.2</b>	9.8	11.4







# OIL ANALYSIS REPORT

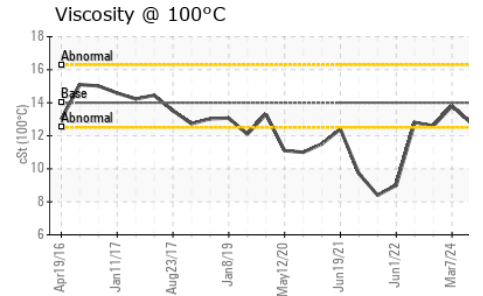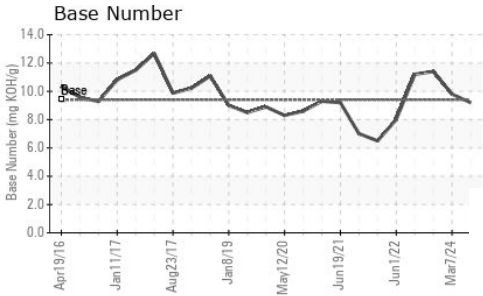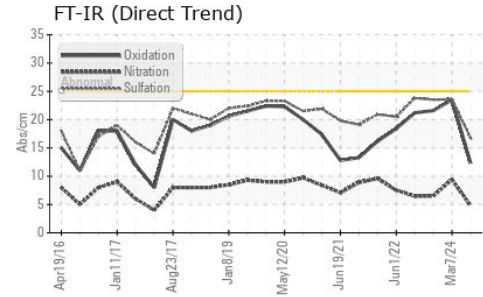

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14	12.8	13.8	12.6

## GRAPHS

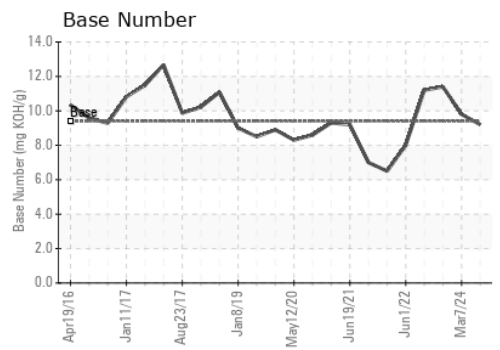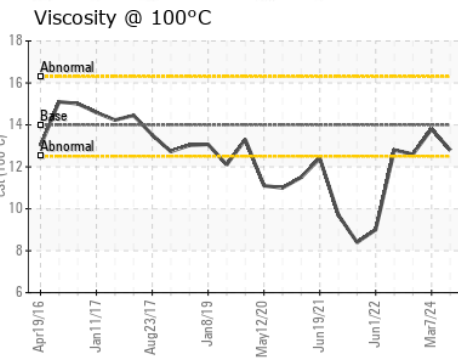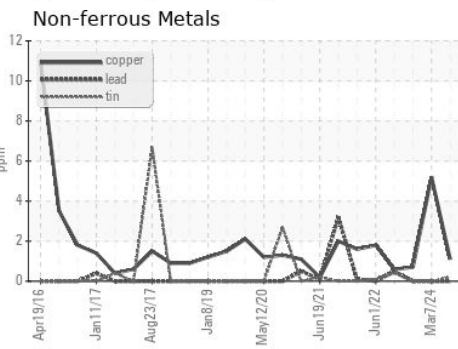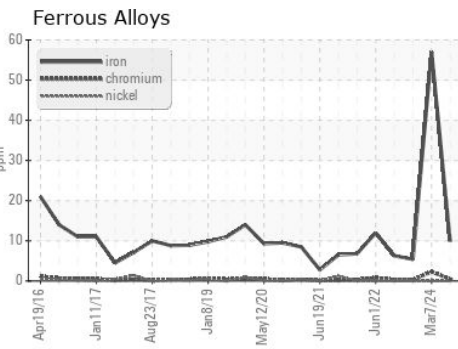

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0857492      **Received** : 20 May 2024  
**Lab Number** : 06185459      **Tested** : 22 May 2024  
**Unique Number** : 11036785      **Diagnosed** : 22 May 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: TBN )

**SHERWOOD CONSTRUCTION CO INC**  
 3219 WEST MAY ST  
 WICHITA, KS  
 US 67213  
 Contact: DOUG KING  
 doug.king@sherwood.net  
 T: (316)617-3161  
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)