



# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**



Machine Id  
**VOLVO EC160E 310212**  
 Component  
**Diesel Engine**  
 Fluid  
**{not provided} (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>ML0000250</b>	---	---
Sample Date	Client Info		<b>13 May 2024</b>	---	---
Machine Age	hrs	Client Info	<b>6230</b>	---	---
Oil Age	hrs	Client Info	<b>500</b>	---	---
Oil Changed	Client Info		<b>Changed</b>	---	---
Sample Status			<b>NORMAL</b>	---	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>6.0	<b>&lt;1.0</b>	---	---
Water	WC Method	>0.1	<b>NEG</b>	---	---
Glycol	WC Method		<b>NEG</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>48</b>	---	---
Chromium	ppm	ASTM D5185m >10	<b>2</b>	---	---
Nickel	ppm	ASTM D5185m >10	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m >2	<b>&lt;1</b>	---	---
Aluminum	ppm	ASTM D5185m >10	<b>8</b>	---	---
Lead	ppm	ASTM D5185m >20	<b>&lt;1</b>	---	---
Copper	ppm	ASTM D5185m >15	<b>3</b>	---	---
Tin	ppm	ASTM D5185m >10	<b>1</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	---	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>10</b>	---	---
Barium	ppm	ASTM D5185m	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m	<b>86</b>	---	---
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185m	<b>919</b>	---	---
Calcium	ppm	ASTM D5185m	<b>1252</b>	---	---
Phosphorus	ppm	ASTM D5185m	<b>1199</b>	---	---
Zinc	ppm	ASTM D5185m	<b>1283</b>	---	---
Sulfur	ppm	ASTM D5185m	<b>3639</b>	---	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>8</b>	---	---
Sodium	ppm	ASTM D5185m	<b>2</b>	---	---
Potassium	ppm	ASTM D5185m >20	<b>3</b>	---	---




## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.3</b>	---	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.1</b>	---	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.2</b>	---	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>17.0</b>	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	<b>8.7</b>	---	---





# OIL ANALYSIS REPORT

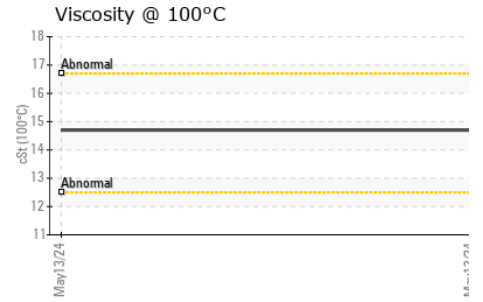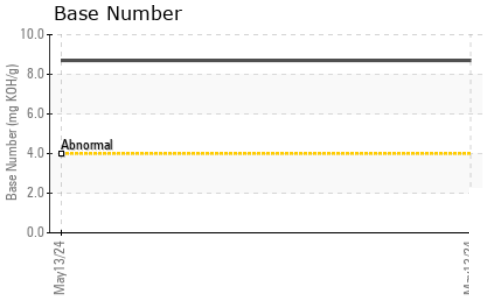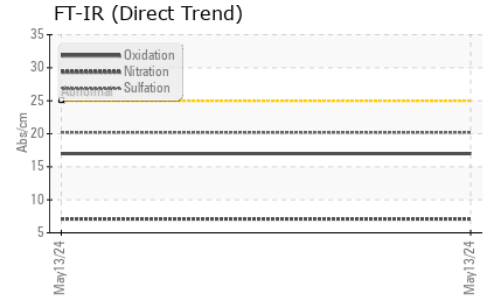

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.7	---	---

### GRAPHS

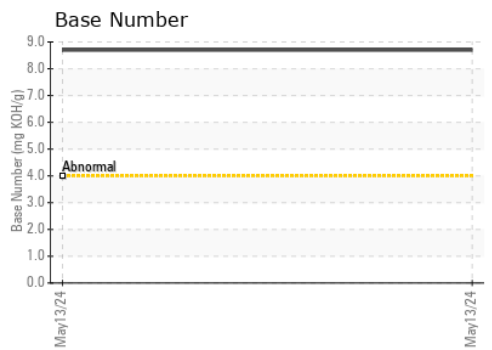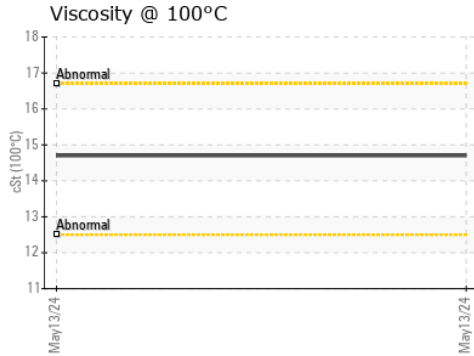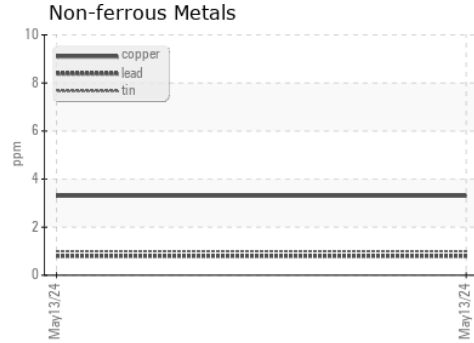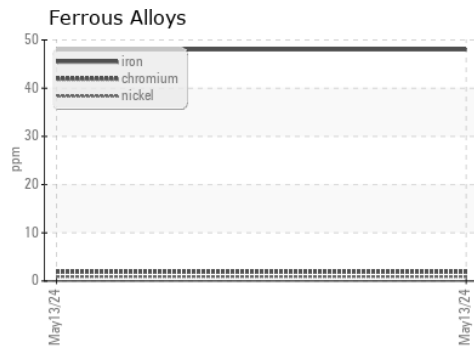

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : ML0000250      **Received** : 20 May 2024  
**Lab Number** : 06185507      **Tested** : 22 May 2024  
**Unique Number** : 11036833      **Diagnosed** : 22 May 2024 - Sean Felton  
**Test Package** : CONST ( Additional Tests: TBN )

**McCLUNG-LOGAN EQUIPMENT CO - BRIDGEVILLE**  
 17941 SUSSEX HIGHWAY  
 BRIDGEVILLE, DE  
 US 19933  
 Contact: MATT CLARK  
 MCLARK@mcclung-logan.com  
 T: (302)337-3400  
 F: (302)337-9083

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)