




OIL ANALYSIS REPORT

Sample Rating Trend

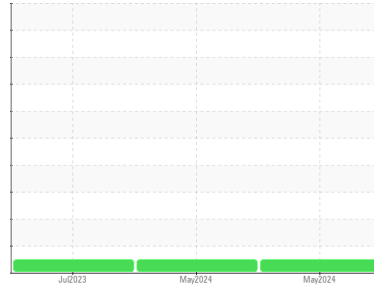

NORMAL



Machine Id

3113

Component

Diesel Engine

Fluid

DIESEL ENGINE OIL SAE 10W30 (--- QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0906887	WC0906885	WC0816657
Sample Date	Client Info			15 May 2024	14 May 2024	16 Jul 2023
Machine Age	mls	Client Info		156374	156373	135339
Oil Age	mls	Client Info		0	21034	123912
Oil Changed	Client Info			Changed	Not Changd	Changed
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	23	7	40
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>4	5	<1	5
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m	>3	<1	<1	0
Aluminum	ppm	ASTM D5185m	>20	8	3	20
Lead	ppm	ASTM D5185m	>40	<1	<1	0
Copper	ppm	ASTM D5185m	>330	8	1	11
Tin	ppm	ASTM D5185m	>15	<1	<1	<1
Vanadium	ppm	ASTM D5185m		<1	<1	<1
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	250	33	83	34
Barium	ppm	ASTM D5185m	10	0	0	0
Molybdenum	ppm	ASTM D5185m	100	2	<1	5
Manganese	ppm	ASTM D5185m		<1	0	1
Magnesium	ppm	ASTM D5185m	450	776	677	799
Calcium	ppm	ASTM D5185m	3000	1402	1335	1583
Phosphorus	ppm	ASTM D5185m	1150	859	765	790
Zinc	ppm	ASTM D5185m	1350	895	795	954
Sulfur	ppm	ASTM D5185m	4250	3487	3228	3640




CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	9	7	7
Sodium	ppm	ASTM D5185m		2	3	4
Potassium	ppm	ASTM D5185m	>20	16	8	41

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.2	0.2	0.6
Nitration	Abs/cm	*ASTM D7624	>20	7.3	7.5	11.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.8	18.8	25.6

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	13.4	13.1	20.9
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	8.3	8.7	5.7







OIL ANALYSIS REPORT

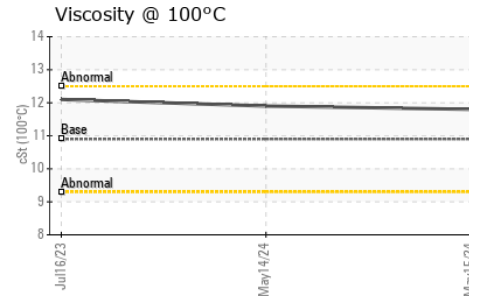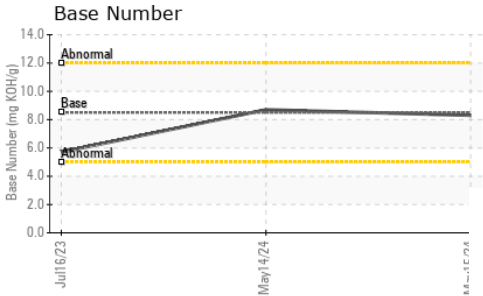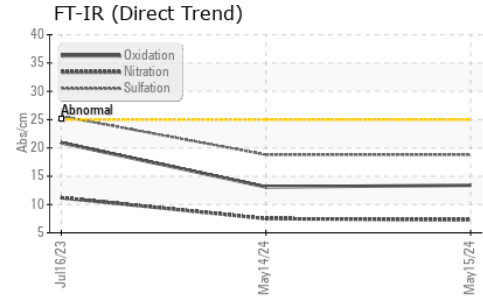

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	10.9	11.8	11.9

GRAPHS

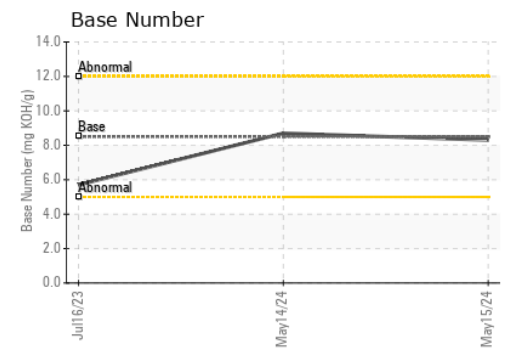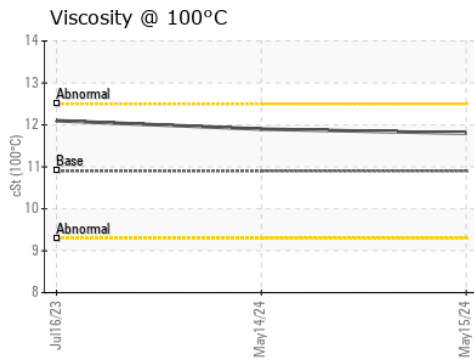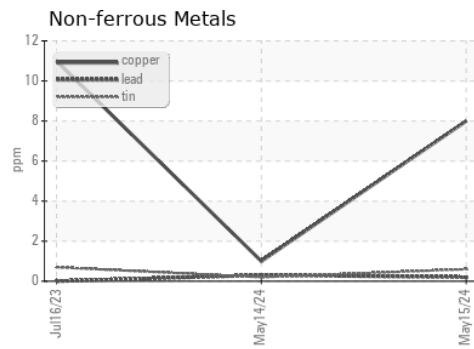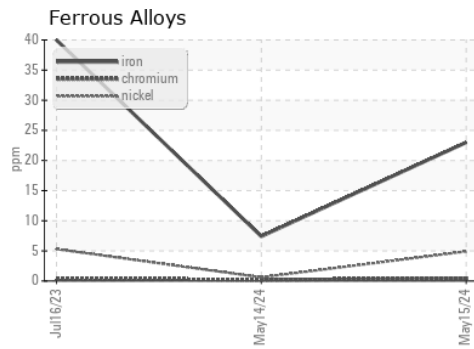

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0906887 **Received** : 20 May 2024
Lab Number : 06185522 **Tested** : 22 May 2024
Unique Number : 11036848 **Diagnosed** : 22 May 2024 - Wes Davis
Test Package : FLEET

LTI/MILKY WAY - SUNNYSIDE
 333 MIDVALE RD
 SUNNYSIDE, WA
 US 98944
 Contact: Barbara Kluever
 bkluever@lynden.com
 T: (509)839-5844
 F: (509)839-6556

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)