

## FUEL REPORT

### Area **Rutherford Regional Hospital** [Rutherford Regional Hospital] GEN DAY 2

**Diesel Fuel** 

Fluid No.2 DIESEL FUEL (ULTRALOW SULPHUR) (100 GAL)

#### DIAGNOSIS

#### Recommendation

All laboratory tests indicate that this sample meets specifications for No.2 low-sulfur diesel fuel.

#### Corrosion


All metal levels are normal indicating no corrosion in the system.

#### Contaminants

The water content is negligible. There is no bacteria or fungus (yeast and/or mold) indicated in the sample. There is no indication of any contamination in the fuel. The amount and size of particulates present in the system are acceptable.

#### **Fuel Condition**

Sulfur value derived by ASTM D5453 method for ULSD validation.



Sample Rating Trend




NORMAL

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC06185737		
Sample Date		Client Info		20 May 2024		
Machine Age	hrs	Client Info		0		
Sample Status				NORMAL		
PHYSICAL PROP	ERTIES	method	limit/base	current	history1	history2
ASTM Color	scalar	*ASTM D1500		L4.5		
Visc @ 40°C	cSt	ASTM D445	3.0	2.46		
Pensky-Martens Flash Point	°C	*PMCC Calculated	52	60.9		
SULFUR CONTE	NT	method	limit/base	current	history1	history2
Sulfur	ppm	ASTM D5185m	10	134		
Sulfur (UVF)	ppm	ASTM D5453		119		
DISTILLATION		method	limit/base	current	history1	history2
Initial Boiling Point	°C	ASTM D86	165	171		
5% Distillation Point	°C	ASTM D86		194		
10% Distill Point	°C	ASTM D86	201	203		
15% Distillation Point	°C	ASTM D86		211		
20% Distill Point	°C	ASTM D86	216	219		
30% Distill Point	°C	ASTM D86	230	233		
40% Distill Point	°C	ASTM D86	243	247		
50% Distill Point	°C	ASTM D86	255	260		
60% Distill Point	°C	ASTM D86	267	274		
70% Distill Point	°C	ASTM D86	280	288		
80% Distill Point	°C	ASTM D86	295	304		
85% Distillation Point	°C	ASTM D86		315		
90% Distill Point	°C	ASTM D86	310	325		
95% Distillation Point	°C	ASTM D86		344		
Final Boiling Point	°C	ASTM D86	341	359		
IGNITION QUALI	ΓY	method	limit/base	current	history1	history2
API Gravity		ASTM D7777	37.7	36		
Cetane Index		ASTM D4737	<40.0	48		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	<1.0	0		
Sodium	ppm	ASTM D5185m	<0.1	0		
Potassium	ppm	ASTM D5185m	<0.1	0		
Water	%	ASTM D6304	<0.05	0.001		
ppm Water	ppm	ASTM D6304	<500	14		
% Gasoline	%	*In-House	<0.50	0.0		
% Biodiesel	%	*In-House	<20.0	0.0		



# CIICI DEDADT

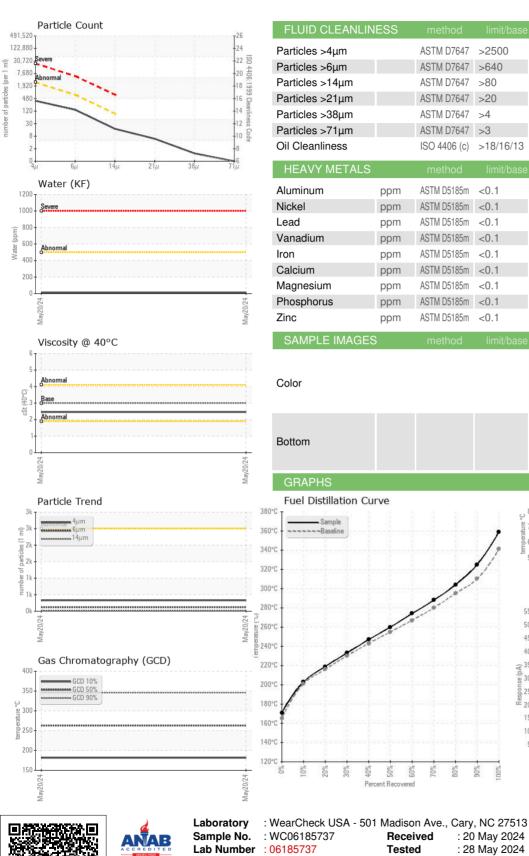

FUEL R	EPC	DRT				
LUID CLEANLI		mothed	limit/boos	ourroat	history	history
	NESS	method ASTM D7647	limit/base	current 330	history1	history2
urticles >4μm urticles >6μm		ASTM D7647 ASTM D7647	>2500	122		
irticles >0µm		ASTM D7647 ASTM D7647	>040 >80	122		
urticles >21µm		ASTM D7647	>20	5		
irticles >38µm		ASTM D7647	>4	1		
irticles >71µm		ASTM D7647	>3	0		
l Cleanliness		ISO 4406 (c)	>18/16/13	16/14/11		
HEAVY METALS		method	limit/base	current	history1	history2
uminum	ppm	ASTM D5185m	<0.1	0		
ckel	ppm	ASTM D5185m	<0.1	0		
ad	ppm	ASTM D5185m	<0.1	0		
inadium	ppm	ASTM D5185m	<0.1	0		
'n	ppm	ASTM D5185m	<0.1	0		
alcium	ppm	ASTM D5185m	<0.1	0		
agnesium	ppm	ASTM D5185m	<0.1	0		
osphorus	ppm	ASTM D5185m	<0.1	0		
רכ	ppm	ASTM D5185m	<0.1	0		
SAMPLE IMAGE	S	method	limit/base	current	history1	history2
olor					no image	no image
ttom					no image	no image
GRAPHS						
uel Distillation Cu	urve		0.0	Pensky-Marte	ns Flash Point (	°C)
Sample			္ <sup>80</sup> မိ 70			
Baseline			00 temperature			
			50	L-T		
		/	1.	May20/24		Mav20/24
		1.				May
		1.	550	GCD Spectrur		
	1	****	500	10%	(90°s)	
1			450			
1000			400			
1			(Pd) 350			
1			(¥350 as 300 dd 250 820			
ſ			200	•		
			150			
			100			
			50	T IN W	N.	

%00



: WC06185737 Received : 20 May 2024 Lab Number : 06185737 Tested : 28 May 2024 SUMMERVILLE, SC Unique Number : 11037063 Diagnosed : 28 May 2024 - Doug Bogart Test Package : DF-2 (Additional Tests: Fuel, Screen) Certificate 12367 To discuss this sample report, contact Customer Service at 1-800-237-1369. \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Percent Recovered

10% 20% 30% 40% 20% 80% %0L 80% 90%

Report Id: PETSUM [WUSCAR] 06185737 (Generated: 05/28/2024 20:09:08) Rev: 1

Contact/Location: AJAY EL - PETSUM

PETROLEUM RECOVERY SERVICES

13 1, 9 00

Time (min)

F:

US 29483

210 POWELL DR

Contact: AJAY EL

Ajay@prsfuel.com

T: (843)225-1777