




# OIL ANALYSIS REPORT

Sample Rating Trend

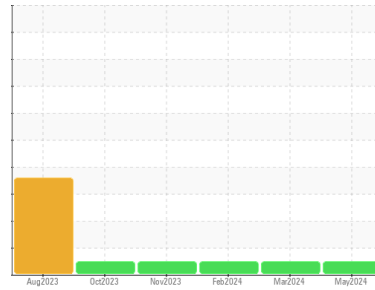

**NORMAL**



Machine Id

**DBTK18**

Component

**Diesel Engine**

Fluid

**DIESEL ENGINE OIL SAE 40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

| SAMPLE INFORMATION |             | method      | limit/base | current            | history1    | history2    |
|--------------------|-------------|-------------|------------|--------------------|-------------|-------------|
| Sample Number      | Client Info |             |            | <b>SBP0006878</b>  | SBP0006816  | SBP0005342  |
| Sample Date        | Client Info |             |            | <b>10 May 2024</b> | 28 Mar 2024 | 21 Feb 2024 |
| Machine Age        | mls         | Client Info |            | <b>12000</b>       | 0           | 12000       |
| Oil Age            | mls         | Client Info |            | <b>12000</b>       | 0           | 12000       |
| Oil Changed        | Client Info |             |            | <b>Not Changed</b> | N/A         | Not Changed |
| Sample Status      |             |             |            | <b>NORMAL</b>      | NORMAL      | NORMAL      |

| CONTAMINATION |           | method | limit/base | current        | history1 | history2 |
|---------------|-----------|--------|------------|----------------|----------|----------|
| Fuel          | WC Method | >5     |            | <b>&lt;1.0</b> | <1.0     | <1.0     |
| Water         | WC Method | >0.2   |            | <b>NEG</b>     | NEG      | NEG      |
| Glycol        | WC Method |        |            | <b>NEG</b>     | NEG      | NEG      |

| WEAR METALS |     | method      | limit/base | current      | history1 | history2 |
|-------------|-----|-------------|------------|--------------|----------|----------|
| Iron        | ppm | ASTM D5185m | >100       | <b>17</b>    | 10       | 12       |
| Chromium    | ppm | ASTM D5185m | >20        | <b>&lt;1</b> | <1       | 1        |
| Nickel      | ppm | ASTM D5185m | >4         | <b>0</b>     | <1       | <1       |
| Titanium    | ppm | ASTM D5185m |            | <b>0</b>     | 0        | <1       |
| Silver      | ppm | ASTM D5185m | >3         | <b>&lt;1</b> | 0        | <1       |
| Aluminum    | ppm | ASTM D5185m | >20        | <b>6</b>     | 4        | 7        |
| Lead        | ppm | ASTM D5185m | >40        | <b>&lt;1</b> | 0        | <1       |
| Copper      | ppm | ASTM D5185m | >330       | <b>&lt;1</b> | <1       | 2        |
| Tin         | ppm | ASTM D5185m | >15        | <b>0</b>     | 0        | 1        |
| Vanadium    | ppm | ASTM D5185m |            | <b>0</b>     | 0        | <1       |
| Cadmium     | ppm | ASTM D5185m |            | <b>0</b>     | 0        | <1       |

| ADDITIVES  |     | method      | limit/base | current      | history1 | history2 |
|------------|-----|-------------|------------|--------------|----------|----------|
| Boron      | ppm | ASTM D5185m | 250        | <b>0</b>     | <1       | 2        |
| Barium     | ppm | ASTM D5185m | 10         | <b>0</b>     | 0        | 2        |
| Molybdenum | ppm | ASTM D5185m | 100        | <b>63</b>    | 55       | 53       |
| Manganese  | ppm | ASTM D5185m |            | <b>&lt;1</b> | <1       | <1       |
| Magnesium  | ppm | ASTM D5185m | 450        | <b>1117</b>  | 977      | 882      |
| Calcium    | ppm | ASTM D5185m | 3000       | <b>1260</b>  | 1080     | 898      |
| Phosphorus | ppm | ASTM D5185m | 1150       | <b>1182</b>  | 1082     | 890      |
| Zinc       | ppm | ASTM D5185m | 1350       | <b>1481</b>  | 1224     | 1104     |
| Sulfur     | ppm | ASTM D5185m | 4250       | <b>4052</b>  | 3418     | 2749     |

| CONTAMINANTS |     | method      | limit/base | current   | history1 | history2 |
|--------------|-----|-------------|------------|-----------|----------|----------|
| Silicon      | ppm | ASTM D5185m | >25        | <b>5</b>  | 4        | 5        |
| Sodium       | ppm | ASTM D5185m | >216       | <b>1</b>  | 2        | 6        |
| Potassium    | ppm | ASTM D5185m | >20        | <b>16</b> | 8        | 16       |


| INFRA-RED |          | method      | limit/base | current     | history1 | history2 |
|-----------|----------|-------------|------------|-------------|----------|----------|
| Soot %    | %        | *ASTM D7844 | >3         | <b>0.3</b>  | 0.2      | 0        |
| Nitration | Abs/cm   | *ASTM D7624 | >20        | <b>7.2</b>  | 6.6      | 7.0      |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30        | <b>19.2</b> | 18.5     | 18.5     |

| FLUID DEGRADATION |          | method      | limit/base | current     | history1 | history2 |
|-------------------|----------|-------------|------------|-------------|----------|----------|
| Oxidation         | Abs/.1mm | *ASTM D7414 | >25        | <b>14.9</b> | 14.6     | 14.4     |
| Base Number (BN)  | mg KOH/g | ASTM D2896  | 8.5        | <b>7.9</b>  | 8.2      | 8.2      |




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

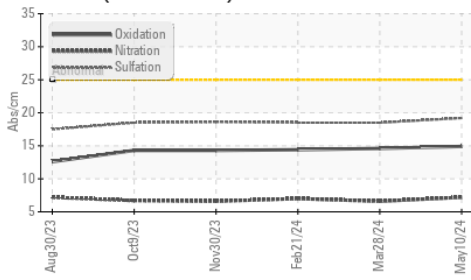

Base Number

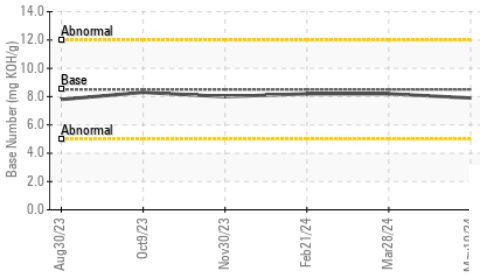

Viscosity @ 100°C

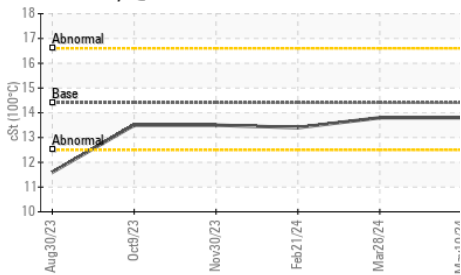


| VISUAL           | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual    | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual    | NONE    | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual    | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual    | >0.2    | NEG      | NEG      |
| Free Water       | scalar | *Visual    |         | NEG      | NEG      |


| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 100°C     | cSt    | ASTM D445  | 14.4    | 13.8     | 13.4     |

## GRAPHS


Ferrous Alloys

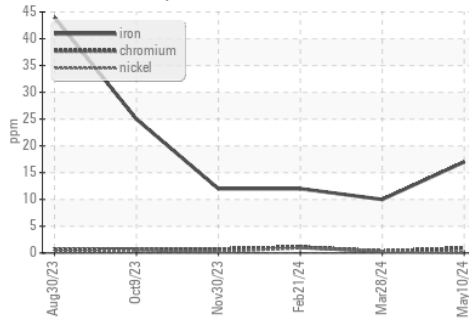


Non-ferrous Metals

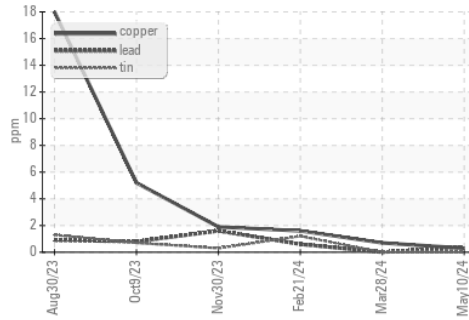

Viscosity @ 100°C

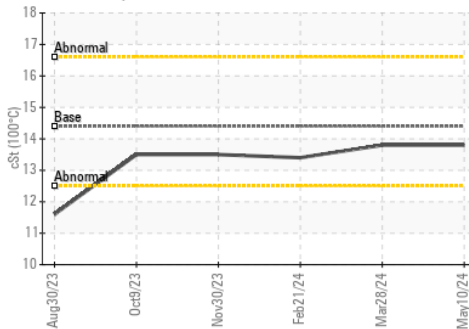

Base Number

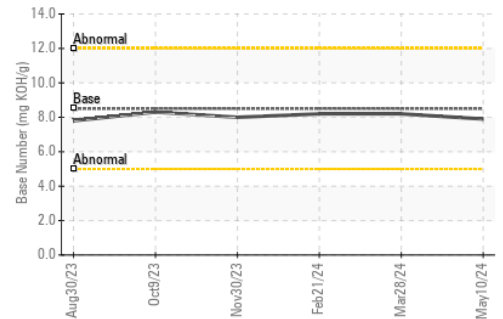

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : SBP0006878      **Received** : 28 May 2024  
**Lab Number** : 06193300      **Tested** : 30 May 2024  
**Unique Number** : 11050052      **Diagnosed** : 30 May 2024 - Wes Davis  
**Test Package** : FLEET

**Pillen Family Farms - 722828**  
 26741 NE-91  
 Humphrey, NE  
 US 61357  
 Contact: Troy Runge  
 troyfr@pillenfamilysfarms.com  
 T: (308)390-6733  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)