

OIL ANALYSIS REPORT

Sample Rating Trend



DEGRADATION



Machine Id
PLATA MEXICALI
 Component
Heat Transfer Fluid
 Fluid
 {not provided} (--- LTR)

DIAGNOSIS

- Recommendation**
 The fluid is suitable for further service. Resample at the next service interval to monitor. All tests and evaluation performed at WearCheck Canada.
- Contamination**
 Pentane Insolubles levels are abnormally high.
- Fluid Condition**
 Acid Number (AN) is abnormally high. Visc @ 40°C is abnormally low.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		TO10003416	---	---
Sample Date	Client Info		27 May 2024	---	---
Machine Age	hrs	Client Info	0	---	---
Oil Age	hrs	Client Info	0	---	---
Oil Changed	Client Info		N/A	---	---
Sample Status			ABNORMAL	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >200	55	---	---
Chromium	ppm	ASTM D5185m >21	0	---	---
Nickel	ppm	ASTM D5185m >21	0	---	---
Titanium	ppm	ASTM D5185m >21	0	---	---
Silver	ppm	ASTM D5185m >21	0	---	---
Aluminum	ppm	ASTM D5185m >21	<1	---	---
Lead	ppm	ASTM D5185m >21	0	---	---
Copper	ppm	ASTM D5185m >21	<1	---	---
Tin	ppm	ASTM D5185m >21	0	---	---
Antimony	ppm	ASTM D5185m >21	0	---	---
Vanadium	ppm	ASTM D5185m	0	---	---
Beryllium	ppm	ASTM D5185m	0	---	---
Cadmium	ppm	ASTM D5185m	0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<1	---	---
Barium	ppm	ASTM D5185m	1	---	---
Molybdenum	ppm	ASTM D5185m	0	---	---
Manganese	ppm	ASTM D5185m	<1	---	---
Magnesium	ppm	ASTM D5185m	<1	---	---
Calcium	ppm	ASTM D5185m	2	---	---
Phosphorus	ppm	ASTM D5185m	3	---	---
Zinc	ppm	ASTM D5185m	6	---	---
Sulfur	ppm	ASTM D5185m	6726	---	---
Lithium	ppm	ASTM D5185m	<1	---	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	2	---	---
Sodium	ppm	ASTM D5185m >21	1	---	---
Potassium	ppm	ASTM D5185m >20	<1	---	---
Water	%	ASTM D6304 >0.0601	0.005	---	---
ppm Water	ppm	ASTM D6304 >601	53	---	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	▲ 0.88	---	---






FLUID PROPERTIES

	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	▲ 52.5	---	---
COC Flash Point	°C	ASTM D92	230	---	---

SEDIMENT

	method	limit/base	current	history1	history2
Pentane Insolubles	%	*ASTM D893	▲ 0.684	---	---



OIL ANALYSIS REPORT

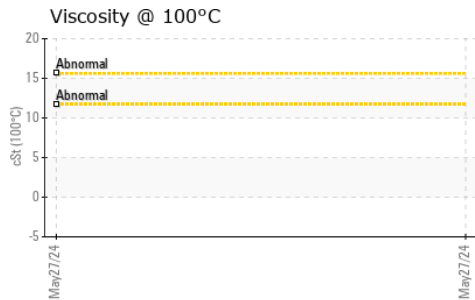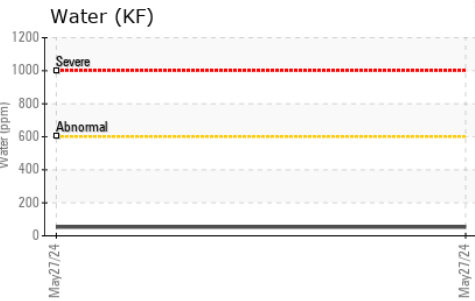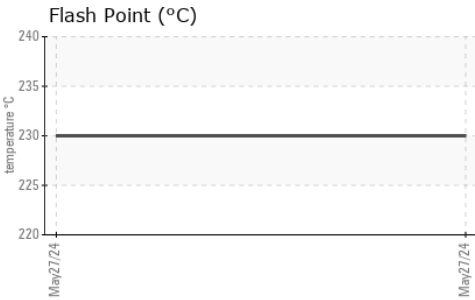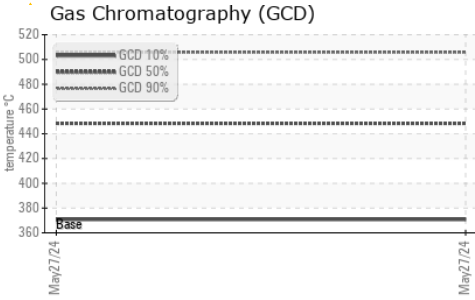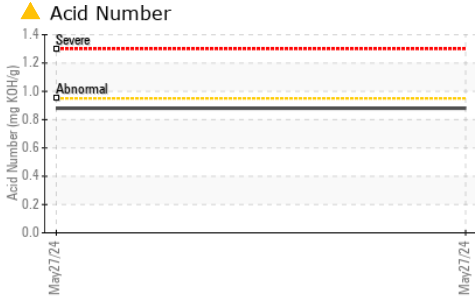

SIMULATED DISTILLATION (GCD)	method	limit/base	current	history1	history2
(GCD) % < 335°C	°C	*ASTM D2887	4.46	---	---
(GCD) Initial Boiling Point	°C	*ASTM D2887	98.2	---	---
(GCD) 5% Distillation Point	°C	*ASTM D2887	335.5	---	---
(GCD) 10% Distillation Point	°C	*ASTM D2887	370.8	---	---
(GCD) 20% Distillation Point	°C	*ASTM D2887	402.6	---	---
(GCD) 30% Distillation Point	°C	*ASTM D2887	421.8	---	---
(GCD) 40% Distillation Point	°C	*ASTM D2887	436.3	---	---
(GCD) 50% Distillation Point	°C	*ASTM D2887	448.4	---	---
(GCD) 60% Distillation Point	°C	*ASTM D2887	459.6	---	---
(GCD) 70% Distillation Point	°C	*ASTM D2887	471.7	---	---
(GCD) 80% Distillation Point	°C	*ASTM D2887	485.9	---	---
(GCD) 90% Distillation Point	°C	*ASTM D2887	505.8	---	---
(GCD) FBP% Distillation Point	°C	*ASTM D2887	570.5	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color			no image	no image	no image
Bottom			no image	no image	no image

GRAPHS

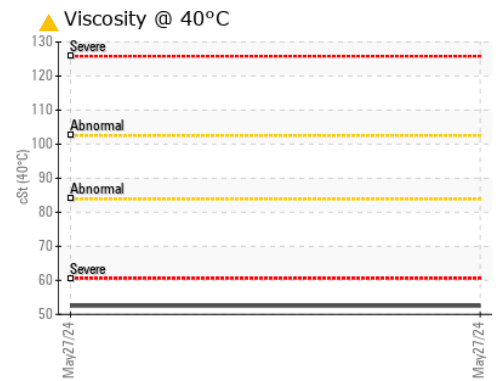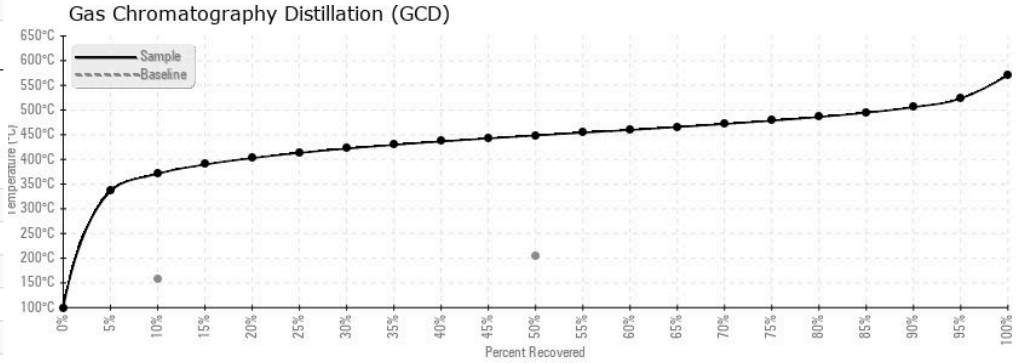

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TO10003416
Lab Number : 06193490
Unique Number : 11050242
Test Package : IND 2 (Additional Tests: COC Flash, GCD, KF, KV100, PntInsol, VIQontact: FRANCISCO DEL VALLE

ERGON - MEXICALI
 AVENIDA INDUSTRIAL PUEBLA #516, PARQUE INDUSTRIAL VALLE DE P
 MEXICALI, ZZ
 MX 21620
 francisco.delvalle@ergon.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: