



# OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id  
**VOLVO EC350E 310403**  
 Component  
**Diesel Engine**  
 Fluid  
 **DIESEL ENGINE OIL SAE 15W40 (--- GAL)**

## DIAGNOSIS

**Recommendation**  
 Resample at the next service interval to monitor.

**Wear**  
 All component wear rates are normal.

**Contamination**  
 There is no indication of any contamination in the oil.

**Fluid Condition**  
 The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>ML0001591</b>	---	---
Sample Date	Client Info		<b>23 May 2024</b>	---	---
Machine Age	hrs Client Info		<b>9621</b>	---	---
Oil Age	hrs Client Info		<b>0</b>	---	---
Oil Changed	Client Info		<b>Changed</b>	---	---
Sample Status			<b>NORMAL</b>	---	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>6.0	<b>&lt;1.0</b>	---	---
Water	WC Method	>0.1	<b>NEG</b>	---	---
Glycol	WC Method		<b>NEG</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m	>100	<b>3</b>	---	---
Chromium	ppm ASTM D5185m	>10	<b>0</b>	---	---
Nickel	ppm ASTM D5185m	>10	<b>0</b>	---	---
Titanium	ppm ASTM D5185m		<b>0</b>	---	---
Silver	ppm ASTM D5185m	>2	<b>0</b>	---	---
Aluminum	ppm ASTM D5185m	>10	<b>2</b>	---	---
Lead	ppm ASTM D5185m	>20	<b>&lt;1</b>	---	---
Copper	ppm ASTM D5185m	>15	<b>6</b>	---	---
Tin	ppm ASTM D5185m	>10	<b>&lt;1</b>	---	---
Vanadium	ppm ASTM D5185m		<b>0</b>	---	---
Cadmium	ppm ASTM D5185m		<b>0</b>	---	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	250	<b>67</b>	---	---
Barium	ppm ASTM D5185m	10	<b>0</b>	---	---
Molybdenum	ppm ASTM D5185m	100	<b>40</b>	---	---
Manganese	ppm ASTM D5185m		<b>&lt;1</b>	---	---
Magnesium	ppm ASTM D5185m	450	<b>473</b>	---	---
Calcium	ppm ASTM D5185m	3000	<b>1614</b>	---	---
Phosphorus	ppm ASTM D5185m	1150	<b>742</b>	---	---
Zinc	ppm ASTM D5185m	1350	<b>869</b>	---	---
Sulfur	ppm ASTM D5185m	4250	<b>2758</b>	---	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m	>20	<b>4</b>	---	---
Sodium	ppm ASTM D5185m	>158	<b>3</b>	---	---
Potassium	ppm ASTM D5185m	>20	<b>2</b>	---	---




## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	% *ASTM D7844	>3	<b>0.1</b>	---	---
Nitration	Abs/cm *ASTM D7624	>20	<b>6.4</b>	---	---
Sulfation	Abs/.1mm *ASTM D7415	>30	<b>21.4</b>	---	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414	>25	<b>19.2</b>	---	---
Base Number (BN)	mg KOH/g ASTM D2896	8.5	<b>9.4</b>	---	---





# OIL ANALYSIS REPORT

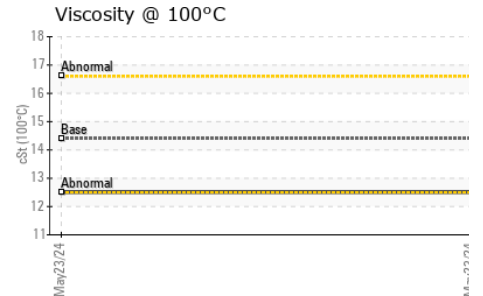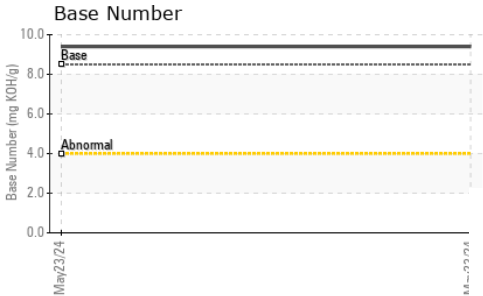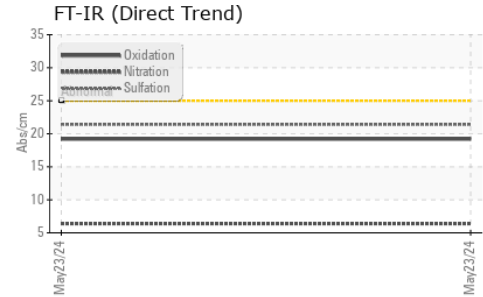

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	12.5	---

### GRAPHS

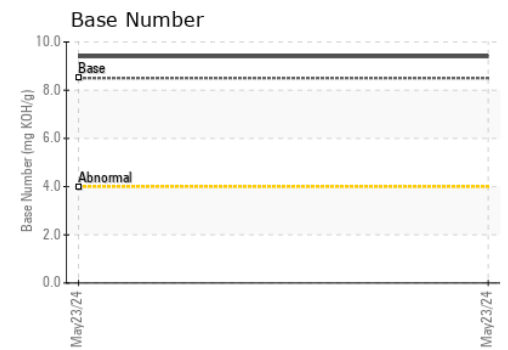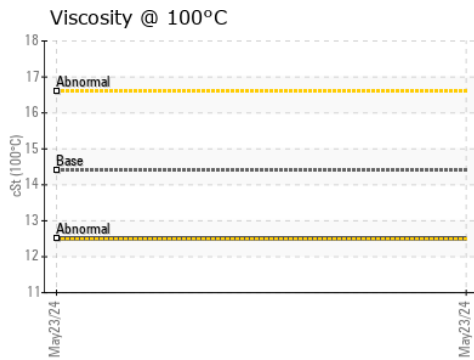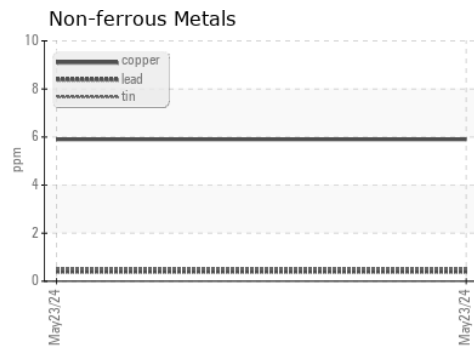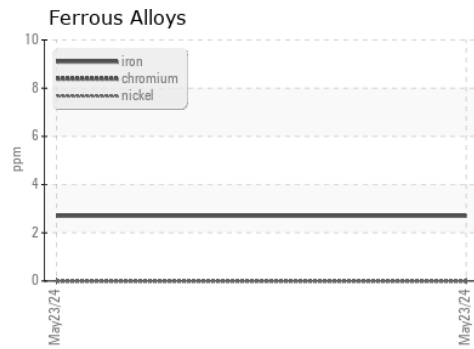

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : ML0001591      **Received** : 29 May 2024  
**Lab Number** : **06193715**      **Tested** : 30 May 2024  
**Unique Number** : 11050467      **Diagnosed** : 30 May 2024 - Sean Felton  
**Test Package** : CONST ( Additional Tests: TBN )

**WILLIAM HAZEL**  
 PO BOX 600  
 CHANTILLY, VA  
 US 20153

To discuss this sample report, contact Customer Service at 1-800-237-1369.

Contact: SERVICE MANAGER jimmy\_elswick@wahazel.com

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

T: (703)378-8300

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: