


OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id

VOLVO EC350E 310403

Hydraulic System

AW HYDRAULIC OIL ISO 46 (--- GAL)

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in

				May2024		
SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		ML0000373		
Sample Date		Client Info		23 May 2024		
Machine Age	hrs	Client Info		9621		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		Not Changd		
Sample Status				ATTENTION		
CONTAMINATIO	N	method	limit/base	current	history1	history2
Water		WC Method	>0.1	NEG		
WEAR METALS		method	limit/base	current	history1	history2
ron	ppm	ASTM D5185m	>25	27		
Chromium	ppm	ASTM D5185m	>10	<1		
Nickel	ppm		>10	0		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m		<1		
Aluminum	ppm	ASTM D5185m	>20	5		
_ead	ppm	ASTM D5185m	>20	1		
Copper	ppm	ASTM D5185m	>150	25		
Гin	ppm	ASTM D5185m	>10	<1		
√anadium	ppm	ASTM D5185m	710	<1		
Cadmium	ppm	ASTM D5185m		<1		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	5	48		
Barium	ppm	ASTM D5185m	5	0		
Molybdenum	ppm	ASTM D5185m	5	4		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m	25	23		
Calcium	ppm	ASTM D5185m	200	1695		
Phosphorus	ppm	ASTM D5185m	300	763		
Zinc	ppm	ASTM D5185m	370	927		
Sulfur	ppm	ASTM D5185m	2500	4794		
CONTAMINANT	S	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	14		
Sodium	ppm	ASTM D5185m		5		
Potassium	ppm	ASTM D5185m	>20	3		
FLUID CLEANLII	NESS	method	limit/base	current	history1	history2
Particles >4μm		ASTM D7647	>40000	62537		
Particles >6µm		ASTM D7647	>10000	5107		
Particles >14μm		ASTM D7647	>2500	264		
Particles >21μm		ASTM D7647	>640	43		
Particles >38μm		ASTM D7647	>160	1		
Particles >71μm		ASTM D7647	>40	0		
Oil Cleanliness		ISO 4406 (c)	>22/20/18	23/20/15		
FLUID DEGRAD	ATION	method	limit/base	current	history1	history2
A	1/01::	4.0TH D.04 :-				



OIL ANALYSIS REPORT

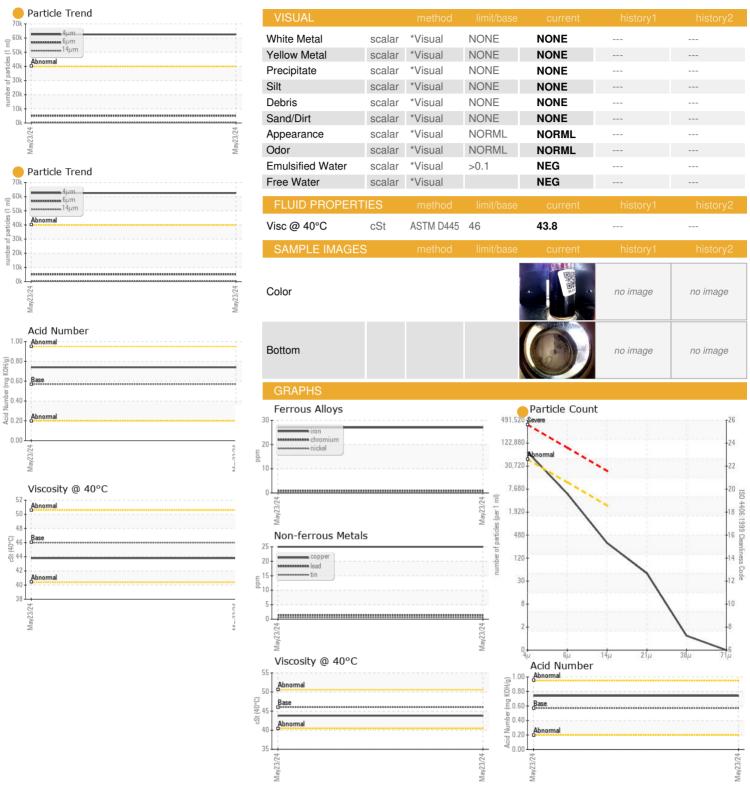



Certificate 12367

Sample No.

Lab Number : 06193930

: ML0000373 Unique Number : 11056053 Test Package : CONST

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 29 May 2024 **Tested** : 30 May 2024

Diagnosed : 31 May 2024 - Angela Borella

Contact: SERVICE MANAGER jimmy_elswick@wahazel.com T: (703)378-8300

Contact/Location: Service - SERVICE MANAGER ? - WILCHA

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: WILCHA [WUSCAR] 06193930 (Generated: 05/31/2024 16:14:03) Rev: 1

WILLIAM HAZEL

CHANTILLY, VA

PO BOX 600

US 20153