


OIL ANALYSIS REPORT

Area [24156669] **B21613 - 7 (S/N 69700022)**Component Gearbox

JAX MAGNA-PLATE 85W140-FG (--- GAL)

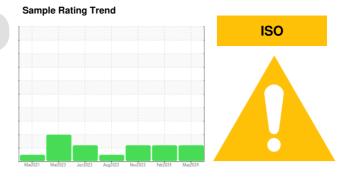

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0921317	WC0885472	WC0866686
Sample Date		Client Info		21 May 2024	07 Feb 2024	05 Nov 2023
Machine Age	yrs	Client Info		0	0	0
Oil Age	yrs	Client Info		1	0	0
Oil Changed		Client Info		Not Changd	N/A	N/A
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
CONTAMINATION	١	method	limit/base	current	history1	history2
Water		WC Method	>0.2	NEG	NEG	NEG
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	27	12	6
Chromium	ppm	ASTM D5185m	>15	0	0	0
Nickel	ppm	ASTM D5185m	>15	0	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m		<1	0	0
Aluminum	ppm	ASTM D5185m	>25	<1	0	0
Lead	ppm	ASTM D5185m	>100	<1	0	0
Copper	ppm		>200	15	7	10
Tin	ppm	ASTM D5185m	>25	2	0	<1
Vanadium	ppm	ASTM D5185m	720	- <1	0	<1
Cadmium	ppm	ASTM D5185m		<1	0	0
	ррш		11 11 11			
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		9	3	<1
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		<1	0	0
Magnesium	ppm	ASTM D5185m		1	0	0
Calcium	ppm	ASTM D5185m		133	41	11
Phosphorus	ppm	ASTM D5185m		450	448	405
Zinc	ppm	ASTM D5185m		0	0	0
Sulfur	ppm	ASTM D5185m		6201	5405	4894
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	2	<1	1
Sodium	ppm	ASTM D5185m		<1	0	0
Potassium	ppm	ASTM D5185m	>20	2	0	0
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>20000	<u> </u>	▲ 81599	<u></u> 104954
Particles >6µm		ASTM D7647	>5000	<u>^</u> 26582	8671	<u> </u>
Particles >14µm		ASTM D7647	>640	563	207	199
Particles >21µm		ASTM D7647	>160	86	31	31
Particles >38µm		ASTM D7647	>40	3	1	0
Particles >71µm		ASTM D7647	>10	1	0	0
Oil Cleanliness		ISO 4406 (c)	>21/19/16	<u>4</u> 24/22/16	<u>4</u> 24/20/15	<u>4</u> 24/21/15
		\-/				
FLUID DEGRADA	TION	method	limit/base	current	history1	history2

Acid Number (AN)


mg KOH/g ASTM D8045


0.70 0.64





OIL ANALYSIS REPORT

SAMPLE IMAGES

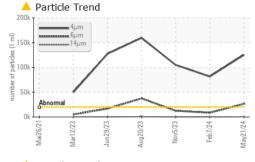







VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	TES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445		731	731	729

Color	
Bottom	


limit/base

current

history1

history2

method

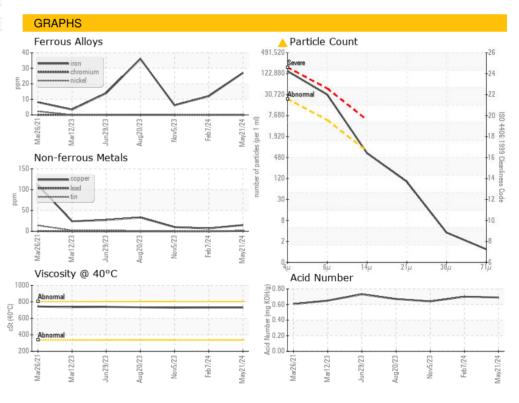





Certificate 12367

Laboratory Sample No.

: WC0921317 Lab Number : 06193952 Unique Number : 11056075

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 **Tested**

Received : 29 May 2024 Diagnosed

: 30 May 2024

: 31 May 2024 - Angela Borella

US 53511 Contact: Craig Bennett cabennett@hormel.com

3000 KENNEDY DRIVE

HORMEL FOODS-BELOIT

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Test Package : IND 2 (Additional Tests: PrtCount)

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: F: (608)365-8322

BELOIT, WI