


OIL ANALYSIS REPORT

Sample Rating Trend

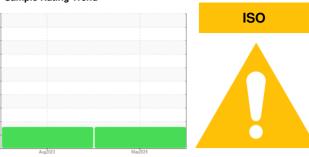

Machine Id

3017724 (S/N 1322)

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

			Aug2023	May2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA012356	KCPA005667	
Sample Date		Client Info		09 May 2024	07 Aug 2023	
Machine Age	hrs	Client Info		52889	49828	
Oil Age	hrs	Client Info		3061	0	
Oil Changed	1113	Client Info		Changed	N/A	
Sample Status		Ollerit IIIIO		ABNORMAL	ABNORMAL	
				ADNOMNAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	2	<1	
Chromium	ppm	ASTM D5185m	>10	0	0	
Nickel	ppm	ASTM D5185m	>3	0	0	
Titanium	ppm	ASTM D5185m	>3	<1	0	
Silver	ppm	ASTM D5185m	>2	<1	0	
Aluminum	ppm	ASTM D5185m	>10	<1	<1	
Lead	ppm	ASTM D5185m	>10	<1	<1	
Copper	ppm	ASTM D5185m	>50	2	3	
Tin	ppm	ASTM D5185m	>10	<1	0	
Vanadium	ppm	ASTM D5185m		<1	0	
Cadmium	ppm	ASTM D5185m		<1	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	
Barium	ppm	ASTM D5185m	90	39	36	
Molybdenum	ppm	ASTM D5185m	0	0	0	
Manganese	ppm	ASTM D5185m		<1	0	
Magnesium	ppm	ASTM D5185m	100	70	71	
Calcium	ppm	ASTM D5185m	0	3	1	
Phosphorus	ppm	ASTM D5185m	0	2	0	
Zinc	ppm	ASTM D5185m	0	11	12	
Sulfur	ppm	ASTM D5185m	23500	22364	25858	
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	<1	
Sodium	ppm	ASTM D5185m		37	26	
Potassium	ppm	ASTM D5185m	>20	6	5	
Water	%	ASTM D6304	>0.05	0.027	0.039	
ppm Water	ppm	ASTM D6304	>500	277	396.9	
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		56954	6035	
Particles >6µm		ASTM D7647	>1300	<u> </u>	<u>^</u> 2028	
Particles >14µm		ASTM D7647	>80	530	<u>^</u> 201	
Particles >21µm		ASTM D7647	>20	△ 63	<u>48</u>	
Particles >38µm		ASTM D7647	>4	1	2	
Particles >71μm		ASTM D7647	>3	0	0	
Oil Cleanliness		ISO 4406 (c)	>/17/13	23/21/16	2 0/18/15	
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.35	0.34	



OIL ANALYSIS REPORT

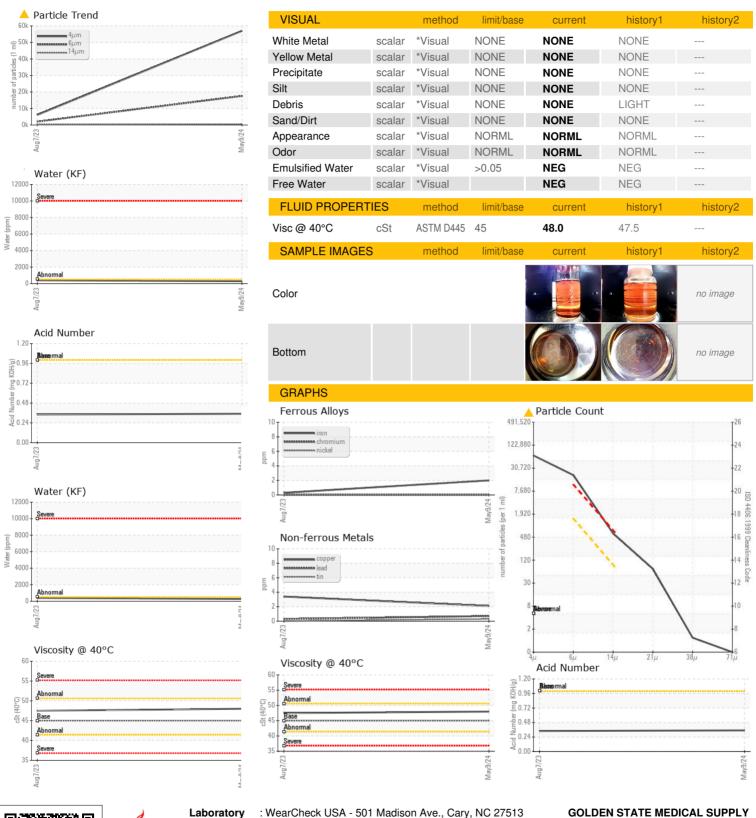





Certificate 12367

Laboratory Sample No.

: WearCheck USA - 501 Madison Ave., Cary, NC 27513

: KCPA012356 Lab Number : 06193976 Unique Number: 11056099

Received : 29 May 2024 **Tested** : 30 May 2024 Diagnosed : 31 May 2024 - Angela Borella

Test Package : IND 2 (Additional Tests: KF, PrtCount) To discuss this sample report, contact Customer Service at 1-800-237-1369.

 st - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: F:

5187 CAMINO RUIZ

Contact: Service Manager

CAMARILLO, CA

US 93012