




# **PROBLEM SUMMARY**



# Machine Id KAESER 7356398

#### Component Compressor Fluid KAESER SIGMA (OEM) M-460 (--- GAL)

# COMPONENT CONDITION SUMMARY

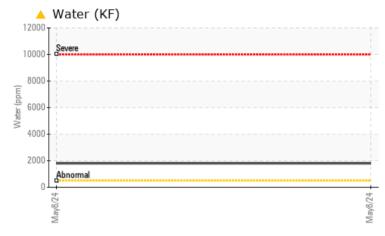

## RECOMMENDATION

Oil and filter change at the time of sampling has been noted. We recommend an early resample in 500 hours to monitor this condition.

PROBLEMATIC TEST RESULTS								
Sample Status				SEVERE				
Water	%	ASTM D6304	>0.05	<u> </u>				
ppm Water	ppm	ASTM D6304	>500	<u> </u>				
Emulsified Water	scalar	*Visual	>0.05	<u> </u>				
Free Water	scalar	*Visual		<b>▲</b> >10%				

Customer Id: MARGOLCA Sample No.: KCPA017212 Lab Number: 06193979 Test Package: IND 2



To manage this report scan the QR code

*To discuss the diagnosis or test data:* Jonathan Hester +1 919-379-4092 x4092 <u>jhester@wearcheckusa.com</u>

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS						
Action Statu Change Fluid	Status	Date	Done By	<b>Description</b> Oil and filter change at the time of sampling has been noted.		
Change Fluid		?	On and liner change at the time of sampling has been noted.			
Change Filter			?	Oil and filter change at the time of sampling has been noted.		

HISTORICAL DIAGNOSIS



# **OIL ANALYSIS REPORT**



Machine Id

# **KAESER** 7356398

#### Component Compressor Fluid KAESER SIGMA (OEM) M-460 (--- GAL)

# DIAGNOSIS

### Recommendation

Oil and filter change at the time of sampling has been noted. We recommend an early resample in 500 hours to monitor this condition.

## Wear

All component wear rates are normal.

# Contamination

Excessive free water present. There is a light concentration of water present in the oil. The amount and size of particulates present in the system are acceptable.


### Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA017212		
Sample Date		Client Info		08 May 2024		
Machine Age	hrs	Client Info		3493		
Oil Age	hrs	Client Info		973		
Oil Changed		Client Info		Changed		
Sample Status				SEVERE		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m	>3	0		
Titanium	ppm	ASTM D5185m	>3	<1		
Silver	ppm	ASTM D5185m	>2	<1		
Aluminum	ppm	ASTM D5185m	>10	0		
Lead	ppm	ASTM D5185m	>10	<1		
Copper	ppm	ASTM D5185m	>50	2		
Tin	ppm	ASTM D5185m	>10	<1		
Vanadium	ppm	ASTM D5185m		<1		
Cadmium	ppm	ASTM D5185m		<1		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0		
Barium	ppm	ASTM D5185m	90	2		
Molybdenum	ppm	ASTM D5185m	0	0		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m	100	2		
Calcium	ppm	ASTM D5185m	0	<1		
Phosphorus	ppm	ASTM D5185m	0	4		
Zinc	ppm	ASTM D5185m	0	25		
Sulfur	ppm	ASTM D5185m	23500	22098		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	2		
Sodium	ppm	ASTM D5185m		2		
Potassium	ppm	ASTM D5185m	>20	2		
Water	%	ASTM D6304	>0.05	<u> </u>		
opm Water	ppm	ASTM D6304	>500	<b>1800</b>		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		835		
Particles >6µm		ASTM D7647	>1300	455		
Particles >14µm		ASTM D7647	>80	77		
Particles >21µm		ASTM D7647	>20	26		
Particles >38µm		ASTM D7647	>4	4		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>/17/13	17/16/13		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2




# **OIL ANALYSIS REPORT**







Ĕ

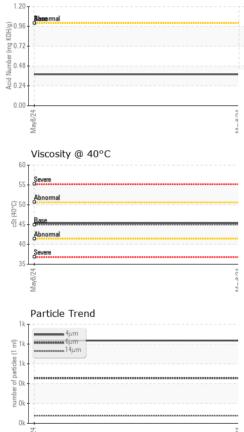

VISUAL		method	limit/bas	e current	history1	history2
White Metal	scalar	*Visual	NONE	NONE		
Yellow Metal	scalar	*Visual	NONE	NONE		
Precipitate	scalar	*Visual	NONE	NONE		
Silt	scalar	*Visual	NONE	NONE		
Debris	scalar	*Visual	NONE	NONE		
Sand/Dirt	scalar	*Visual	NONE	NONE		
Appearance	scalar	*Visual	NORML	NORML		
Odor	scalar	*Visual	NORML	NORML		
Emulsified Water	scalar	*Visual	>0.05	<b>6.2%</b>		
Free Water	scalar	*Visual		<mark>▲</mark> >10%		
FLUID PROPER	TIES	method	limit/bas	e current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	45.4		
SAMPLE IMAGE	S	method	limit/bas	e current	history1	history2
Color					no image	no image
Bottom					no image	no image
GRAPHS						
Ferrous Alloys				Particle Cour	nt	
10 iron			491	.520		T <sup>26</sup>
6			122	.880 -		-24
4			20	.720 -		22
2				,720-		-22
0				.680		-20 2
May8/24			May8/24 (per 1 ml	.920 -		18 5
			May8/24- number of particles (per 1 ml)	-		-10 50 -18 4 40 -16 0 00 -14 80 -14 80 -14 80 -14 80 -12 40 -12 -12 -12 40 -12 40 -12 -12 -12 -12 -12 -12 -12 -12 -12 -12 -12 -12 -12 -12 -12 -12
Non-ferrous Meta	ls		f partic	480		-16
8- copper			ther o	120-	1	+14 g
6 - tin			unu	30-		-12
4				50-		-12
2-				8 <b>Bereve</b> mal		10
24 <sup>1</sup> 0			24	2-		
May8/24			May8/24			
Viscosity @ 40°C				0 4μ Acid Number	14µ 21µ	38µ 71µ
60 J Severe			(B)	1.20		
55 - Severe Abnormal		*****	KOH/	0.96 - <b>Base</b> rmal		
45 - Abnormal			er (mg	0.72		
40 - Abnormal			Numb	Base mal		
35 Severe			Acid	0.24		
May8/24			May8/24 -	May8/24		May8/24 -
WearCheck USA - 50 KCPA017212 <mark>06193979</mark> 11056102	Recei Teste Diagr	ived : 29 ed : 03 nosed : 03	, NC 2751 May 2024 Jun 2024	3 I	1447	<b>G INDUSTRIES</b> 0 CALLE REAL GOLETA, CA US 93117
ND 2 (Additional Te			_		Contact: S	ervice Manage



Laboratory

Sample No.

Lab Number

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: Service Manager - MARGOLCA

T:

F: