




OIL ANALYSIS REPORT

Sample Rating Trend

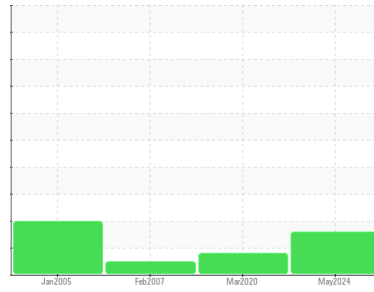

ISO



Machine Id
CSD-75 1867705 (S/N 1045)
 Component
Compressor
 Fluid
KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		KC130627	KC67445	KC006230
Sample Date	Client Info		21 May 2024	09 Mar 2020	20 Feb 2007
Machine Age	hrs	Client Info	55056	43376	14654
Oil Age	hrs	Client Info	6000	4165	3229
Oil Changed	Client Info		Changed	N/A	N/A
Sample Status			ABNORMAL	ABNORMAL	NORMAL

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	<1	1	<1
Chromium	ppm	ASTM D5185m >10	0	0	0
Nickel	ppm	ASTM D5185m	0	0	<1
Titanium	ppm	ASTM D5185m	<1	0	0
Silver	ppm	ASTM D5185m	<1	0	0
Aluminum	ppm	ASTM D5185m >25	<1	1	0
Lead	ppm	ASTM D5185m >25	<1	0	1
Copper	ppm	ASTM D5185m >50	2	10	11
Tin	ppm	ASTM D5185m >15	<1	0	0
Antimony	ppm	ASTM D5185m	---	0	9
Vanadium	ppm	ASTM D5185m	<1	0	0
Cadmium	ppm	ASTM D5185m	<1	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	1
Barium	ppm	ASTM D5185m 90	47	2	3
Molybdenum	ppm	ASTM D5185m	0	0	0
Manganese	ppm	ASTM D5185m	<1	<1	<1
Magnesium	ppm	ASTM D5185m 90	64	22	40
Calcium	ppm	ASTM D5185m 2	2	<1	0
Phosphorus	ppm	ASTM D5185m	1	0	5
Zinc	ppm	ASTM D5185m	8	20	30

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<1	<1	5
Sodium	ppm	ASTM D5185m	26	14	49
Potassium	ppm	ASTM D5185m >20	6	15	0
Water	%	ASTM D6304 >0.1	0.026	0.011	0.010
ppm Water	ppm	ASTM D6304 >1000	268	110.8	---






FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		33653	21539	2731
Particles >6µm	ASTM D7647 >2500		▲ 11828	▲ 6603	1010
Particles >14µm	ASTM D7647 >320		▲ 904	● 396	108
Particles >21µm	ASTM D7647 >80		▲ 200	78	25
Particles >38µm	ASTM D7647 >20		7	6	2
Particles >71µm	ASTM D7647 >4		1	2	0
Oil Cleanliness	ISO 4406 (c)	>18/15	▲ 21/17	▲ 20/16	17/14

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 0.4	0.35	0.410	0.462


OIL ANALYSIS REPORT

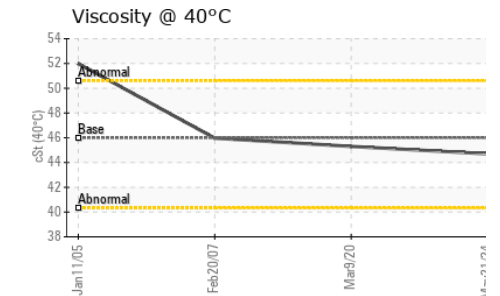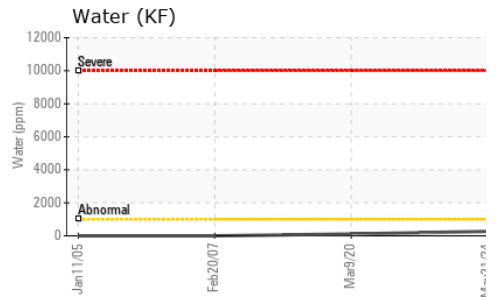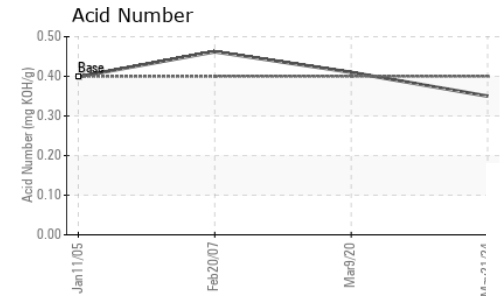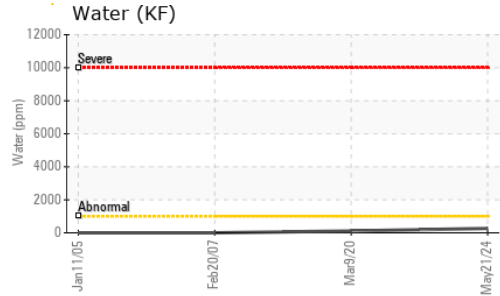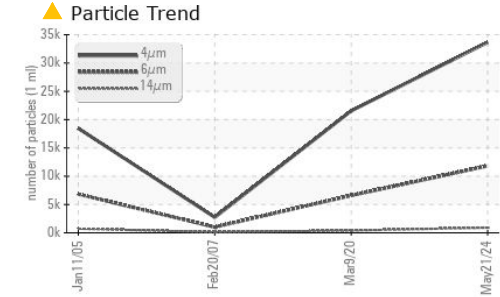






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	44.7	45.3

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

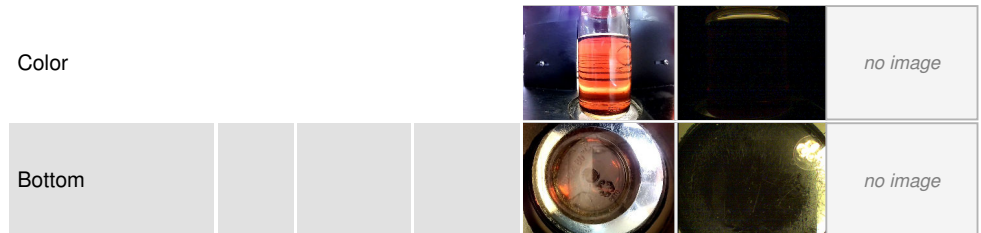

GRAPHS

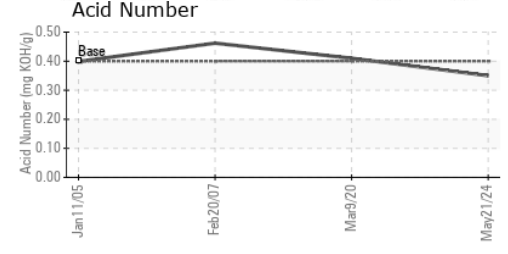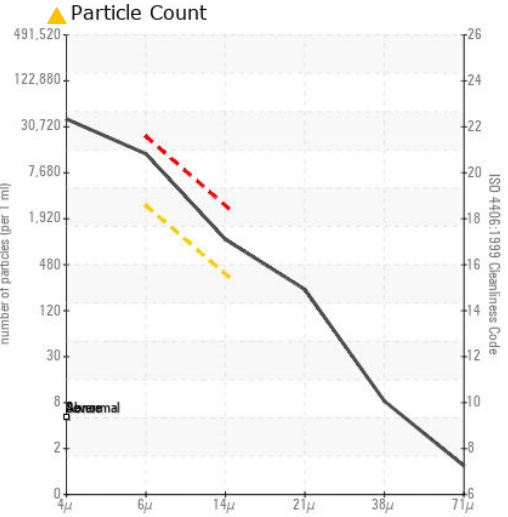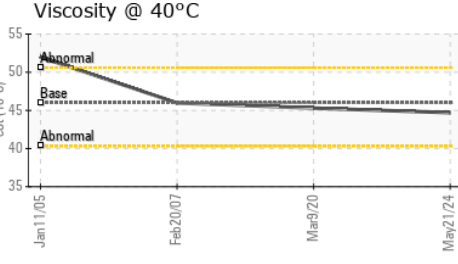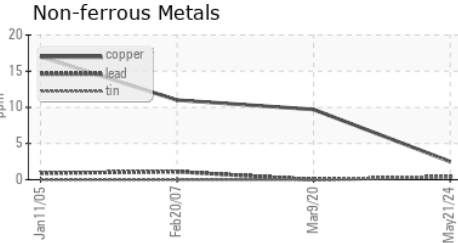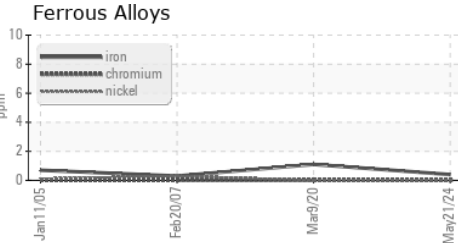

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KC130627
Lab Number : 06193987
Unique Number : 11056110
Test Package : IND 2
Received : 29 May 2024
Tested : 30 May 2024
Diagnosed : 31 May 2024 - Angela Borella

GEORGIA PACIFIC
 1 OWENS WAY
 BRADFORD, PA
 US 16701
 Contact: SERVICE MANAGER

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)