


OIL ANALYSIS REPORT







C-4 (S/N 10242N15290710) Refrigeration Compressor


FRICK COMPRESSOR OIL #11 (--- GAL)

DIAGNOSIS	SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Recommendation	Sample Number		Client Info		USP0012851	USP0007046	USP0000623
Resample at the next service interval to monitor.	Sample Date		Client Info		16 May 2024	07 Feb 2024	02 Aug 2023
Wear	Machine Age	hrs	Client Info		11423	0	6298
All component wear rates are normal.	Oil Age	hrs	Client Info		11423	0	6298
Contamination	Oil Changed		Client Info		N/A	N/A	N/A
There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.	Sample Status				NORMAL	NORMAL	NORMAL
	WEAR METALS		method	limit/base	current	history1	history2
	Iron	ppm	ASTM D5185m		0	0	0
Fluid Condition The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.	Chromium	ppm	ASTM D5185m		0	0	0
	Nickel		ASTM D5185m	12	0	0	0
		ppm			<1	0	0
	Titanium Silver	ppm	ASTM D5185m	. 0		0	
		ppm	ASTM D5185m		<1		0
	Aluminum	ppm	ASTM D5185m		0	0	0
	Lead	ppm	ASTM D5185m		<1	0	0
	Copper	ppm	ASTM D5185m		0	0	0
	Tin	ppm	ASTM D5185m	>4	<1	0	0
	Vanadium	ppm	ASTM D5185m		<1	0	0
	Cadmium	ppm	ASTM D5185m		<1	0	0
	ADDITIVES		method	limit/base	current	history1	history2
	Boron	ppm	ASTM D5185m		0	0	0
	Barium	ppm	ASTM D5185m		0	0	<1
	Molybdenum	ppm	ASTM D5185m		0	<1	0
	Manganese	ppm	ASTM D5185m		<1	0	0
	Magnesium	ppm	ASTM D5185m		<1	0	0
	Calcium	ppm	ASTM D5185m		0	0	0
	Phosphorus	ppm	ASTM D5185m		<1	0	0
	Zinc	ppm	ASTM D5185m		0	0	0
	Sulfur	ppm	ASTM D5185m		0	0	0
	CONTAMINANTS	3	method	limit/base	current	history1	history2
	Silicon	ppm	ASTM D5185m	>15	<1	<1	<1
	Sodium	ppm	ASTM D5185m		<1	0	0
	Potassium	ppm	ASTM D5185m	>20	2	0	<1
	Water	%	ASTM D6304		0.001	0.002	0.002
	ppm Water	ppm	ASTM D6304		7	18	18.8
	FLUID CLEANLIN	NESS	method	limit/base	current	history1	history2
	Particles >4µm		ASTM D7647	>10000	305	257	696
	Particles >6µm		ASTM D7647	>2500	53	81	182
	Particles >14µm		ASTM D7647		9	12	21
	Particles >21µm		ASTM D7647		3	3	5
	Particles >38µm		ASTM D7647		0	0	0
	Particles >71µm		ASTM D7647		0	0	0
	Oil Cleanliness		ISO 4406 (c)		15/13/10	15/14/11	17/15/12
	FLUID DEGRAD		method	limit/base		history1	history2
				- 1111/0430			
	Acid Number (AN)	mg KOH/g	ASTM D974		0.014	0.014	0.015


Contact/Location: Service Manager - RESPASWA Page 1 of 2




OIL ANALYSIS REPORT

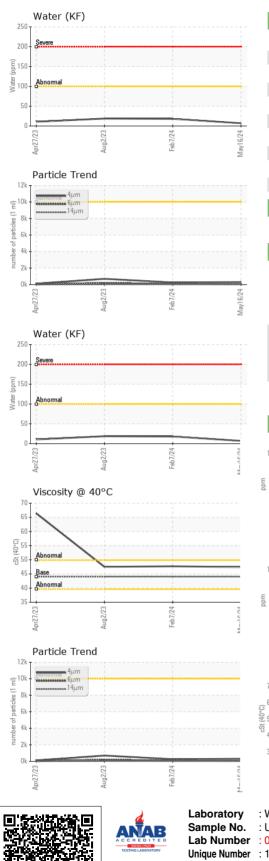

NONE NONE White Metal *Visual NONE NONE scalar Yellow Metal *Visual NONE NONE NONE NONE scalar NONE Precipitate scalar *Visua NONE NONE NONE Silt scalar *Visual NONE NONE NONE NONE *Visual NONE Debris NONE NONE NONE scalar Sand/Dirt NONE NONE NONE scalar *Visual NONE NORML Appearance *Visual NORML NORML NORML scalar Odor *Visual NORML NORML NORML NORML scalar **Emulsified Water** scalar *Visual >0.01 NEG NEG NEG Free Water scalar *Visual NEG NEG NEG FLUID PROPERTIES Visc @ 40°C cSt ASTM D445 44.0 47.4 47.7 47.5 SAMPLE IMAGES Color Bottom

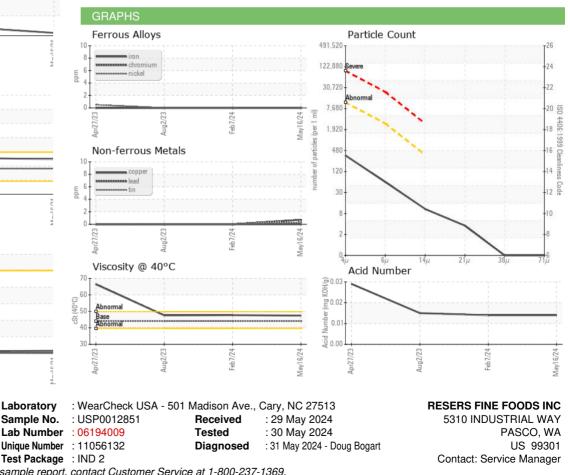



* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F:

Certificate 12367

Contact/Location: Service Manager - RESPASWA