



# OIL ANALYSIS REPORT

Sample Rating Trend



ISO



Machine Id

## RCB-03 (S/N XC0493)

Component

### Refrigeration Compressor

Fluid

### USPI 1009-68 SC (--- GAL)

#### DIAGNOSIS

##### ▲ Recommendation

Resample at the next service interval to monitor.

##### Wear

All component wear rates are normal.

##### ▲ Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

##### Fluid Condition

Viscosity confirmed. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

#### SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>USP0012820</b>	---	---
Sample Date	Client Info	<b>15 May 2024</b>	---	---
Machine Age	hrs Client Info	<b>37220</b>	---	---
Oil Age	hrs Client Info	<b>0</b>	---	---
Oil Changed	Client Info	<b>N/A</b>	---	---
Sample Status		<b>ABNORMAL</b>	---	---

#### WEAR METALS

method	limit/base	current	history1	history2
Iron ppm ASTM D5185m	>8	<b>2</b>	---	---
Chromium ppm ASTM D5185m	>2	<b>0</b>	---	---
Nickel ppm ASTM D5185m		<b>0</b>	---	---
Titanium ppm ASTM D5185m		<b>&lt;1</b>	---	---
Silver ppm ASTM D5185m	>2	<b>&lt;1</b>	---	---
Aluminum ppm ASTM D5185m	>3	<b>&lt;1</b>	---	---
Lead ppm ASTM D5185m	>2	<b>&lt;1</b>	---	---
Copper ppm ASTM D5185m	>8	<b>0</b>	---	---
Tin ppm ASTM D5185m	>4	<b>&lt;1</b>	---	---
Vanadium ppm ASTM D5185m		<b>&lt;1</b>	---	---
Cadmium ppm ASTM D5185m		<b>&lt;1</b>	---	---

#### ADDITIVES

method	limit/base	current	history1	history2
Boron ppm ASTM D5185m		<b>0</b>	---	---
Barium ppm ASTM D5185m		<b>0</b>	---	---
Molybdenum ppm ASTM D5185m		<b>0</b>	---	---
Manganese ppm ASTM D5185m		<b>&lt;1</b>	---	---
Magnesium ppm ASTM D5185m		<b>&lt;1</b>	---	---
Calcium ppm ASTM D5185m		<b>0</b>	---	---
Phosphorus ppm ASTM D5185m		<b>&lt;1</b>	---	---
Zinc ppm ASTM D5185m		<b>0</b>	---	---
Sulfur ppm ASTM D5185m	50	<b>10</b>	---	---

#### CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm ASTM D5185m	>15	<b>1</b>	---	---
Sodium ppm ASTM D5185m		<b>&lt;1</b>	---	---
Potassium ppm ASTM D5185m	>20	<b>2</b>	---	---
Water % ASTM D6304	>0.01	<b>0.002</b>	---	---
ppm Water ppm ASTM D6304	>100	<b>16</b>	---	---

#### FLUID CLEANLINESS






method	limit/base	current	history1	history2
Particles >4µm ASTM D7647	>10000	<b>▲ 22026</b>	---	---
Particles >6µm ASTM D7647	>2500	<b>● 3917</b>	---	---
Particles >14µm ASTM D7647	>320	<b>107</b>	---	---
Particles >21µm ASTM D7647	>80	<b>20</b>	---	---
Particles >38µm ASTM D7647	>20	<b>1</b>	---	---
Particles >71µm ASTM D7647	>4	<b>0</b>	---	---
Oil Cleanliness ISO 4406 (c)	>20/18/15	<b>▲ 22/19/14</b>	---	---

#### FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN) mg KOH/g ASTM D974	0.005	<b>0.014</b>	---	---



# OIL ANALYSIS REPORT

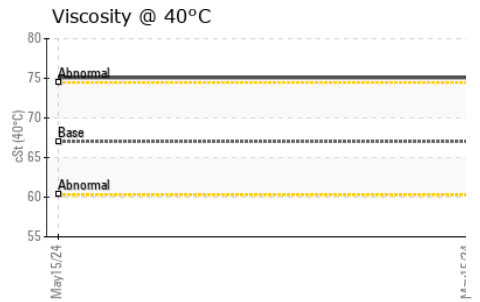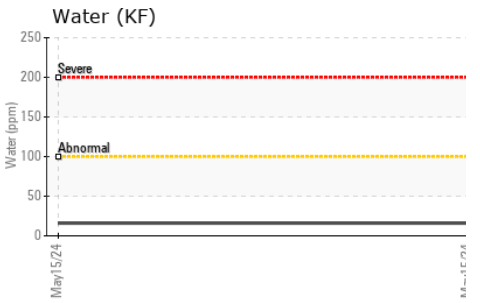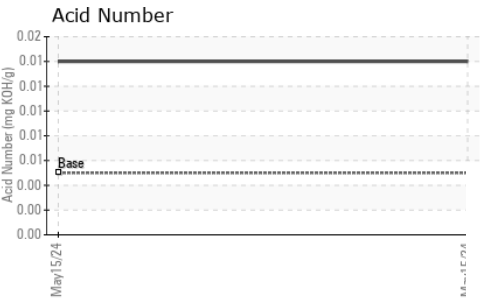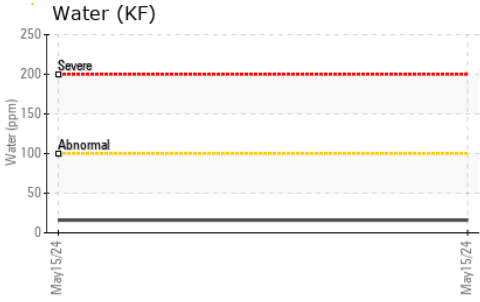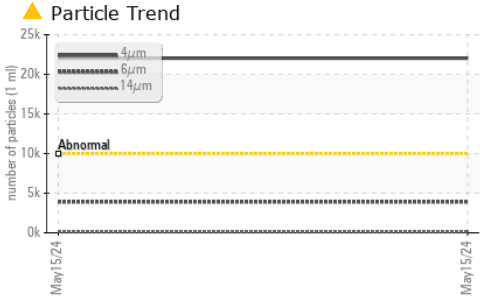






VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	LIGHT	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.01	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	67	75.09	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image
Bottom				no image	no image

## GRAPHS

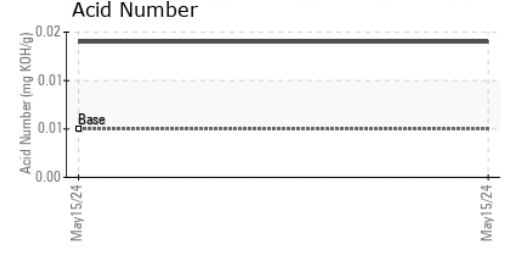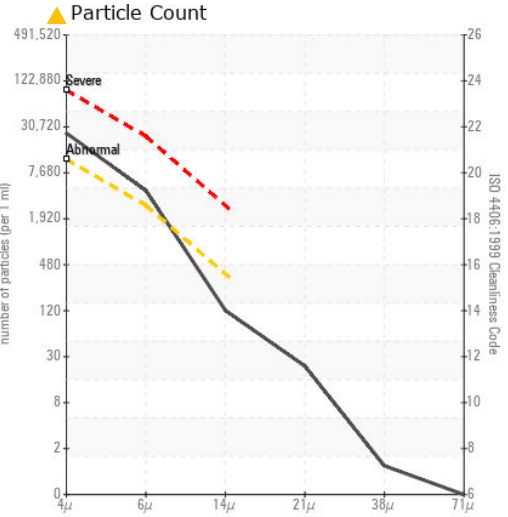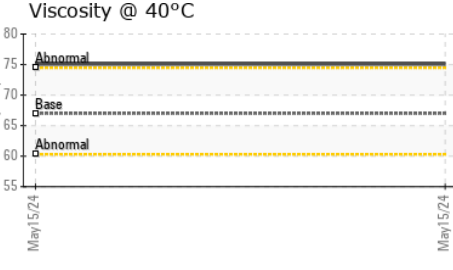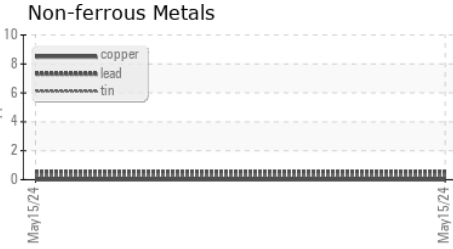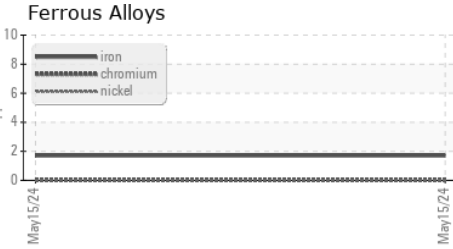

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : USP0012820  
**Lab Number** : 06194032  
**Unique Number** : 11056155  
**Test Package** : IND 2

**Received** : 29 May 2024  
**Tested** : 03 Jun 2024  
**Diagnosed** : 05 Jun 2024 - Doug Bogart

**TYSON ADVANCE - ST JOHN**  
 ADVANCE PIERRE FOODS, 70 ST JOHN ST  
 PORTLAND, ME  
 US 04102  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: