

OIL ANALYSIS REPORT

Area Refrigeration 11 High Stage Compressor NCR (S/N 3215047)

Refrigeration Compressor

Fluid COLD STAR CS-2033-SC (150 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



Sample Rating Trend

SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0892838	WC0892846	WC0632338
Sample Date		Client Info		16 May 2024	20 Dec 2023	16 Dec 2021
Machine Age	hrs	Client Info		52493	50027	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Filtered	Filtered	N/A
Sample Status				NORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>8	<1	0	<1
Chromium	ppm	ASTM D5185m	>2	0	0	0
Nickel	ppm	ASTM D5185m		0	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>2	<1	0	<1
Aluminum	ppm	ASTM D5185m	>3	0	0	0
Lead	ppm	ASTM D5185m	>2	<1	0	0
Copper	ppm	ASTM D5185m	>8	0	0	0
Tin	ppm	ASTM D5185m	>4	<1	0	0
Antimony	ppm	ASTM D5185m				0
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		<1	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		<1	<1	0
Magnesium	ppm	ASTM D5185m		<1	<1	0
Calcium	ppm	ASTM D5185m		0	<1	0
Phosphorus	ppm	ASTM D5185m		4	3	8
Zinc	ppm	ASTM D5185m		0	0	0
Sulfur	ppm	ASTM D5185m		0	0	2
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1	0	<1
Sodium	ppm	ASTM D5185m		<1	0	0
Potassium	ppm	ASTM D5185m	>20	1	0	0
Water	%	ASTM D6304	>0.01	0.002	0.002	0.002
ppm Water	ppm	ASTM D6304	>100	21	21	21.1
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	1625	1390	2867
Particles >6µm		ASTM D7647	>2500	223	360	571
Particles >14µm		ASTM D7647	>320	8	17	20
Particles >21µm		ASTM D7647	>80	3	2	4
Particles >38µm		ASTM D7647	>20	0	0	0
Particles >71µm		ASTM D7647	>4	0	0	0
Oil Cleanliness		ISO 4406 (c)	>20/18/15	18/15/10	18/16/11	19/16/11

FLUID DEGRADATION Acid Number (AN)


Report Id: TROBRA [WUSCAR] 06194044 (Generated: 05/31/2024 19:33:33) Rev: 1


mg KOH/g ASTM D974


0.014 0.012 0.014 Contact/Location: STEVE RIEDEL - TROBRA





OIL ANALYSIS REPORT

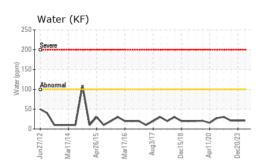

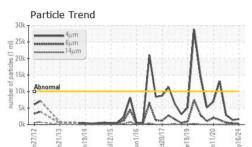






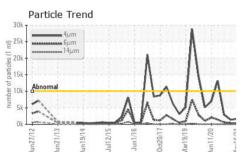

VISUAL		method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE	
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE	
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE	
Silt	scalar	*Visual	NONE	NONE	LIGHT	NONE	
Debris	scalar	*Visual	NONE	NONE	NONE	NONE	
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE	
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML	
Odor	scalar	*Visual	NORML	NORML	NORML	NORML	
Emulsified Water	scalar	*Visual	>0.01	NEG	NEG	NEG	
Free Water	scalar	*Visual		NEG	NEG	NEG	
FLUID PROPERT	TIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445		69.8	69.9	66.5	
SAMPLE IMAGES	6	method	limit/base	current	history1	history2	
Color				a			

Bottom

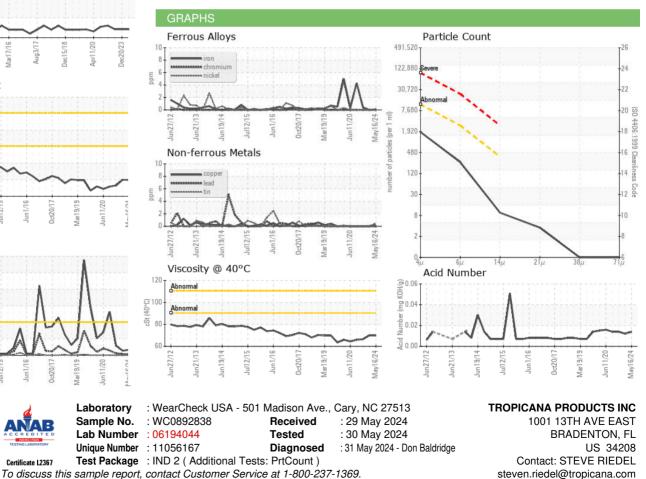

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: TROBRA [WUSCAR] 06194044 (Generated: 05/31/2024 19:33:33) Rev: 1

Certificate 12367

Contact/Location: STEVE RIEDEL - TROBRA

T: (941)742-2992

F: (941)749-3980