

OIL ANALYSIS REPORT


CTL74

CTL 74 SIDE TRIMMER MAIN (B/S) (S/N 16-5210-0175)

Gearbox

Eluid

NOT GIVEN (--- QTS)





DIAGNOSIS

Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

The water content is negligible. There is no indication of any contamination in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	NOITAN	method	limit/base	current	history1	history2
Sample Number		Client Info		RP0042108	RP0028662	RP0023434
Sample Date		Client Info		28 May 2024	15 Jul 2022	07 Jan 2022
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184		16	22	29
Iron	ppm	ASTM D5185m	>200	4	23	31
Chromium	ppm	ASTM D5185m	>15	<1	0	<1
Nickel	ppm	ASTM D5185m	>15	<1	0	0
Titanium	ppm	ASTM D5185m		<1	0	<1
Silver	ppm	ASTM D5185m		1	0	<1
Aluminum	ppm	ASTM D5185m	>25	1	1	4
Lead	ppm	ASTM D5185m	>100	<1	2	3
Copper	ppm	ASTM D5185m	>200	9	18	23
Tin	ppm	ASTM D5185m	>25	1	<1	<1
Antimony	ppm	ASTM D5185m	>5			2
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		<1	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		14	<1	1
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		<1	0	<1
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		5	1	<1
Calcium	ppm	ASTM D5185m		<1	11	18
Phosphorus	ppm	ASTM D5185m		181	82	109
Zinc	ppm	ASTM D5185m		6	16	16
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	3	2	3
Sodium	ppm	ASTM D5185m		0	0	<1
Potassium	ppm	ASTM D5185m	>20	<1	2	1
Water	%	ASTM D6304	>0.2	0.003	0.015	0.002
ppm Water	ppm	ASTM D6304	>2000	35	150.0	17.7
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.43	0.38	0.309



OIL ANALYSIS REPORT

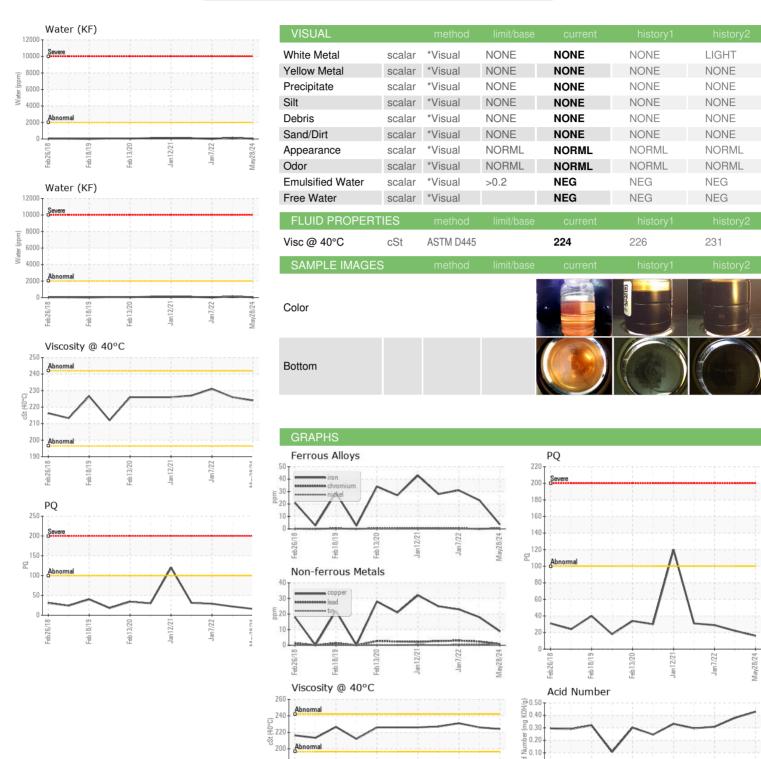





Certificate 12367

Laboratory Sample No.

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : RP0042108 Lab Number : 06194115 Unique Number : 11056238

180

Test Package : IND 2 (Additional Tests: PQ)

Tested Diagnosed

Jan 12/21

Received

Jan7/22 -

: 30 May 2024 : 30 May 2024 - Wes Davis

: 29 May 2024

0.00 kg

To discuss this sample report, contact Customer Service at 1-800-237-1369.

 st - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

OUTOKUMPU STAINLESS USA

Jan 12/21

HWY 43 N CALVERT, AL US 36513

Contact: MARIO JOHNSON Mario.johnson@outokumpu.com T: (251)321-4105

F: x:

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)