

## **OIL ANALYSIS REPORT**

### Area **CTL74 CTL 74 ENTRY SCREW DOWN Right Gearbox** NOT GIVEN (--- QTS)

#### DIAGNOSIS

#### Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

#### Wear

All component wear rates are normal.

#### Contamination

The water content is negligible. There is no indication of any contamination in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		Aug2018	Oct2019 Jul2020	Jun2021 Jul2022 N	iov2023	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		RP0042484	RP0038594	RP0029616
Sample Date		Client Info		28 May 2024	02 Nov 2023	17 Apr 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184		15	9	14
Iron	ppm	ASTM D5185m	>200	4	2	3
Chromium	ppm	ASTM D5185m	>15	<1	<1	0
Nickel	ppm	ASTM D5185m	>15	1	0	1
Titanium	ppm	ASTM D5185m		<1	0	<1
Silver	ppm	ASTM D5185m		1	0	0
Aluminum	ppm	ASTM D5185m	>25	2	2	1
Lead	ppm	ASTM D5185m	>100	<1	0	0
Copper	ppm	ASTM D5185m	>200	26	15	55
Tin	ppm	ASTM D5185m	>25	3	<1	5
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		<1	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	19	0
Molybdenum	ppm	ASTM D5185m		<1	0	<1
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m		16	10	76
Calcium	ppm	ASTM D5185m		48	32	65
Phosphorus	ppm	ASTM D5185m		124	112	23
Zinc	ppm	ASTM D5185m		266	179	1673
CONTAMINANTS	6	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	5	3	6
Sodium	ppm	ASTM D5185m		2	0	1
Potassium	ppm	ASTM D5185m	>20	1	<1	<1
Water	%	ASTM D6304	>0.2	0.004	0.006	0.016
ppm Water	ppm	ASTM D6304	>2000	48	63.3	166.0
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.45	0.42	2.24

Sample Rating Trend



NORMAL



Water (ppm)

Water (ppm)

cSt (40°C)

Aug22/

PQ

20


150 Ы

100


50

ug22/1

# **OIL ANALYSIS REPORT**

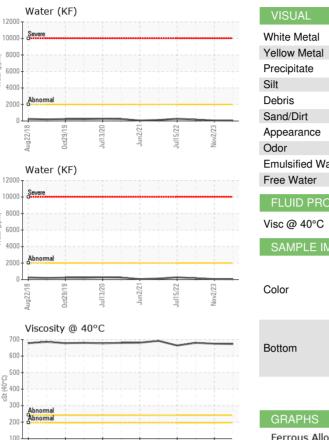



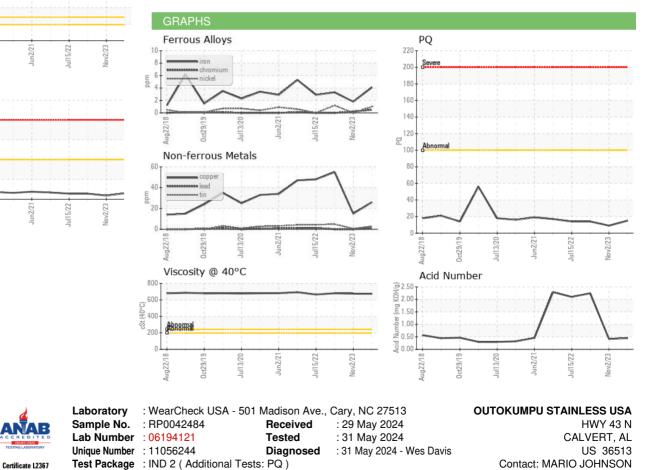

To discuss this sample report, contact Customer Service at 1-800-237-1369. \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: OUTCALAL [WUSCAR] 06194121 (Generated: 05/31/2024 17:36:29) Rev: 1

Submitted By: DALE ROBINSON

Mario.johnson@outokumpu.com

Page 2 of 2

F: x:

T: (251)321-4105