


OIL ANALYSIS REPORT

CTL74

CTL 74 CUT TO LENGTH SHEAR (ROTORY) (S/N 16-5210-0245)

Gearbox

NOT GIVEN (--- QTS)





DIAGNOSIS

Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

The water content is negligible. There is no indication of any contamination in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	NOITAN	method	limit/base	current	history1	history2
Sample Number		Client Info		RP0042483	RP0035319	RP0029615
Sample Date		Client Info		28 May 2024	02 Nov 2023	17 Apr 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184		19	19	21
Iron	ppm	ASTM D5185m	>200	20	16	19
Chromium	ppm	ASTM D5185m	>15	<1	<1	0
Nickel	ppm	ASTM D5185m	>15	<1	0	<1
Titanium	ppm	ASTM D5185m		1	0	0
Silver	ppm	ASTM D5185m		1	0	0
Aluminum	ppm	ASTM D5185m	>25	1	2	<1
Lead	ppm	ASTM D5185m	>100	1	<1	0
Copper	ppm	ASTM D5185m	>200	3	2	3
Tin	ppm	ASTM D5185m	>25	<1	0	0
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		<1	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<1	<1	0
Barium	ppm	ASTM D5185m		0	19	0
Molybdenum	ppm	ASTM D5185m		<1	0	0
Manganese	ppm	AOTAL DELOE			•	al .
i i i gui i o o o	ppiii	ASTM D5185m		<1	0	<1
•	ppm	ASTM D5185m ASTM D5185m		<1 1	1	2
Magnesium						
Magnesium Calcium	ppm	ASTM D5185m		1	1	2
Magnesium Calcium Phosphorus	ppm	ASTM D5185m ASTM D5185m		1 21	1 22	2 27
Magnesium Calcium Phosphorus	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m	limit/base	1 21 107	1 22 139	2 27 132
Magnesium Calcium Phosphorus Zinc CONTAMINANTS	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	limit/base >50	1 21 107 4	1 22 139 11	2 27 132 9
Magnesium Calcium Phosphorus Zinc CONTAMINANTS Silicon	ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m method		1 21 107 4 current	1 22 139 11 history1	2 27 132 9 history2
Magnesium Calcium Phosphorus Zinc CONTAMINANTS Silicon Sodium	ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D5185m		1 21 107 4 current	1 22 139 11 history1	2 27 132 9 history2
Magnesium Calcium Phosphorus Zinc CONTAMINANTS Silicon Sodium Potassium	ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D5185m ASTM D5185m	>50	1 21 107 4 current 5 <1	1 22 139 11 history1 4 <1	2 27 132 9 history2 4 <1
Magnesium Calcium Phosphorus Zinc CONTAMINANTS Silicon Sodium Potassium Water	ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m Method ASTM D5185m ASTM D5185m ASTM D5185m	>50 >20	1 21 107 4 current 5 <1 1	1 22 139 11 history1 4 <1 1	2 27 132 9 history2 4 <1 <1
Magnesium Calcium Phosphorus Zinc CONTAMINANTS	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	>50 >20 >0.2	1 21 107 4 current 5 <1 1 0.004	1 22 139 11 history1 4 <1 1 0.006	2 27 132 9 history2 4 <1 <1 0.009



OIL ANALYSIS REPORT

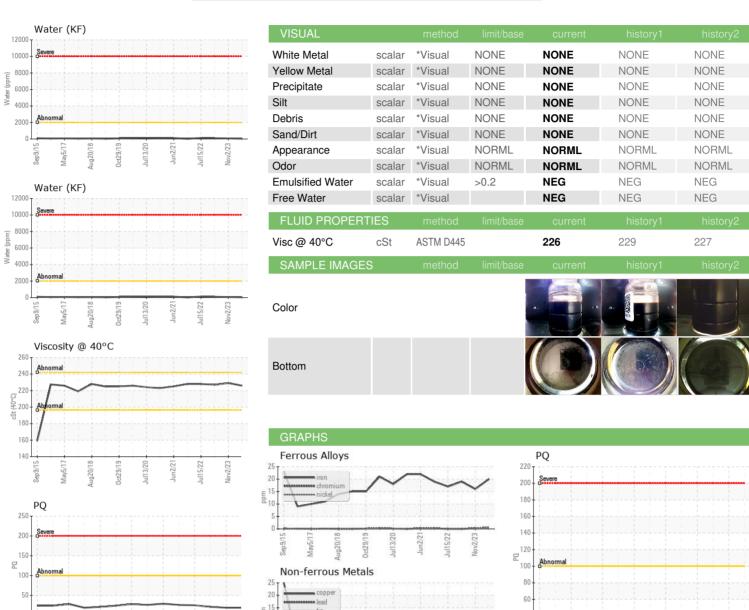





Certificate 12367

Laboratory

Sample No.

: RP0042483 Lab Number : 06194127 Unique Number : 11056250

300

(3°C)+ (40°C)

100

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received Tested

: 29 May 2024 Diagnosed

: 30 May 2024 : 30 May 2024 - Wes Davis

40

(B 0.40 0.30

0.20 를 0.10 00.00 PG Acid Number

Test Package : IND 2 (Additional Tests: PQ) To discuss this sample report, contact Customer Service at 1-800-237-1369.

Viscosity @ 40°C

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

OUTOKUMPU STAINLESS USA

HWY 43 N CALVERT, AL US 36513

Contact: MARIO JOHNSON Mario.johnson@outokumpu.com T: (251)321-4105

F: x: