

Sample Rating Trend

WEAR



KAESER ASD 40S 9337173 (S/N 1347)

Component Compressor

Fluid KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

🔺 Wear

The aluminum level is abnormal. All other component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| SAMPLE INFORM | | method | limit/base | current | history1 | history2 |
|------------------------------------|------|--------------|------------|-------------|----------|----------|
| Sample Number | | Client Info | | KC125180 | | |
| Sample Date | | Client Info | | 30 Apr 2024 | | |
| Machine Age | hrs | Client Info | | 3545 | | |
| Oil Age | hrs | Client Info | | 0 | | |
| Oil Changed | | Client Info | | N/A | | |
| Sample Status | | | | ABNORMAL | | |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | >50 | 3 | | |
| Chromium | ppm | ASTM D5185m | >10 | <1 | | |
| Nickel | ppm | ASTM D5185m | >3 | <1 | | |
| Titanium | ppm | ASTM D5185m | >3 | <1 | | |
| Silver | ppm | ASTM D5185m | >2 | 1 | | |
| Aluminum | ppm | ASTM D5185m | >10 | <u> </u> | | |
| Lead | ppm | ASTM D5185m | >10 | <1 | | |
| Copper | ppm | ASTM D5185m | >50 | 1 | | |
| Tin | ppm | ASTM D5185m | >10 | <1 | | |
| Vanadium | ppm | ASTM D5185m | | <1 | | |
| Cadmium | ppm | ASTM D5185m | | <1 | | |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | | 0 | | |
| Barium | ppm | ASTM D5185m | 90 | 0 | | |
| Molybdenum | ppm | ASTM D5185m | | <1 | | |
| Manganese | ppm | ASTM D5185m | | <1 | | |
| Magnesium | ppm | ASTM D5185m | 90 | <1 | | |
| Calcium | ppm | ASTM D5185m | 2 | 0 | | |
| Phosphorus | ppm | ASTM D5185m | | 41 | | |
| Zinc | ppm | ASTM D5185m | | 0 | | |
| CONTAMINANTS | ; | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185m | >25 | <1 | | |
| Sodium | ppm | ASTM D5185m | | 0 | | |
| Potassium | ppm | ASTM D5185m | >20 | <1 | | |
| Water | % | ASTM D6304 | >0.05 | 0.006 | | |
| ppm Water | ppm | ASTM D6304 | >500 | 64 | | |
| FLUID CLEANLIN | IESS | method | limit/base | current | history1 | history2 |
| Particles >4µm | | ASTM D7647 | | 8496 | | |
| Particles >6µm | | ASTM D7647 | >1300 | <u> </u> | | |
| Particles >14µm | | ASTM D7647 | >80 | <u> </u> | | |
| Particles >21µm | | ASTM D7647 | >20 | <u> </u> | | |
| | | ASTM D7647 | >4 | 3 | | |
| Particles >38µm | | AGTIVI D7047 | | 5 | | |
| Particles >38µm Particles >71µm | | ASTM D7647 | >3 | 0 | | |
| | | | | | | |
| Particles >71µm | TION | ASTM D7647 | >3 | 0 | | |



Built for a lifetime

OIL ANALYSIS REPORT

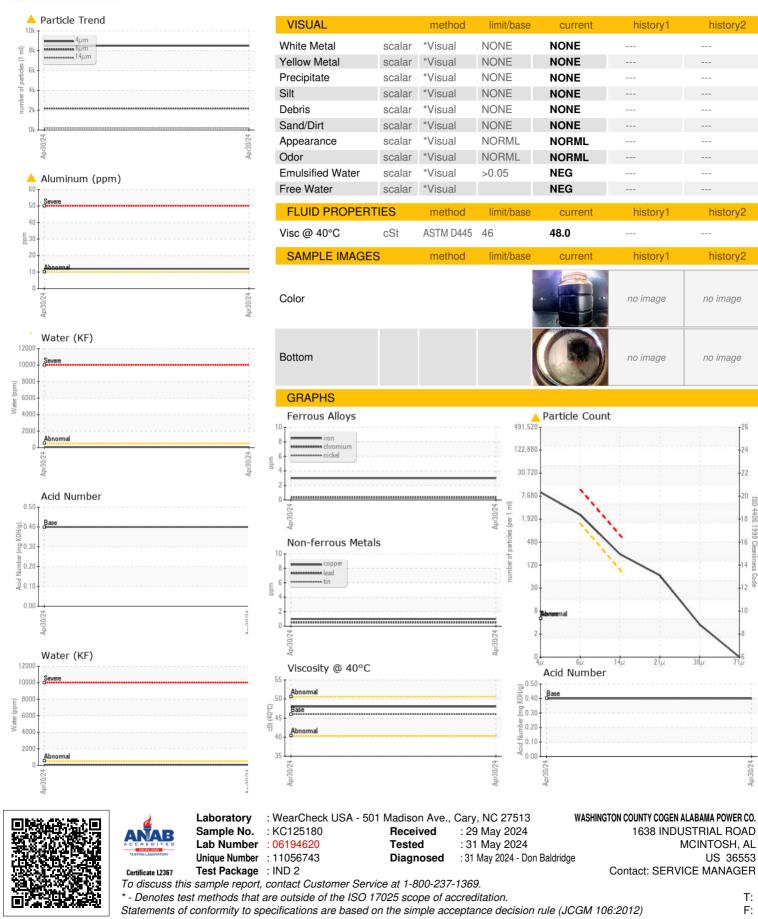

Report Id: WASMCI [WUSCAR] 06194620 (Generated: 05/31/2024 19:52:08) Rev: 1

Contact/Location: SERVICE MANAGER ? - WASMCI