




# OIL ANALYSIS REPORT

## Sample Rating Trend

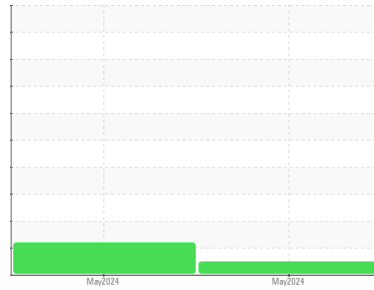

**NORMAL**



Machine Id  
**PORTABLE FILTRATION FOR GEARBOXES**  
 Component  
**Gearbox**  
 Fluid  
**{not provided} (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>USPM36318</b>	USPM36316	---
Sample Date	Client Info		<b>28 May 2024</b>	27 May 2024	---
Machine Age	hrs	Client Info	<b>0</b>	0	---
Oil Age	hrs	Client Info	<b>0</b>	0	---
Oil Changed	Client Info		<b>N/A</b>	N/A	---
Sample Status			<b>NORMAL</b>	ATTENTION	---

### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >200	<b>&lt;1</b>	<1	---
Chromium	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	---
Nickel	ppm	ASTM D5185m >15	<b>&lt;1</b>	1	---
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	---
Silver	ppm	ASTM D5185m	<b>1</b>	1	---
Aluminum	ppm	ASTM D5185m >25	<b>1</b>	1	---
Lead	ppm	ASTM D5185m >100	<b>&lt;1</b>	<1	---
Copper	ppm	ASTM D5185m >200	<b>1</b>	<1	---
Tin	ppm	ASTM D5185m >25	<b>&lt;1</b>	<1	---
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	---
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	---

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>0</b>	0	---
Barium	ppm	ASTM D5185m	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m	<b>&lt;1</b>	<1	---
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	---
Calcium	ppm	ASTM D5185m	<b>0</b>	0	---
Phosphorus	ppm	ASTM D5185m	<b>40</b>	0	---
Zinc	ppm	ASTM D5185m	<b>0</b>	0	---
Sulfur	ppm	ASTM D5185m	<b>44</b>	0	---

### CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >50	<b>2</b>	2	---
Sodium	ppm	ASTM D5185m	<b>0</b>	0	---
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	---
Water	%	ASTM D6304 >0.2	<b>0.053</b>	0.018	---
ppm Water	ppm	ASTM D6304 >2000	<b>539</b>	183	---

### FLUID CLEANLINESS






	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>10000	<b>329</b>	3855	---
Particles >6µm	ASTM D7647	>2500	<b>103</b>	1603	---
Particles >14µm	ASTM D7647	>320	<b>13</b>	405	---
Particles >21µm	ASTM D7647	>80	<b>4</b>	125	---
Particles >38µm	ASTM D7647	>20	<b>1</b>	6	---
Particles >71µm	ASTM D7647	>4	<b>0</b>	0	---
Oil Cleanliness	ISO 4406 (c)	>20/18/15	<b>16/14/11</b>	19/18/16	---

### FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	<b>0.20</b>	0.48	---




# OIL ANALYSIS REPORT

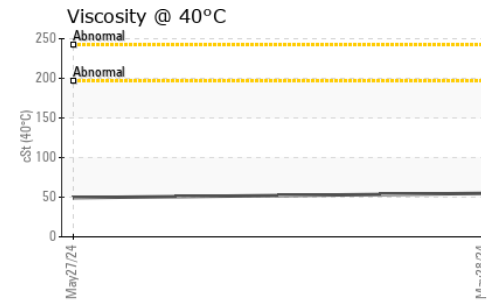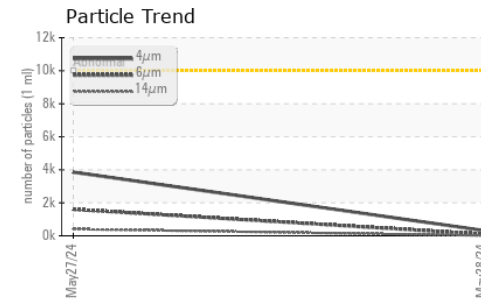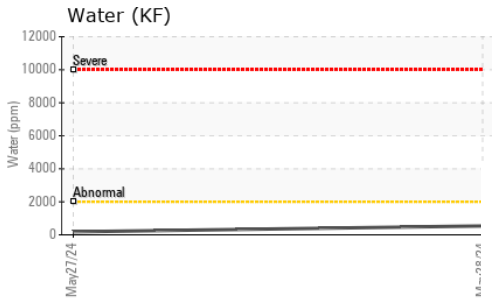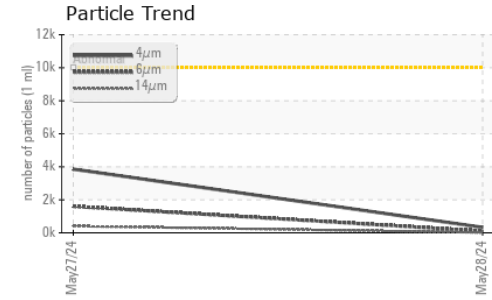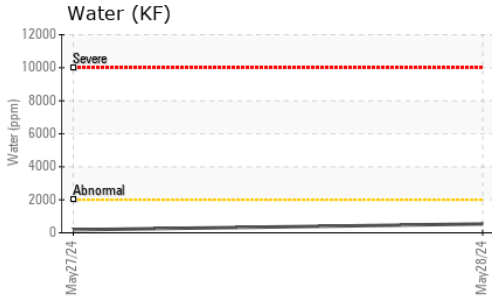






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	54.85	49.4	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

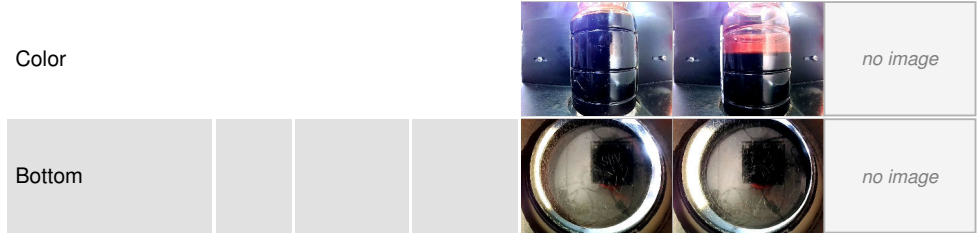

## GRAPHS

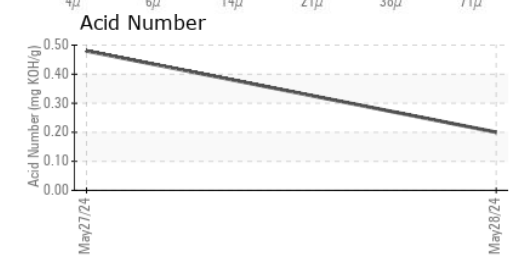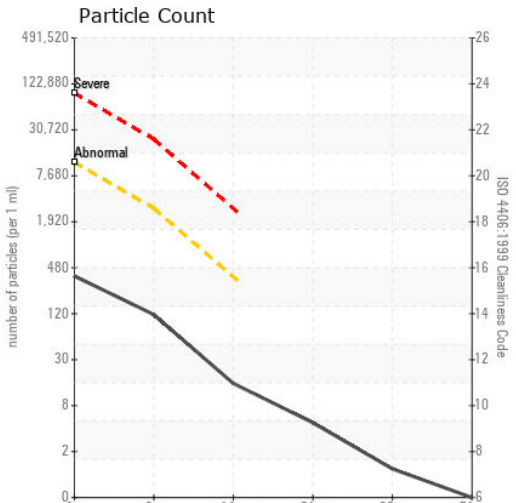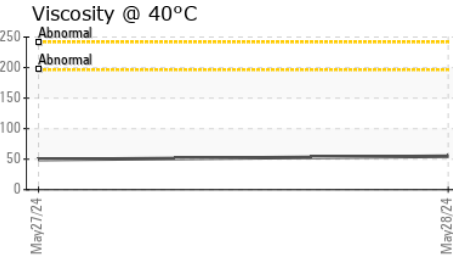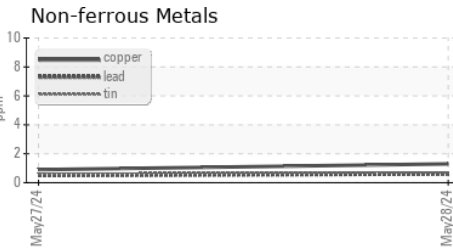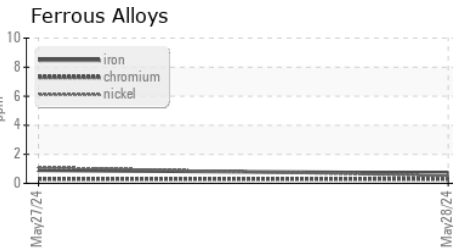

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : USPM36318  
 Lab Number : 06194625  
 Unique Number : 11056748  
 Test Package : IND 2

Received : 29 May 2024  
 Tested : 03 Jun 2024  
 Diagnosed : 03 Jun 2024 - Jonathan Hester

CARGILL FEED & NUTRITION - STOCKTON  
 4344 S EL DORADO ST  
 STOCKTON, CA  
 US 95201  
 Contact: Matt Sadler  
 matthew\_sadler@cargill.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)