




# OIL ANALYSIS REPORT



Machine Id  
**MACK R-5**  
 Component  
**Diesel Engine**  
 Fluid  
**10W30 DURON SEMI (--- QTS)**

Sample Rating Trend

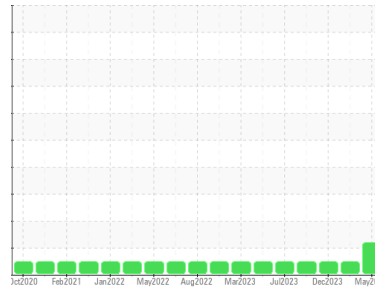

VISUAL METAL



## DIAGNOSIS

### Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

Moderate concentration of visible metal present. All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>LP0001316</b>	LP0001472	LP0001149
Sample Date	Client Info		<b>20 May 2024</b>	18 Mar 2024	04 Dec 2023
Machine Age	hrs	Client Info	<b>21413</b>	20953	20354
Oil Age	hrs	Client Info	<b>460</b>	600	425
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>ABNORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>8</b>	12	6
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	0	<1
Nickel	ppm	ASTM D5185m >5	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>3</b>	5	5
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m >330	<b>3</b>	3	3
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>4</b>	5	7
Barium	ppm	ASTM D5185m	<b>1</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>58</b>	63	58
Manganese	ppm	ASTM D5185m	<b>0</b>	0	<1
Magnesium	ppm	ASTM D5185m	<b>877</b>	1015	918
Calcium	ppm	ASTM D5185m	<b>1100</b>	1184	1027
Phosphorus	ppm	ASTM D5185m	<b>1080</b>	1120	1017
Zinc	ppm	ASTM D5185m	<b>1218</b>	1324	1235
Sulfur	ppm	ASTM D5185m	<b>3190</b>	3758	3035

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>4</b>	4	4
Sodium	ppm	ASTM D5185m	<b>5</b>	6	7
Potassium	ppm	ASTM D5185m >20	<b>6</b>	8	10

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>0.3</b>	0.3	0.4
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.6</b>	8.2	8.0
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>18.6</b>	18.7	18.7


## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>14.7</b>	15.1	15.1
Base Number (BN)	mg KOH/g	ASTM D2896	<b>9.24</b>	9.86	9.21




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

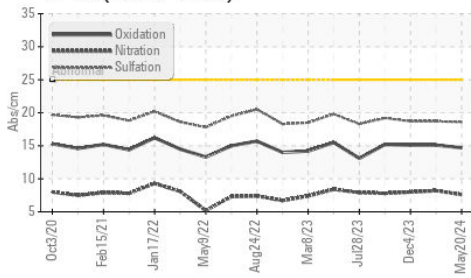

Base Number

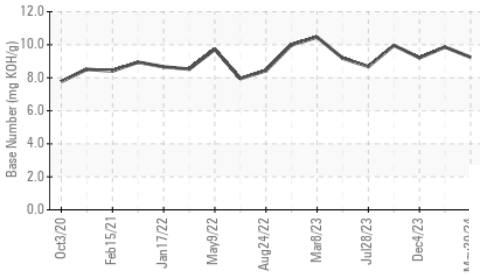









Viscosity @ 100°C

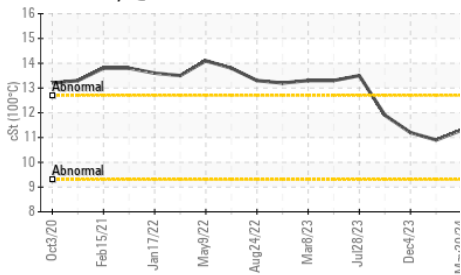

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	▲ MODER	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	11.3	10.9	11.2

## GRAPHS

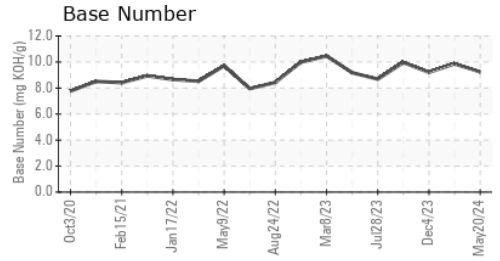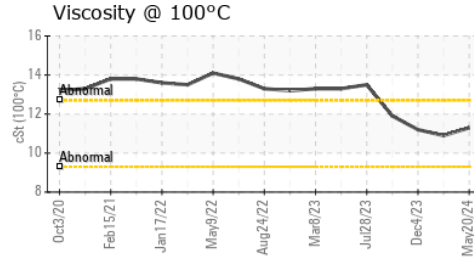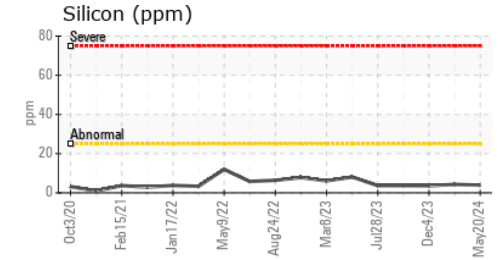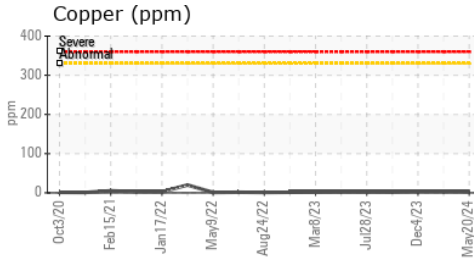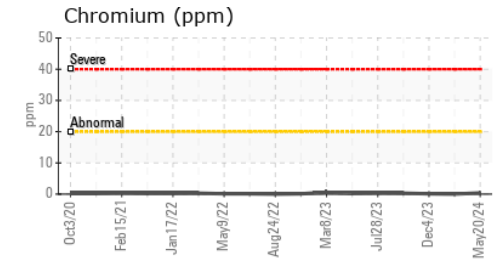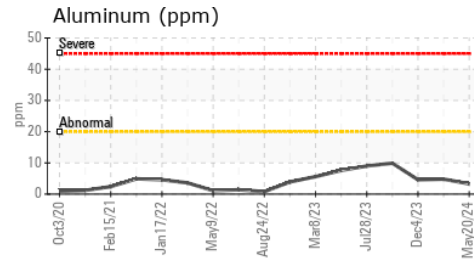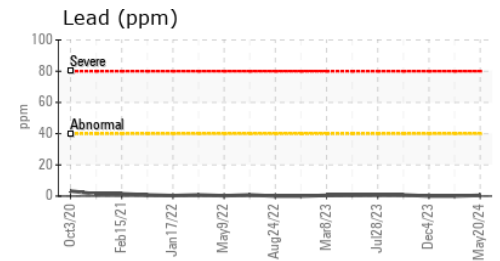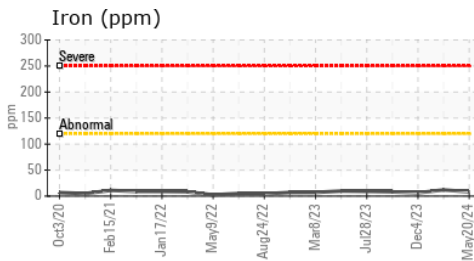

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : LP0001316

Lab Number : 06194692

Unique Number : 11056815

Test Package : MOB 2

Received : 29 May 2024

Tested : 31 May 2024

Diagnosed : 31 May 2024 - Don Baldrige

SELECT DEMO

40 LOWELL RD

SALEM, NH

US 03079

Contact: STAN DOGIL

SDOGIL@SELECTDEMOSERVICES.COM

T: (603)401-0147

F: (603)458-7389

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)