


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

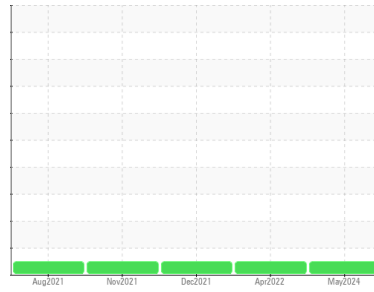

Machine Id
VOLVO A40G 341113
 Component
Diesel Engine
 Fluid
VOLVO ULTRA DIESEL ENGINE OIL 15W40 VDS-3 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			ML0001618	VCP362099	VCE215944
Sample Date	Client Info			24 May 2024	19 Apr 2022	22 Dec 2021
Machine Age	hrs	Client Info		9902	6473	5593
Oil Age	hrs	Client Info		500	0	500
Oil Changed	Client Info			Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.2	NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	10	12	17
Chromium	ppm	ASTM D5185m	>20	<1	<1	1
Nickel	ppm	ASTM D5185m	>10	0	<1	2
Titanium	ppm	ASTM D5185m		<1	6	21
Silver	ppm	ASTM D5185m	>2	<1	0	0
Aluminum	ppm	ASTM D5185m	>30	2	2	3
Lead	ppm	ASTM D5185m	>40	3	2	4
Copper	ppm	ASTM D5185m	>20	<1	<1	<1
Tin	ppm	ASTM D5185m	>20	1	<1	2
Antimony	ppm	ASTM D5185m		---	---	0
Vanadium	ppm	ASTM D5185m		<1	0	<1
Cadmium	ppm	ASTM D5185m		<1	<1	0





ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2.5	36	62	89
Barium	ppm	ASTM D5185m	0.0	0	0	0
Molybdenum	ppm	ASTM D5185m	0.7	46	36	42
Manganese	ppm	ASTM D5185m	0.0	<1	<1	<1
Magnesium	ppm	ASTM D5185m	256	581	561	663
Calcium	ppm	ASTM D5185m	2057	2060	1842	2127
Phosphorus	ppm	ASTM D5185m	935	1107	1005	1184
Zinc	ppm	ASTM D5185m	1223	1256	1158	1364
Sulfur	ppm	ASTM D5185m	4079	3804	2686	3125

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	5	6	7
Sodium	ppm	ASTM D5185m		3	5	3
Potassium	ppm	ASTM D5185m	>20	2	0	2
Fuel	%	ASTM D3524	>3.0	1.6	<1.0	<1.0

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.3	0.3	0.4
Nitration	Abs/cm	*ASTM D7624	>20	10.1	10.4	12.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	24.4	24.7	28.6

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	23.2	22.8	26.9
Base Number (BN)	mg KOH/g	ASTM D2896	10	9.0	9.3	8.2





OIL ANALYSIS REPORT

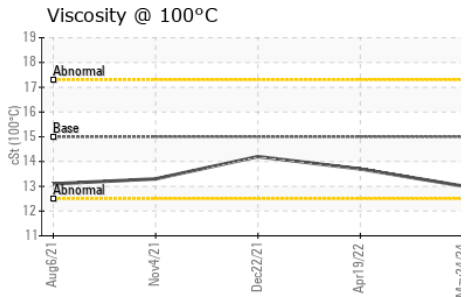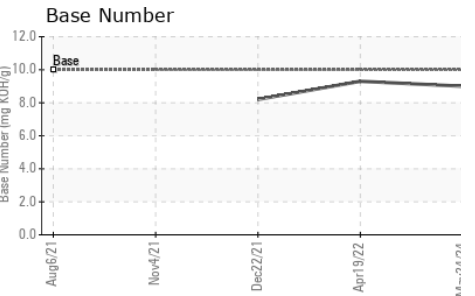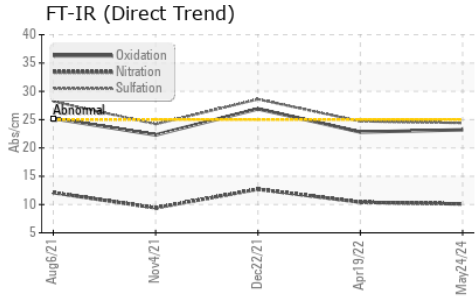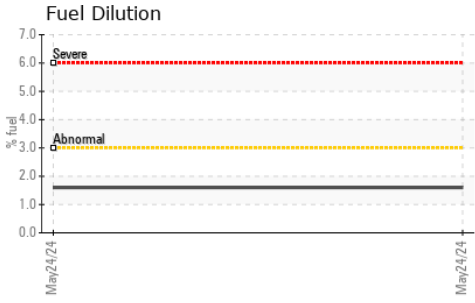

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.0	13.01	13.7	14.2

GRAPHS

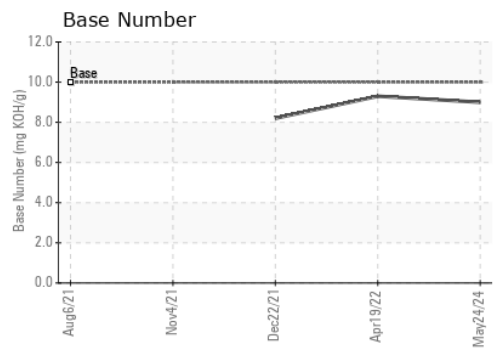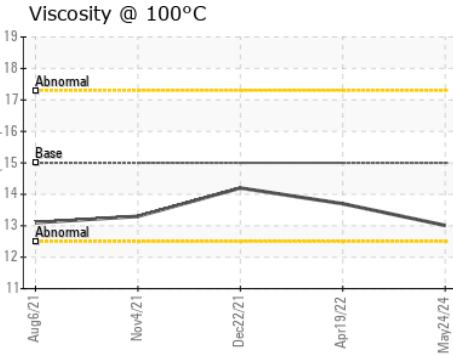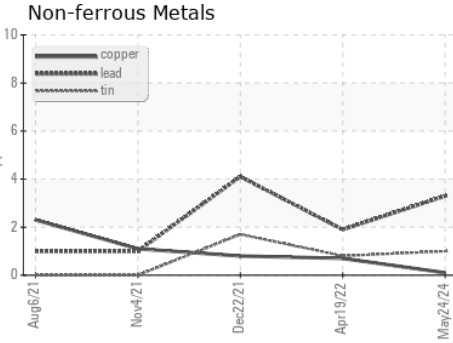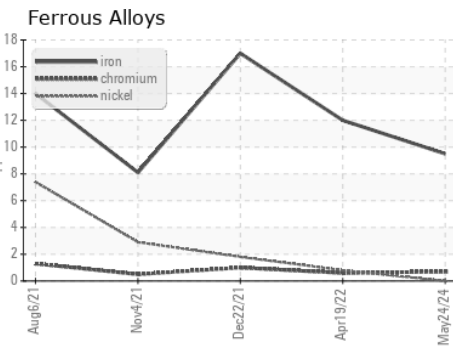

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ML0001618 **Received** : 30 May 2024
Lab Number : **06195102** **Tested** : 04 Jun 2024
Unique Number : 11057225 **Diagnosed** : 04 Jun 2024 - Jonathan Hester
Test Package : CONST (Additional Tests: FuelDilution, PercentFuel, TBN)

MCCLUNG-LOGAN EQUIPMENT CO - SALEM
 2025 COOK DRIVE
 SALEM, VA
 US 24153
 Contact: SCOTT CARR
 scarr@mcclung-logan.com
 T: (540)418-5218
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)