




# OIL ANALYSIS REPORT

## Sample Rating Trend

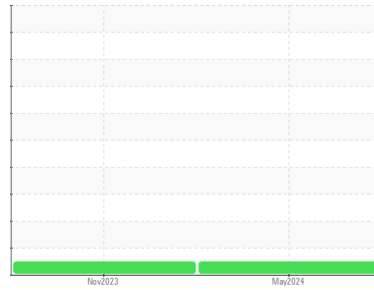

**NORMAL**



Machine Id

**MOLDER 31 (S/N 202115036025935)**

Component

**Hydraulic System**

Fluid

**DYNOFLO AW 46 (35 GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0937988</b>	WC0848544	---
Sample Date	Client Info			<b>21 May 2024</b>	10 Nov 2023	---
Machine Age	hrs	Client Info		<b>51210</b>	1055	---
Oil Age	hrs	Client Info		<b>0</b>	1055	---
Oil Changed	Client Info			<b>N/A</b>	Not Changd	---
Sample Status				<b>NORMAL</b>	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.05	<b>NEG</b>	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	---
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	---
Nickel	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Silver	ppm	ASTM D5185m		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>20	<b>2</b>	0	---
Lead	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	---
Copper	ppm	ASTM D5185m	>20	<b>2</b>	1	---
Tin	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>0</b>	0	---
Barium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Molybdenum	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Manganese	ppm	ASTM D5185m		<b>0</b>	0	---
Magnesium	ppm	ASTM D5185m		<b>2</b>	0	---
Calcium	ppm	ASTM D5185m		<b>41</b>	37	---
Phosphorus	ppm	ASTM D5185m		<b>330</b>	389	---
Zinc	ppm	ASTM D5185m		<b>562</b>	529	---
Sulfur	ppm	ASTM D5185m		<b>1322</b>	994	---





CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<b>5</b>	2	---
Sodium	ppm	ASTM D5185m		<b>0</b>	1	---
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	0	---

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	<b>3103</b>	4181	---
Particles >6µm		ASTM D7647	>1300	<b>250</b>	736	---
Particles >14µm		ASTM D7647	>160	<b>8</b>	37	---
Particles >21µm		ASTM D7647	>40	<b>3</b>	9	---
Particles >38µm		ASTM D7647	>10	<b>0</b>	0	---
Particles >71µm		ASTM D7647	>3	<b>0</b>	0	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	<b>19/15/10</b>	19/17/12	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>0.58</b>	0.47	---




# OIL ANALYSIS REPORT

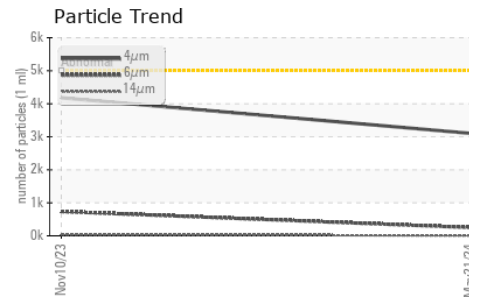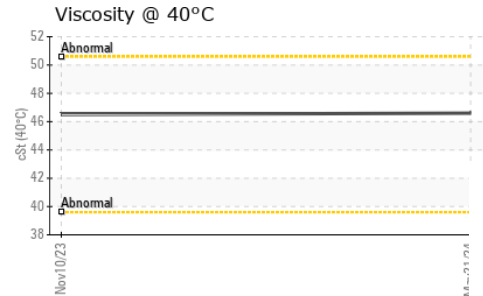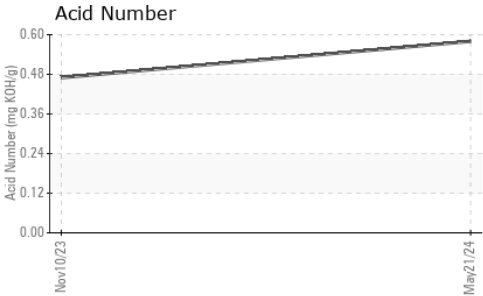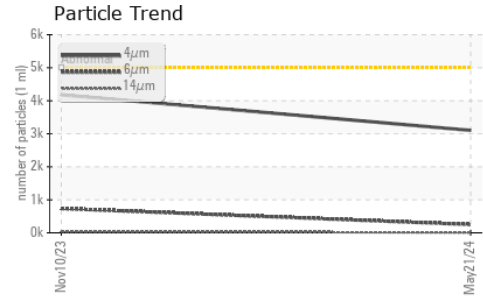






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	<b>46.6</b>	46.5	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

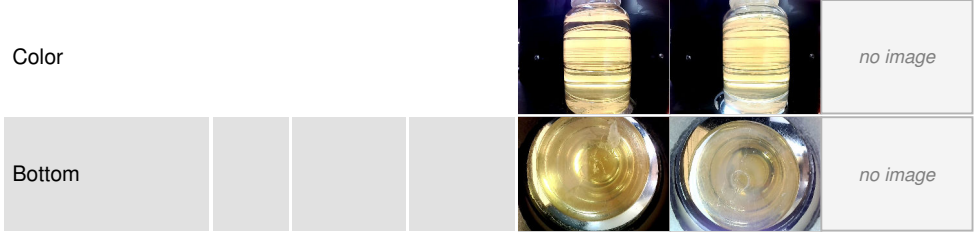

### GRAPHS

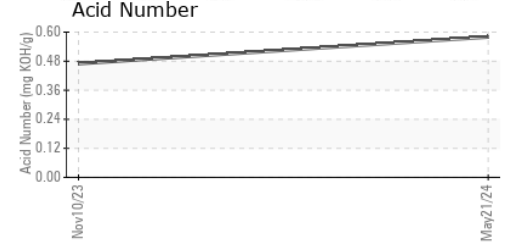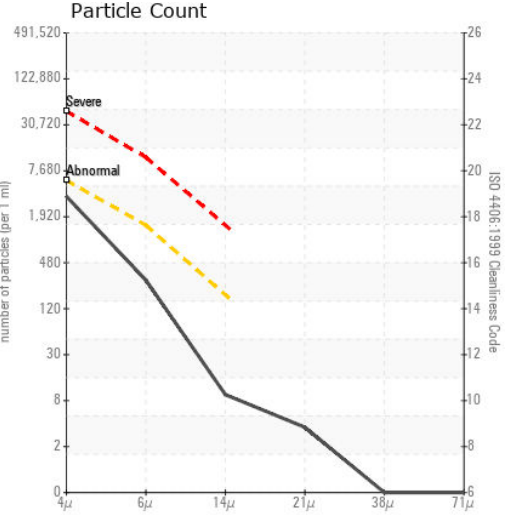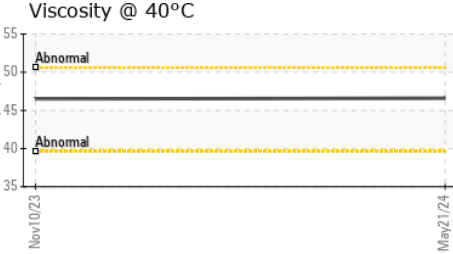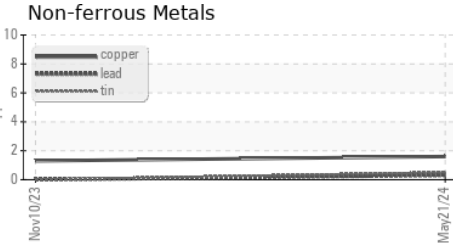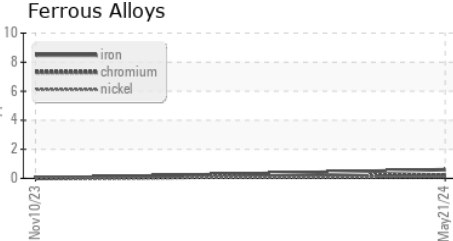

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0937988      **Received** : 30 May 2024  
**Lab Number** : **06195389**      **Tested** : 31 May 2024  
**Unique Number** : 11057512      **Diagnosed** : 31 May 2024 - Wes Davis  
**Test Package** : IND 2

**ACTION INDUSTRIAL SUPPLY - HICKORY**  
 545 20TH STREET SE  
 HICKORY, NC  
 US 28602  
 Contact: JODIE LAFONE  
 jodie@actionindsupply.com  
 T: (704)878-9991  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)