




# OIL ANALYSIS REPORT

Sample Rating Trend

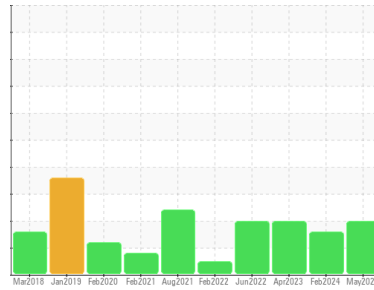

ISO



Machine Id

**KAESER SM10 5009061 (S/N 1717)**

Component

**Compressor**

Fluid

**KAESER SIGMA (OEM) M-460 (--- GAL)**

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a high amount of particulates present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>KCPA017753</b>	KCPA015135	KCPA001409
Sample Date	Client Info		<b>09 May 2024</b>	12 Feb 2024	04 Apr 2023
Machine Age	hrs	Client Info	<b>39568</b>	37488	35941
Oil Age	hrs	Client Info	<b>2066</b>	1547	0
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>ABNORMAL</b>	ABNORMAL	ABNORMAL

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	<b>0</b>	0	<1
Chromium	ppm	ASTM D5185m >10	<b>&lt;1</b>	0	0
Nickel	ppm	ASTM D5185m >3	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m >3	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >10	<b>2</b>	<1	<1
Lead	ppm	ASTM D5185m >10	<b>&lt;1</b>	2	0
Copper	ppm	ASTM D5185m >50	<b>8</b>	8	16
Tin	ppm	ASTM D5185m >10	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>0</b>	0	0
Barium	ppm	ASTM D5185m 90	<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185m 0	<b>&lt;1</b>	0	0
Manganese	ppm	ASTM D5185m	<b>0</b>	0	<1
Magnesium	ppm	ASTM D5185m 100	<b>7</b>	9	7
Calcium	ppm	ASTM D5185m 0	<b>&lt;1</b>	0	0
Phosphorus	ppm	ASTM D5185m 0	<b>2</b>	0	6
Zinc	ppm	ASTM D5185m 0	<b>3</b>	27	81
Sulfur	ppm	ASTM D5185m 23500	<b>12817</b>	18300	24428

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>&lt;1</b>	0	<1
Sodium	ppm	ASTM D5185m	<b>3</b>	4	2
Potassium	ppm	ASTM D5185m >20	<b>2</b>	<1	<1
Water	%	ASTM D6304 >0.05	<b>0.018</b>	0.008	0.009
ppm Water	ppm	ASTM D6304 >500	<b>185</b>	85	99.4






## FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		<b>20425</b>	25241	43986
Particles >6µm	ASTM D7647	>1300	<b>▲ 6495</b>	▲ 8864	▲ 18994
Particles >14µm	ASTM D7647	>80	<b>▲ 502</b>	▲ 554	▲ 1899
Particles >21µm	ASTM D7647	>20	<b>▲ 151</b>	▲ 104	▲ 345
Particles >38µm	ASTM D7647	>4	<b>● 8</b>	2	▲ 15
Particles >71µm	ASTM D7647	>3	<b>0</b>	0	0
Oil Cleanliness	ISO 4406 (c)	>--/17/13	<b>▲ 22/20/16</b>	▲ 22/20/16	▲ 23/21/18

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 1.0	<b>0.37</b>	0.36	0.40


# OIL ANALYSIS REPORT

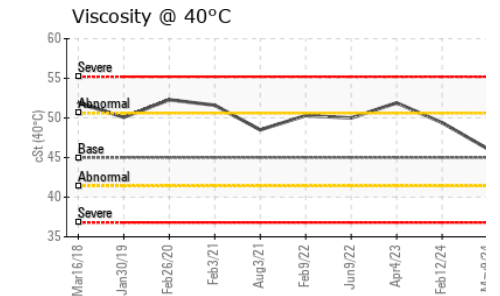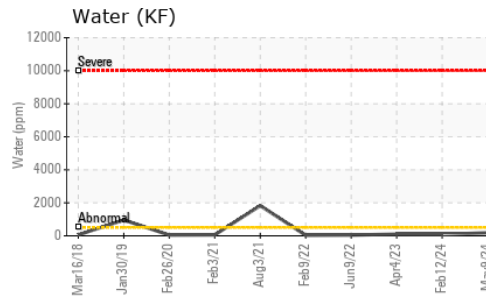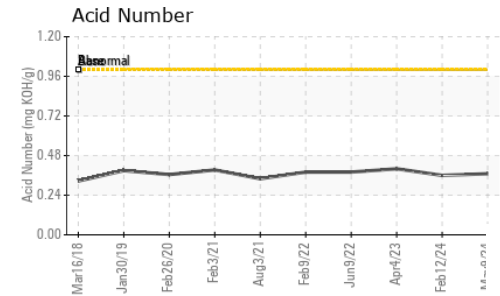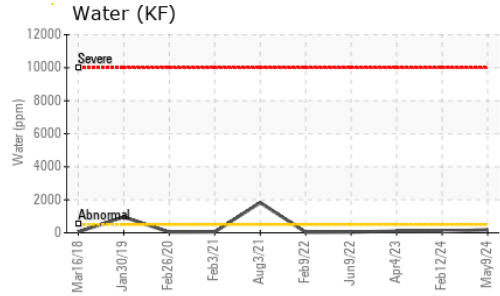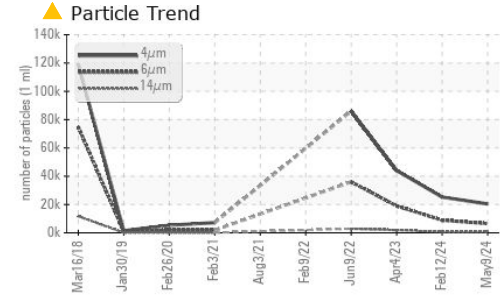





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 45	46.1	49.4	51.9

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

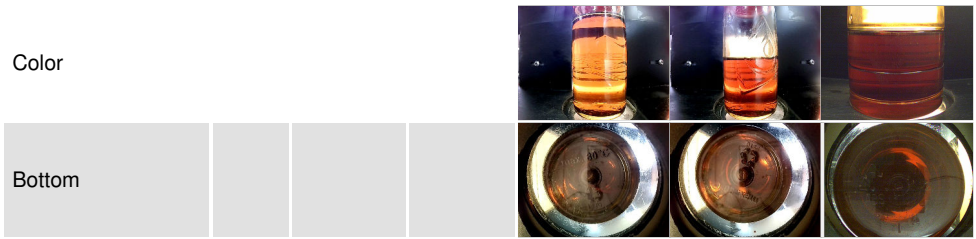

## GRAPHS

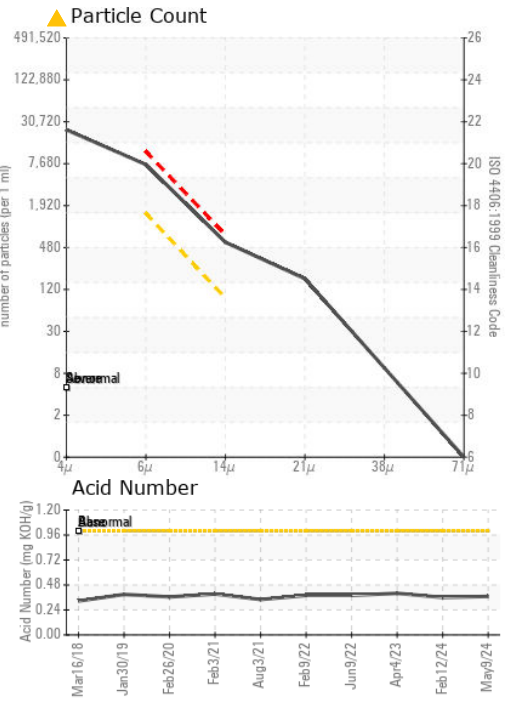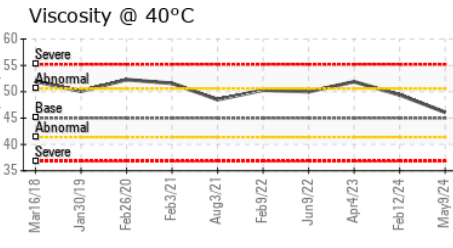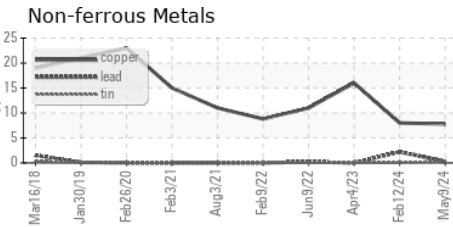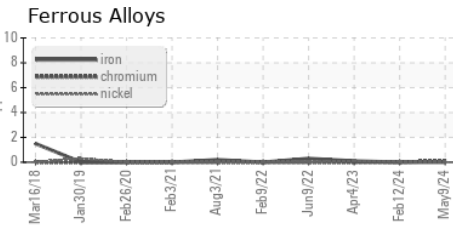

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KCPA017753  
**Lab Number** : 06195443  
**Unique Number** : 11057566  
**Test Package** : IND 2 ( Additional Tests: KF, PrtCount )

**Received** : 30 May 2024  
**Tested** : 31 May 2024  
**Diagnosed** : 31 May 2024 - Angela Borella

**CARMAX**  
 12715 LYNDON B JOHNSON FWY  
 GARLAND, TX  
 US 75041  
 Contact: SERVICE MANAGER

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)