


Mameno

P5013

OIL ANALYSIS REPORT

HIGH PERFORMANCE LUBRICANTS HYDRAULIC LIFE 46 (30 GAL)

Sample Rating Trend

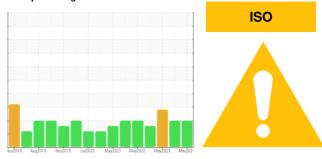

DIAGNOSIS

Area

Recommendation

Hydraulic System

The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. We recommend you service the filters on this component. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.


Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0941396	WC0850027	WC0804692
Sample Date		Client Info		24 May 2024	30 Nov 2023	26 May 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	<1	0	3
Chromium	ppm	ASTM D5185m		<1	0	0
Nickel	ppm	ASTM D5185m	>10	0	0	0
Titanium	ppm	ASTM D5185m	>10	<1	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum		ASTM D5185m	>10	2	0	0
	ppm		>10	2 <1	0	<1
Lead	ppm	ASTM D5185m		2		
Copper	ppm	ASTM D5185m			0	4 3
Tin	ppm	ASTM D5185m	>10	<1	0	5
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		<1	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		<1	0	0
Molybdenum	ppm	ASTM D5185m		<1	0	<1
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m		2	2	2
Calcium	ppm	ASTM D5185m		68	69	71
Phosphorus	ppm	ASTM D5185m		378	332	327
Zinc	ppm	ASTM D5185m		454	422	413
Sulfur	ppm	ASTM D5185m		14533	11159	12641
CONTAMINANTS	6	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	2	<1	2
Sodium	ppm	ASTM D5185m		0	0	0
Potassium	ppm	ASTM D5185m	>20	1	0	1
Water	%	ASTM D6304	>0.1	0.002	0.010	0.002
ppm Water	ppm	ASTM D6304	>1000	25	101	23.5
FLUID CLEANLIN	NESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>320	1622	2 448	1 353
Particles >6µm		ASTM D7647	>80	<u> </u>	4 01	6 18
Particles >14µm		ASTM D7647	>10	A 31	A 28	A 73
Particles >21µm		ASTM D7647	>3	<u> </u>	<u> </u>	a 25
Particles >38µm		ASTM D7647	>3	1	1	1
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>15/13/10	18/16/12	▲ 18/16/12	▲ 18/16/13
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.37	0.39	0.39
	5 0					





OIL ANALYSIS REPORT

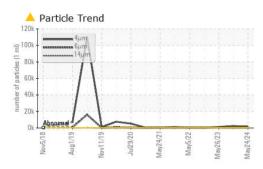


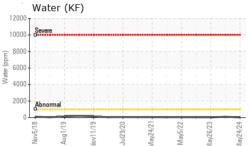









Certificate L2367 To discuss

(18-5).

White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	45.0	44.8	44.9
SAMPLE IMAGES	6	method	limit/base	current	history1	history2
Color						

limit/base

current

method

Coloi


VISUAL



history1

history2

Bottom

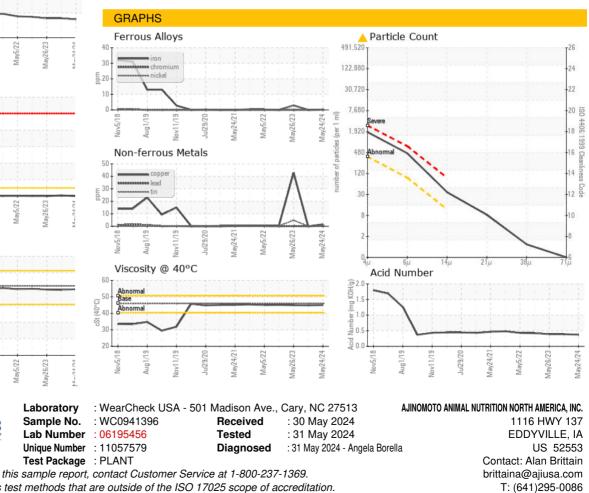

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Submitted By: Alan Brittain

E: