

## **OIL ANALYSIS REPORT**

## Machine Id BUSCH TYSWALWAS VAC 2A (S/N U131500019) Component Pump

Fluid USPI VAC 100 (--- GAL)

#### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

## Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

	m2017 Nov2017 Sup2018 Aug2019 Jun2020 Apr2022 Jun2022 Jun2023 Dec2023								
SAMPLE INFORM	IATION	method	limit/base	current	history1	history2			
Sample Number		Client Info		USPM36360	USPM31855	USPM29085			
Sample Date		Client Info		29 May 2024	12 Dec 2023	01 Aug 2023			
Machine Age	hrs	Client Info		0	0	0			
Oil Age	hrs	Client Info		0	0	0			
Oil Changed		Client Info		N/A	N/A	N/A			
Sample Status				ATTENTION	ABNORMAL	ABNORMAL			
WEAR METALS		method	limit/base	current	history1	history2			
Iron	ppm	ASTM D5185m	>90	<1	<1	1			
Chromium	ppm	ASTM D5185m	>5	<1	0	0			
Nickel	ppm	ASTM D5185m	>5	0	0	0			
Titanium	ppm	ASTM D5185m	>3	<1	0	0			
Silver	ppm	ASTM D5185m	>3	0	0	0			
Aluminum	ppm	ASTM D5185m	>7	0	0	<1			
Lead	ppm	ASTM D5185m	>12	<1	0	0			
Copper	ppm	ASTM D5185m	>30	<1	<1	0			
Tin	ppm	ASTM D5185m	>9	<1	1	<1			
Vanadium	ppm	ASTM D5185m		<1	<1	<1			
Cadmium	ppm	ASTM D5185m		<1	0	0			
ADDITIVES		method	limit/base	current	history1	history2			
Boron	ppm	ASTM D5185m	0	0	0	0			
Barium	ppm	ASTM D5185m	0	<1	0	0			
Molybdenum	ppm	ASTM D5185m	0	<1	0	0			
Manganese	ppm	ASTM D5185m		0	0	<1			
Magnesium	ppm	ASTM D5185m	0	0	0	0			
Calcium	ppm	ASTM D5185m	0	0	0	0			
Phosphorus	ppm	ASTM D5185m	1800	1879	1370	1414			
Zinc	ppm	ASTM D5185m	0	0	0	0			
Sulfur	ppm	ASTM D5185m	0	0	29	0			
CONTAMINANTS		method	limit/base	current	history1	history2			
Silicon	ppm	ASTM D5185m	>60	7	7	6			
Sodium	ppm	ASTM D5185m		<1	<1	0			
Potassium	ppm	ASTM D5185m	>20	1	<1	1			
Water	%	ASTM D6304	>.1	0.052	0.020	0.040			
ppm Water	ppm	ASTM D6304	>1000	523	201	400.6			
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2			
Particles >4µm		ASTM D7647	>5000	<mark> </mark> 7852	<b>1</b> 1688	<mark>▲</mark> 32365			
Particles >6µm		ASTM D7647	>1300	<mark> </mark> 1369	<u> </u>	<mark>▲</mark> 5831			
Particles >14µm		ASTM D7647	>160	31	69	70			
Particles >21µm		ASTM D7647		8	12	17			
Particles >38µm		ASTM D7647	>10	0	1	7			
Particles >71µm		ASTM D7647		0	0	<u> </u>			
Oil Cleanliness		ISO 4406 (c)	>19/17/14	<b>e</b> 20/18/12	<b>1</b> /19/13	A 22/20/13			
FLUID DEGRADA	TION	method	limit/base	current	history1	history2			
Acid Number (AN)	mg KOH/g	ASTM D8045	0.05	0.078	0.074	0.048			


Sample Rating Trend


ISO


Contact/Location: RICK DUVALL - TYSWAL Page 1 of 2



# **OIL ANALYSIS REPORT**

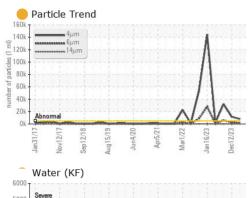



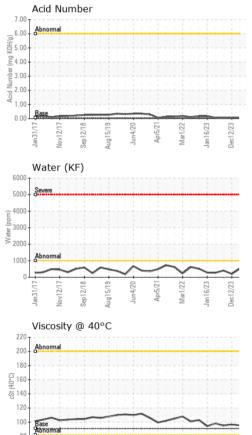


Aug15/19 Sep12/16


8

Vov12/1 an31

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	91	95.4	96.5	95.3
SAMPLE IMAGES		method	limit/base	current	history1	history2
Color						



Bottom

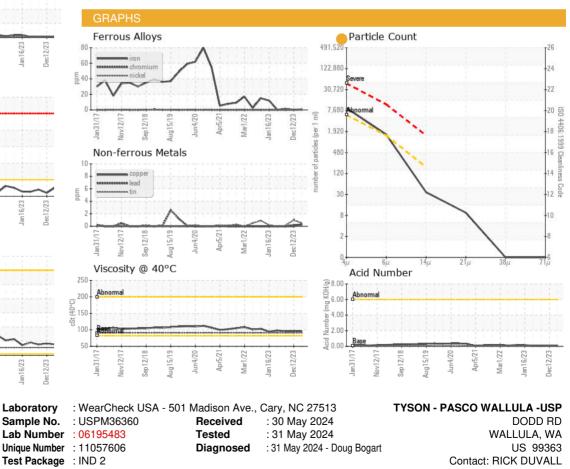

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) T: (402)423-6375 F: (402)423-6661

Report Id: TYSWAL [WUSCAR] 06195483 (Generated: 05/31/2024 20:32:05) Rev: 1

Certificate 12367

Contact/Location: RICK DUVALL - TYSWAL

Page 2 of 2