

## **OIL ANALYSIS REPORT**

## Area [85809131] NOT GIVEN WC0814565 - 85809131 (S/N NO INFO GIVEN) Component

Gearbox Fluid

{not provided} (--- GAL)

### DIAGNOSIS

#### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

#### Wear


All component wear rates are normal.

#### Contamination

Moderate concentration of visible dirt/debris present in the oil. Elemental level of silicon (Si) above normal indicating ingress of dirt/seal material.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0814565		
Sample Date		Client Info		30 May 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
CONTAMINATION	N	method	limit/base	current	history1	history2
Water		WC Method	>0.2	NEG		
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184		16		
Iron	ppm	ASTM D5185m	>200	8		
Chromium	ppm	ASTM D5185m	>15	0		
Nickel	ppm	ASTM D5185m	>15	0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>25	0		
Lead	ppm	ASTM D5185m	>100	0		
Copper	ppm	ASTM D5185m	>200	2		
Tin	ppm	ASTM D5185m	>25	<1		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m		<1		
Calcium	ppm	ASTM D5185m		0		
Phosphorus	ppm	ASTM D5185m		266		
Zinc	ppm	ASTM D5185m		13		
Sulfur	ppm	ASTM D5185m		2010		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	<b>/</b> 70		
Sodium	ppm	ASTM D5185m		0		
Potassium	ppm	ASTM D5185m	>20	0		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.82		
	ing roning	, 10 HM D0040		0.02		



Silicon (ppm)

Acid Number

140 120

100

80

4(

20

0

@0

2°0.6

đ.

Pio 0.2 0.0

250

24

€ £220

200 Abnorma

190

20

150 0

50

讈


Mav30/2

PQ

Abnorm 100

ŝ 210 Abno

# **OIL ANALYSIS REPORT**

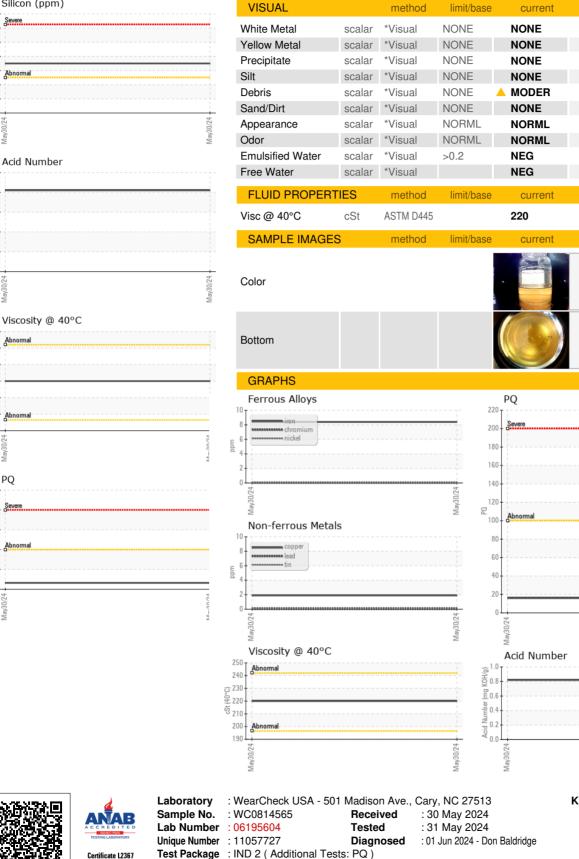

**KELLOGGS-BATTLE CREEK 425 PORTER STREET** BATTLE CREEK, MI US 49016 Contact: JEFF VONDELL jeff.vondell@kellogg.com T: (269)961-6889 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) F: (269)961-3096

Report Id: KELBAT [WUSCAR] 06195604 (Generated: 06/01/2024 11:19:02) Rev: 1

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Contact/Location: JEFF VONDELL ? - KELBAT

history1

history

history1

no image

no image

history2

history

history2

no image

no image