




OIL ANALYSIS REPORT

Sample Rating Trend

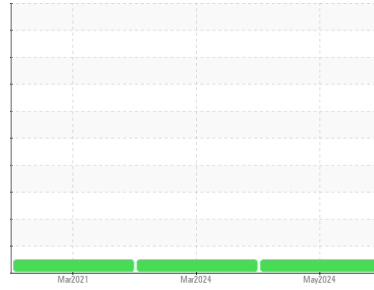

NORMAL



Machine Id
JOHN DEERE 310L 1T0310LXLJF340157
 Component
Transmission (Manual)
 Fluid
JOHN DEERE HY-GARD HYD/TRANS (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the fluid.

Fluid Condition

The condition of the fluid is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		JR0212120	JR0199888	JR0076912
Sample Date	Client Info		29 May 2024	07 Mar 2024	09 Mar 2021
Machine Age	hrs	Client Info	3246	3809	1680
Oil Age	hrs	Client Info	0	0	1680
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
PQ	ASTM D8184	>95	22	21	16	
Iron	ppm	ASTM D5185m	>200	38	29	30
Chromium	ppm	ASTM D5185m	>5	0	<1	0
Nickel	ppm	ASTM D5185m	>5	0	0	0
Titanium	ppm	ASTM D5185m		0	<1	<1
Silver	ppm	ASTM D5185m	>7	0	0	0
Aluminum	ppm	ASTM D5185m	>25	7	9	8
Lead	ppm	ASTM D5185m	>45	0	0	2
Copper	ppm	ASTM D5185m	>225	28	31	20
Tin	ppm	ASTM D5185m	>10	<1	<1	0
Antimony	ppm	ASTM D5185m		---	---	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0


ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	6	6	10	18
Barium	ppm	ASTM D5185m	0	<1	<1	0
Molybdenum	ppm	ASTM D5185m	0	0	3	0
Manganese	ppm	ASTM D5185m		2	1	2
Magnesium	ppm	ASTM D5185m	145	100	93	84
Calcium	ppm	ASTM D5185m	3570	3632	3327	3809
Phosphorus	ppm	ASTM D5185m	1290	1131	1041	1082
Zinc	ppm	ASTM D5185m	1640	1334	1218	1365
Sulfur	ppm	ASTM D5185m		4206	3758	3069

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>125	4	4	5
Sodium	ppm	ASTM D5185m		2	<1	4
Potassium	ppm	ASTM D5185m	>20	0	2	0

OIL ANALYSIS REPORT

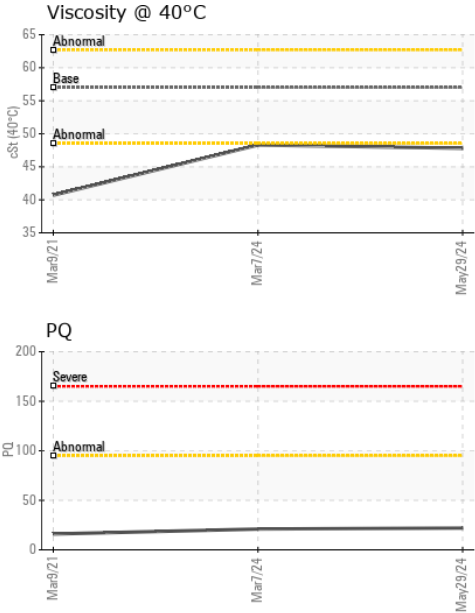





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	57.0	47.8	48.3	40.7

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image	no image
Bottom				no image	no image	no image

GRAPHS

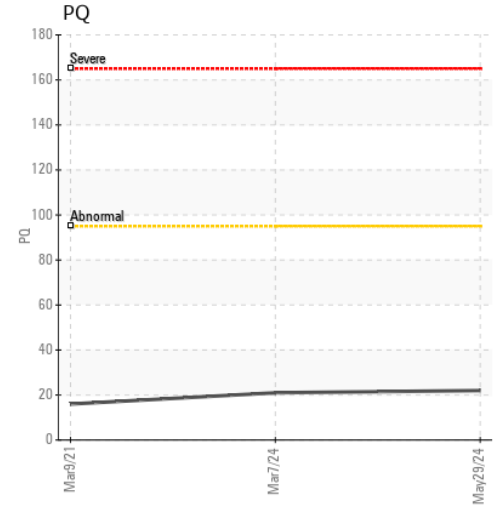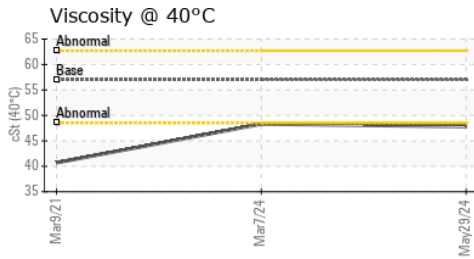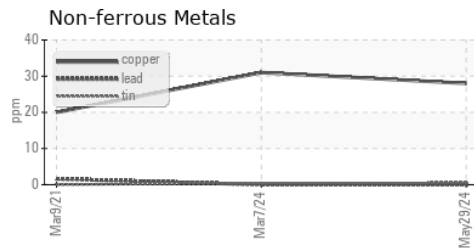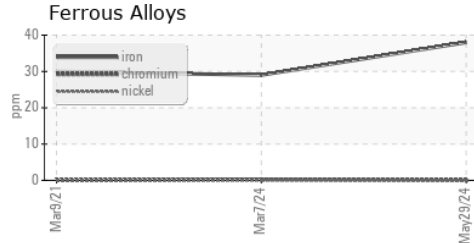

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0212120 **Received** : 30 May 2024
Lab Number : **06195641** **Tested** : 31 May 2024
Unique Number : 11057764 **Diagnosed** : 31 May 2024 - Wes Davis
Test Package : CONST (Additional Tests: PQ)

JRE - ASHLAND
 11047 LEADBETTER RD
 ASHLAND, VA
 US 23005
 Contact: DAVID ZIEG
 dzieg@jamesriverequipment.com
 T: (804)798-6001
 F: (804)798-0292

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)