




# OIL ANALYSIS REPORT

Sample Rating Trend

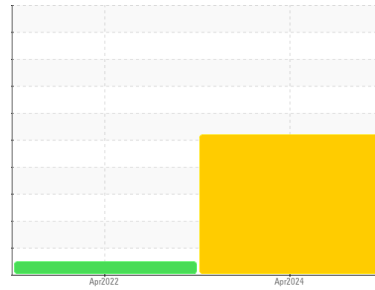

DIRT



Area  
**HOWARD SHEPPARD**  
 Machine Id  
**2562 HOWARD SHEPPARD**  
 Component  
**Front Differential**  
 Fluid  
**{not provided} (--- GAL)**

## DIAGNOSIS

### Recommendation

We advise that you check all areas where dirt can enter the system. We recommend you service the filters on this component if applicable. We recommend an early resample to monitor this condition. Please note that this is a corrected copy for laboratory data updates of elemental data and confirmation of viscosities.

### Wear

Gear wear is indicated.

### Contamination

Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| SAMPLE INFORMATION |             | method      | limit/base | current            | history1    | history2 |
|--------------------|-------------|-------------|------------|--------------------|-------------|----------|
| Sample Number      | Client Info |             |            | <b>WC0934660</b>   | WC0682427   | ---      |
| Sample Date        | Client Info |             |            | <b>12 Apr 2024</b> | 03 Apr 2022 | ---      |
| Machine Age        | mls         | Client Info |            | <b>110619</b>      | 369         | ---      |
| Oil Age            | mls         | Client Info |            | <b>0</b>           | 0           | ---      |
| Oil Changed        | Client Info |             |            | <b>N/A</b>         | N/A         | ---      |
| Sample Status      |             |             |            | <b>ABNORMAL</b>    | NORMAL      | ---      |

| WEAR METALS |     | method      | limit/base | current      | history1 | history2 |
|-------------|-----|-------------|------------|--------------|----------|----------|
| Iron        | ppm | ASTM D5185m | >500       | <b>▲ 499</b> | 2        | ---      |
| Chromium    | ppm | ASTM D5185m | >10        | <b>2</b>     | 0        | ---      |
| Nickel      | ppm | ASTM D5185m | >10        | <b>0</b>     | <1       | ---      |
| Titanium    | ppm | ASTM D5185m |            | <b>&lt;1</b> | 0        | ---      |
| Silver      | ppm | ASTM D5185m |            | <b>0</b>     | <1       | ---      |
| Aluminum    | ppm | ASTM D5185m | >25        | <b>● 6</b>   | <1       | ---      |
| Lead        | ppm | ASTM D5185m | >25        | <b>0</b>     | 0        | ---      |
| Copper      | ppm | ASTM D5185m | >100       | <b>2</b>     | 0        | ---      |
| Tin         | ppm | ASTM D5185m | >10        | <b>0</b>     | <1       | ---      |
| Vanadium    | ppm | ASTM D5185m |            | <b>&lt;1</b> | 0        | ---      |
| Cadmium     | ppm | ASTM D5185m |            | <b>0</b>     | 0        | ---      |

| ADDITIVES  |     | method      | limit/base | current      | history1 | history2 |
|------------|-----|-------------|------------|--------------|----------|----------|
| Boron      | ppm | ASTM D5185m |            | <b>9</b>     | 105      | ---      |
| Barium     | ppm | ASTM D5185m |            | <b>0</b>     | 0        | ---      |
| Molybdenum | ppm | ASTM D5185m |            | <b>0</b>     | 0        | ---      |
| Manganese  | ppm | ASTM D5185m |            | <b>10</b>    | <1       | ---      |
| Magnesium  | ppm | ASTM D5185m |            | <b>1</b>     | 198      | ---      |
| Calcium    | ppm | ASTM D5185m |            | <b>6</b>     | 0        | ---      |
| Phosphorus | ppm | ASTM D5185m |            | <b>532</b>   | 1767     | ---      |
| Zinc       | ppm | ASTM D5185m |            | <b>18</b>    | 0        | ---      |
| Sulfur     | ppm | ASTM D5185m |            | <b>19108</b> | 22862    | ---      |






| CONTAMINANTS |     | method      | limit/base | current      | history1 | history2 |
|--------------|-----|-------------|------------|--------------|----------|----------|
| Silicon      | ppm | ASTM D5185m | >75        | <b>▲ 44</b>  | 1        | ---      |
| Sodium       | ppm | ASTM D5185m |            | <b>4</b>     | 0        | ---      |
| Potassium    | ppm | ASTM D5185m | >20        | <b>&lt;1</b> | 0        | ---      |
| Water        | %   | ASTM D6304  | >.2        | <b>0.014</b> | 0.058    | ---      |
| ppm Water    | ppm | ASTM D6304  | >2000      | <b>146</b>   | 587.6    | ---      |

| FLUID CLEANLINESS |  | method       | limit/base | current           | history1 | history2 |
|-------------------|--|--------------|------------|-------------------|----------|----------|
| Particles >4µm    |  | ASTM D7647   | >20000     | <b>▲ 396901</b>   | ---      | ---      |
| Particles >6µm    |  | ASTM D7647   | >5000      | <b>▲ 331763</b>   | ---      | ---      |
| Particles >14µm   |  | ASTM D7647   | >640       | <b>▲ 71891</b>    | ---      | ---      |
| Particles >21µm   |  | ASTM D7647   | >160       | <b>▲ 5587</b>     | ---      | ---      |
| Particles >38µm   |  | ASTM D7647   | >40        | <b>12</b>         | ---      | ---      |
| Particles >71µm   |  | ASTM D7647   | >10        | <b>0</b>          | ---      | ---      |
| Oil Cleanliness   |  | ISO 4406 (c) | >21/19/16  | <b>▲ 26/26/23</b> | ---      | ---      |

| FLUID DEGRADATION |          | method     | limit/base | current     | history1 | history2 |
|-------------------|----------|------------|------------|-------------|----------|----------|
| Acid Number (AN)  | mg KOH/g | ASTM D8045 |            | <b>0.96</b> | 0.77     | ---      |




# OIL ANALYSIS REPORT

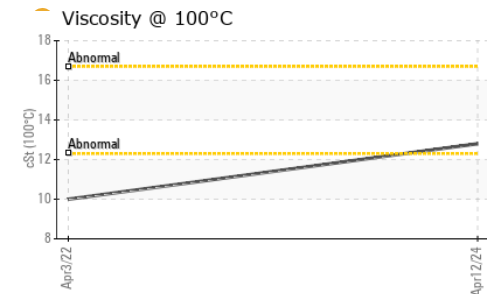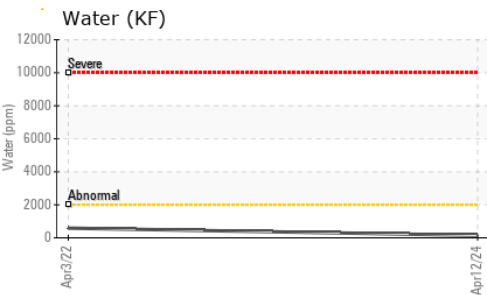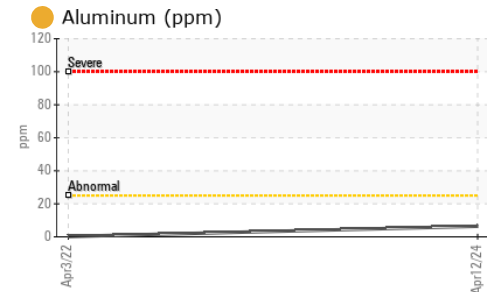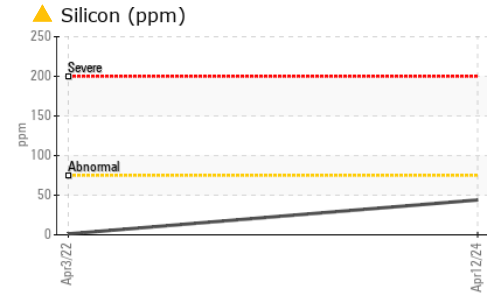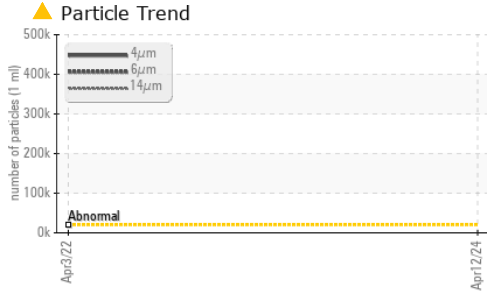





| VISUAL           | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | ---      |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | ---      |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | ---      |
| Silt             | scalar | *Visual    | NONE    | NONE     | ---      |
| Debris           | scalar | *Visual    | NONE    | NONE     | ---      |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | ---      |
| Appearance       | scalar | *Visual    | NORML   | NORML    | ---      |
| Odor             | scalar | *Visual    | NORML   | NORML    | ---      |
| Emulsified Water | scalar | *Visual    | >.2     | NEG      | ---      |
| Free Water       | scalar | *Visual    |         | NEG      | ---      |

| FLUID PROPERTIES     | method | limit/base | current | history1 | history2 |
|----------------------|--------|------------|---------|----------|----------|
| Visc @ 40°C          | cSt    | ASTM D445  | 85.1    | 89       | ---      |
| Visc @ 100°C         | cSt    | ASTM D445  | 12.8    | 10.0     | ---      |
| Viscosity Index (VI) | Scale  | ASTM D2270 | 149     | 90       | ---      |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|

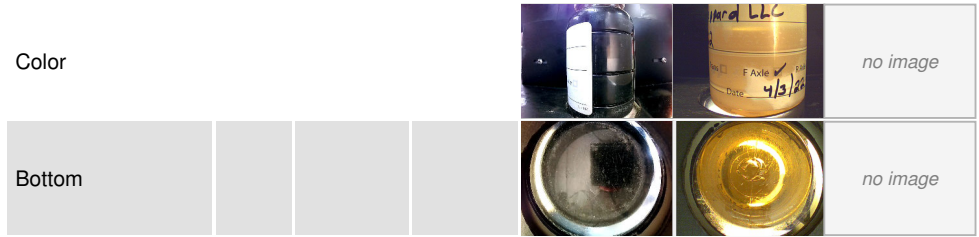

## GRAPHS

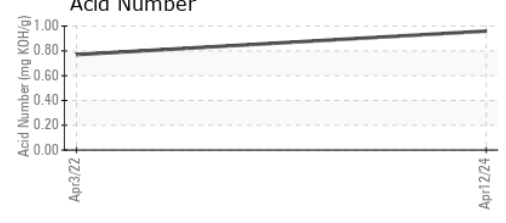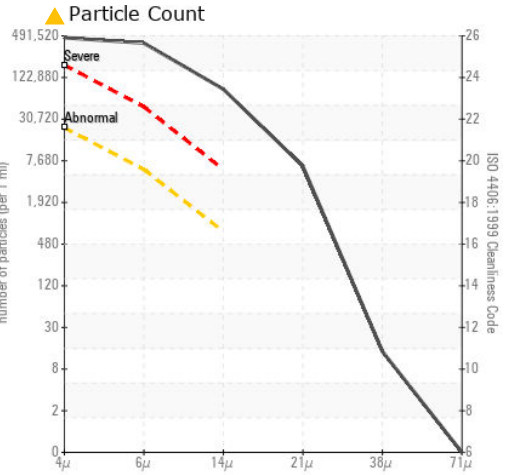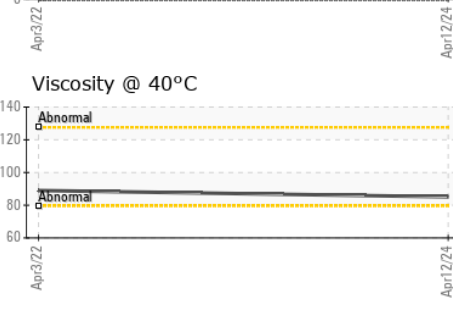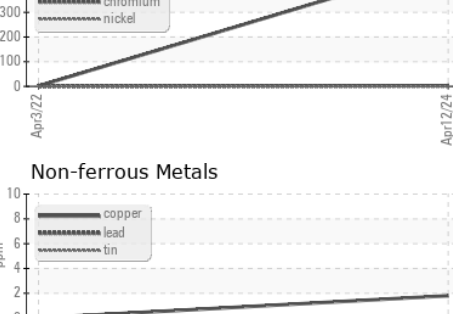

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0934660 **Received** : 30 May 2024  
**Lab Number** : 06195908 **Tested** : 13 Jun 2024  
**Unique Number** : 11058031 **Diagnosed** : 13 Jun 2024 - Doug Bogart  
**Test Package** : MOB 2 ( Additional Tests: KF, KV100, PrtCount, VI )

**BASF - GIANNA CREDAROLI**  
 500 WHITE PLAINS RD  
 TARRYTOWN, NY  
 US 10591  
 Contact: MIKE BARRY  
 mike.barry@basf.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: