


# **OIL ANALYSIS REPORT**

Sample Rating Trend

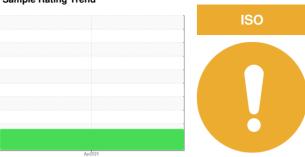

Machine Id

## **KAESER 4958063**

Component Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

### Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

## Contamination

There is a moderate amount of particulates present in the oil.


### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

				Apr2024		
SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA015339		
Sample Date		Client Info		23 Apr 2024		
Machine Age	hrs	Client Info		70859		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		Changed		
Sample Status				ATTENTION		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m	>3	0		
Titanium	ppm	ASTM D5185m	>3	0		
Silver	ppm	ASTM D5185m	>2	0		
Aluminum	ppm	ASTM D5185m	>10	<1		
_ead	ppm	ASTM D5185m	>10	0		
Copper	ppm	ASTM D5185m	>50	<1		
Tin	ppm	ASTM D5185m	>10	0		
Vanadium	ppm	ASTM D5185m		<1		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m	90	59		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m	90	79		
Calcium	ppm	ASTM D5185m	2	3		
Phosphorus	ppm	ASTM D5185m		<1		
Zinc	ppm	ASTM D5185m		6		
Sulfur	ppm	ASTM D5185m		21932		
CONTAMINANTS	S	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	1		
Sodium	ppm	ASTM D5185m		18		
Potassium	ppm	ASTM D5185m	>20	3		
Vater	%	ASTM D6304	>0.05	0.027		
opm Water	ppm	ASTM D6304	>500	273		
FLUID CLEANLII	NESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		4661		
Particles >6µm		ASTM D7647	>1300	<u> </u>		
Particles >14μm		ASTM D7647	>80	<b>105</b>		
Particles >21μm		ASTM D7647	>20	<b>25</b>		
Particles >38μm		ASTM D7647	>4	0		
Particles >71μm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>/17/13	<b>19/18/14</b>		
FLUID DEGRAD	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.42		



## **OIL ANALYSIS REPORT**

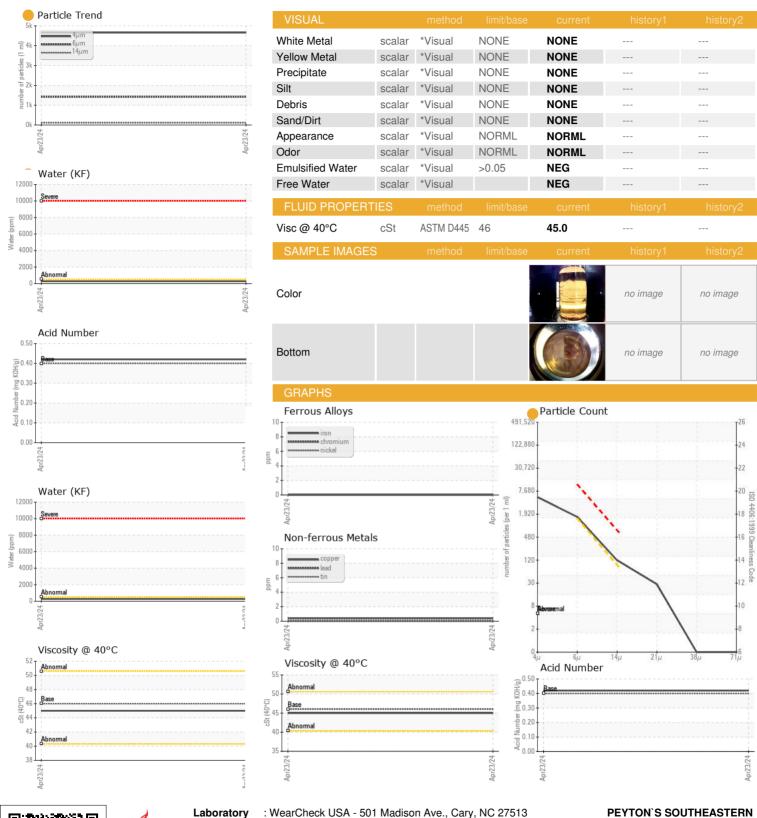



Certificate 12367

Lab Number

Laboratory Sample No.

: KCPA015339 : 06195926 Unique Number : 11058049

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 30 May 2024

Tested : 02 Jun 2024 Diagnosed

: 02 Jun 2024 - Doug Bogart

153 REFRESHMENT LN SW CLEVELAND, TN US 37311 Contact: CHRISTOPHER CARTWRIGHT

Test Package : IND 2 ( Additional Tests: KF, PrtCount ) To discuss this sample report, contact Customer Service at 1-800-237-1369. christopher.cartwright@kroger.com  $^st$  - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) Report Id: PEYCLE [WUSCAR] 06195926 (Generated: 06/02/2024 17:13:02) Rev: 1

Contact/Location: CHRISTOPHER CARTWRIGHT - PEYCLE

T:

F: