

## **OIL ANALYSIS REPORT**

Sample Rating Trend

ISO

Machine Id 2214089 (S/N 1011) Compressor

Fluid KAESER SIGMA (OEM) M-460 (--- GAL)

#### Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

### Contamination

There is a moderate amount of particulates present in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	ΛΑΤΙΟΝ	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA017907	KCPA009320	KCP53503
Sample Date		Client Info		20 May 2024	07 Dec 2023	19 Apr 2023
Machine Age	hrs	Client Info		80671	79127	76937
Oil Age	hrs	Client Info		1544	0	4200
Oil Changed		Client Info		Not Changd	N/A	Changed
Sample Status				ATTENTION	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	0
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	0	0	0
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	<1	3	4
Tin	ppm	ASTM D5185m	>10	0	0	<1
Antimony	ppm	ASTM D5185m				
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	0
Barium	ppm	ASTM D5185m	90	22	6	2
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		0	<1	0
Magnesium	ppm	ASTM D5185m	100	64	39	7
Calcium	ppm	ASTM D5185m	0	<1	<1	0
Phosphorus	ppm	ASTM D5185m	0	<1	1	0
Zinc	ppm	ASTM D5185m	0	14	2	23
Sulfur	ppm	ASTM D5185m	23500	21502	18486	21146
CONTAMINANTS	3	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	2	5	11
Sodium	ppm	ASTM D5185m		18	11	2
Potassium	ppm	ASTM D5185m	>20	2	<1	<1
Water	%	ASTM D6304	>0.05	0.019	0.020	0.008
ppm Water	ppm	ASTM D6304	>500	190	202	83.0
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		3765	946	640
Particles >6µm		ASTM D7647		<mark> </mark> 1350	287	167
Particles >14µm		ASTM D7647	>80	<mark> </mark> 113	24	7
Particles >21µm		ASTM D7647	>20	<mark> </mark> 27	7	2
Particles >38µm		ASTM D7647	>4	2	0	0
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	<b>e</b> 19/18/14	17/15/12	16/15/10
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2
Acid Number (AN) 22:21) Rev: 1	mg KOH/g	ASTM D8045	1.0	<b>0.50</b> Co	0.38 Intact/Location: J	0.41 IIM W - IMPEL


Report Id: IMPELD [WUSCAR] 06195932 (Generated: 06/02/2024 17:22:21) Rev: 1


Page 1 of 2




# **OIL ANALYSIS REPORT**

4μm 6μm			
	1		
			/
	<pre></pre>	/	
ALTERNATION OF THE OWNER.	$\mathbf{X}$		3165663333766683333
	Carrow Carbon Constantion	10000000000000000000000000000000000000	
Feb3/22	Apr19/23	Dec7/23	May20/24
Fer	Apri	De	May
Water (KF	)		



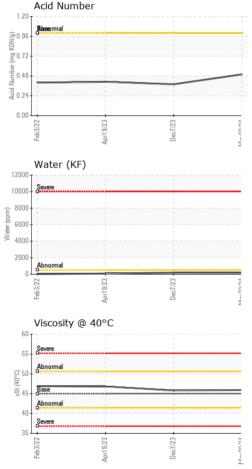

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	45.9	45.8	46.8
SAMPLE IMAGES	;	method	limit/base	current	history1	history2
Color						
Bottom						

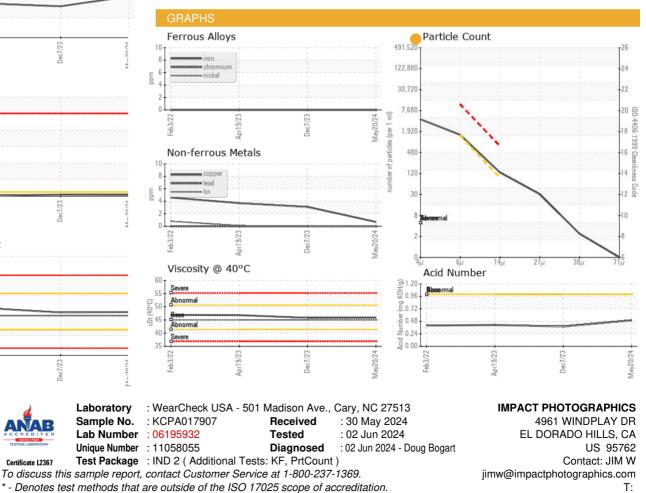

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: IMPELD [WUSCAR] 06195932 (Generated: 06/02/2024 17:22:21) Rev: 1

Certificate 12367

Contact/Location: JIM W - IMPELD Page 2 of 2

F: