

Sample Rating Trend

WATER



KAESER ASD 30 2175954 (S/N 1034)

Compressor

Fluid KAESER SIGMA (OEM) FG-460 (--- GAL)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. We were unable to perform a particle count due to a high concentration of particles present in this sample. We recommend an early resample in 500 hours to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a light concentration of water present in the oil. Moderate concentration of visible dirt/debris present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA018265		
Sample Date		Client Info		23 May 2024		
Machine Age	hrs	Client Info		132727		
Oil Age	hrs	Client Info		3546		
Oil Changed		Client Info		Changed		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	2		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m	>3	0		
Titanium	ppm	ASTM D5185m	>3	0		
Silver	ppm	ASTM D5185m	>2	0		
Aluminum	ppm	ASTM D5185m	>10	7		
Lead	ppm	ASTM D5185m	>10	0		
Copper	ppm	ASTM D5185m	>50	2		
Tin	ppm	ASTM D5185m	>10	0		
Vanadium	ppm	ASTM D5185m		<1		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
ADDITIVES Boron	ppm	method ASTM D5185m	limit/base	current 0	history1	history2
	ppm ppm		limit/base			
Boron		ASTM D5185m	limit/base	0		
Boron Barium	ppm	ASTM D5185m ASTM D5185m	limit/base	0 <1		
Boron Barium Molybdenum	ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m	limit/base	0 <1 0		
Boron Barium Molybdenum Manganese	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	limit/base	0 <1 0 0		
Boron Barium Molybdenum Manganese Magnesium	ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	limit/base	0 <1 0 0 2		
Boron Barium Molybdenum Manganese Magnesium Calcium	ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m		0 <1 0 2 0	 	
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus	ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m		0 <1 0 2 0 220	 	
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m		0 <1 0 2 0 220 107	 	
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	500	0 <1 0 2 0 220 107 1624		
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	500 limit/base	0 <1 0 2 0 220 107 1624 current	 history1	 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m method	500 limit/base	0 <1 0 2 0 220 107 1624 current 0	 history1	 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	500 limit/base >25	0 <1 0 2 0 220 107 1624 current 0 1	 history1	 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m	500 limit/base >25 >20	0 <1 0 2 0 220 107 1624 current 0 1 0	 history1	 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium Water	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m	500 limit/base >25 >20 >0.05	0 <1 0 2 0 220 107 1624 current 0 1 0 ↓ 0.113	 history1	 history2



44 42 Abno 40. May23/24

Built for a lifetime."

OIL ANALYSIS REPORT

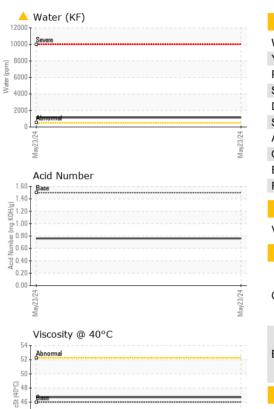

				limit/base	current	history1	history2
	White Metal	scalar	*Visual	NONE	NONE		
	Yellow Metal	scalar	*Visual	NONE	NONE		
	Precipitate	scalar	*Visual	NONE	NONE		
	Silt	scalar	*Visual	NONE	NONE		
	Debris	scalar	*Visual	NONE			
	Sand/Dirt	scalar	*Visual	NONE	NONE		
3/24	Appearance	scalar	*Visual	NORML	NORML		
Ma/23/24	Odor	scalar	*Visual	NORML	NORML		
	Emulsified Water	scalar	*Visual	>0.05	0.2%		
	Free Water	scalar	*Visual		NEG		
				11		Internet and	
	FLUID PROPERT		method	limit/base	current	history1	history2
	Visc @ 40°C	cSt	ASTM D445	46	46.7		
	SAMPLE IMAGES	S	method	limit/base	current	history1	history2
May23/24 -	Color					no image	no image
	Bottom					no image	no image
AFLECAA	Non-ferrous Metal	S		May23/24	Acid Number		
	55 Abnormal			© 2.0			
				(D)HO3 Word Numper Vort	50 Base		
	() 50 } 8380 8380			<u>ຍ</u> 1.0	00		
				Mumb	50 -		
	Abnormal 40				10		
					10		- 124 -
	May23/24			May23/24	May23/24		May23/24
Laboratory Sample No. Lab Number	: WearCheck USA - 50 : KCPA018265 : 06195933 : 11058056	TRAUS FAMIL ROHNE	Y CREAMERY 655 PARK CT ERT PARK, CA US 94928				

Đ,

> Contact/Location: TONY ? - STRROH Page 2 of 2