

OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id

KAESER 6838407

Component Compressor Fluid KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2		
Sample Number		Client Info		KCPA017914	KCPA006139	KCP41723		
Sample Date		Client Info		22 May 2024	04 Oct 2023	22 Jul 2021		
Machine Age	hrs	Client Info		28417	23231	11229		
Oil Age	hrs	Client Info		5186	0	4247		
Oil Changed		Client Info		Changed	N/A	Changed		
Sample Status				NORMAL	ABNORMAL	ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>50	0	<1	0		
Chromium	ppm	ASTM D5185m	>10	0	0	0		
Nickel	ppm	ASTM D5185m	>3	0	0	0		
Titanium	ppm	ASTM D5185m	>3	0	0	0		
Silver	ppm	ASTM D5185m	>2	0	0	<1		
Aluminum	ppm	ASTM D5185m	>10	0	1	0		
Lead	ppm	ASTM D5185m	>10	0	0	0		
Copper	ppm	ASTM D5185m	>50	6	6	12		
Tin	ppm	ASTM D5185m		0	0	0		
Antimony	ppm	ASTM D5185m				0		
Vanadium	ppm	ASTM D5185m		<1	0	0		
Cadmium	ppm	ASTM D5185m		0	0	0		
ADDITIVES	T. L.	method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m	0	0	0	<1		
Barium	ppm	ASTM D5185m	90	0	4	0		
Molybdenum	ppm	ASTM D5185m	0	0	0	0		
Manganese	ppm	ASTM D5185m	0	0	0	0		
Magnesium	ppm	ASTM D5185m	100	0	<1	0		
Calcium	ppm	ASTM D5185m		0	0	2		
Phosphorus	ppm	ASTM D5185m	0	5	24	2		
Zinc	ppm	ASTM D5185m		4	24	0		
Sulfur		ASTM D5185m	23500	4	15501	15627		
	ppm			-				
CONTAMINANTS		method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m	>25	10	11	<1		
Sodium	ppm	ASTM D5185m		<1	<1	0		
Potassium	ppm	ASTM D5185m	>20	0	2	<1		
Water	%	ASTM D6304		0.005	0.007	0.007		
ppm Water	ppm	ASTM D6304	>500	59	70.5	72.2		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2		
Particles >4µm		ASTM D7647		1224	12377	11746		
Particles >6µm		ASTM D7647		437	▲ 5091	▲ 5448		
Particles >14µm		ASTM D7647	>80	57	4 40	▲ 399		
Particles >21µm		ASTM D7647	>20	16	<u> </u>	<u> </u>		
Particles >38µm		ASTM D7647	>4	0	2	1		
Particles >71µm		ASTM D7647		0	0	0		
Oil Cleanliness		ISO 4406 (c)	>/17/13	17/16/13	<u> </u>	2 0/16		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2		
Acid Number (AN) :18:58) Rev: 1	mg KOH/g	ASTM D8045	1.0	0.43 Contact/Lo	0.43 0.41 0.361 Contact/Location: D. STROUD - RECWHE			


Report Id: RECWHE [WUSCAR] 06195934 (Generated: 06/02/2024 17:18:58) Rev: 1


Contact/Location: D. STROUD - RECWHE Page 1 of 2




OIL ANALYSIS REPORT





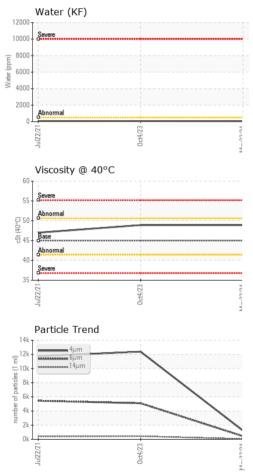

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	48.9	48.9	47
SAMPLE IMAGES	\$	method	limit/base	current	history1	history2
Color						
Bottom						

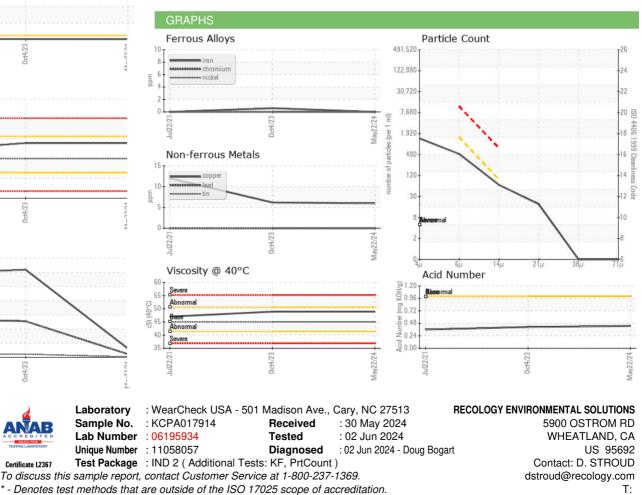

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: RECWHE [WUSCAR] 06195934 (Generated: 06/02/2024 17:18:59) Rev: 1

Certificate 12367

Contact/Location: D. STROUD - RECWHE

F: