




# OIL ANALYSIS REPORT

## Sample Rating Trend

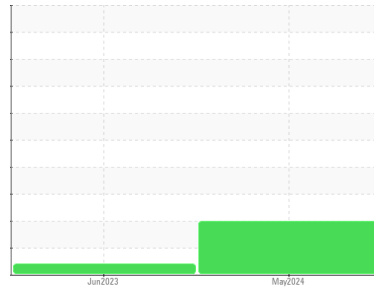

ISO



Machine Id

**KAESER 7817455**

Component

**Compressor**

Fluid

**KAESER SIGMA (OEM) M-460 (--- GAL)**

### DIAGNOSIS

#### ▲ Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### ▲ Contamination

There is a high amount of particulates present in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>KCPA014404</b>	KCPA002354	---
Sample Date	Client Info		<b>17 May 2024</b>	23 Jun 2023	---
Machine Age	hrs	Client Info	<b>8823</b>	6014	---
Oil Age	hrs	Client Info	<b>2809</b>	0	---
Oil Changed	Client Info		<b>Not Chngd</b>	N/A	---
Sample Status			<b>ABNORMAL</b>	ABNORMAL	---

### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	<b>0</b>	2	---
Chromium	ppm	ASTM D5185m >10	<b>0</b>	0	---
Nickel	ppm	ASTM D5185m >3	<b>0</b>	<1	---
Titanium	ppm	ASTM D5185m >3	<b>0</b>	<1	---
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m >10	<b>0</b>	<1	---
Lead	ppm	ASTM D5185m >10	<b>0</b>	<1	---
Copper	ppm	ASTM D5185m >50	<b>2</b>	13	---
Tin	ppm	ASTM D5185m >10	<b>0</b>	<1	---
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	---

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>0</b>	0	---
Barium	ppm	ASTM D5185m 90	<b>33</b>	0	---
Molybdenum	ppm	ASTM D5185m 0	<b>0</b>	0	---
Manganese	ppm	ASTM D5185m	<b>0</b>	<1	---
Magnesium	ppm	ASTM D5185m 100	<b>72</b>	47	---
Calcium	ppm	ASTM D5185m 0	<b>3</b>	4	---
Phosphorus	ppm	ASTM D5185m 0	<b>2</b>	0	---
Zinc	ppm	ASTM D5185m 0	<b>9</b>	12	---
Sulfur	ppm	ASTM D5185m 23500	<b>20898</b>	19392	---

### CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>10</b>	5	---
Sodium	ppm	ASTM D5185m	<b>19</b>	18	---
Potassium	ppm	ASTM D5185m >20	<b>2</b>	3	---
Water	%	ASTM D6304 >0.05	<b>0.021</b>	0.019	---
ppm Water	ppm	ASTM D6304 >500	<b>219</b>	196.5	---






### FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		<b>35772</b>	---	---
Particles >6µm	ASTM D7647	>1300	▲ <b>17562</b>	---	---
Particles >14µm	ASTM D7647	>80	▲ <b>961</b>	---	---
Particles >21µm	ASTM D7647	>20	▲ <b>133</b>	---	---
Particles >38µm	ASTM D7647	>4	▲ <b>7</b>	---	---
Particles >71µm	ASTM D7647	>3	<b>0</b>	---	---
Oil Cleanliness	ISO 4406 (c)	>--/17/13	▲ <b>22/21/17</b>	---	---

### FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 1.0	<b>0.39</b>	0.31	---


# OIL ANALYSIS REPORT

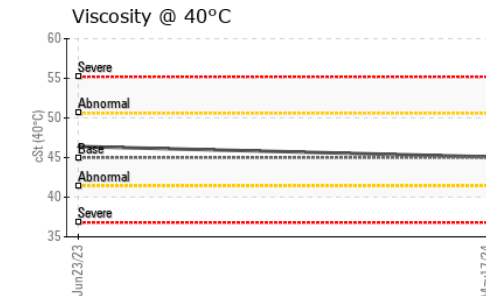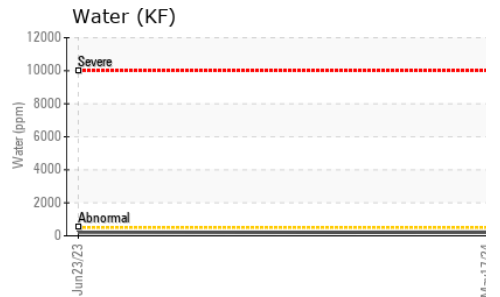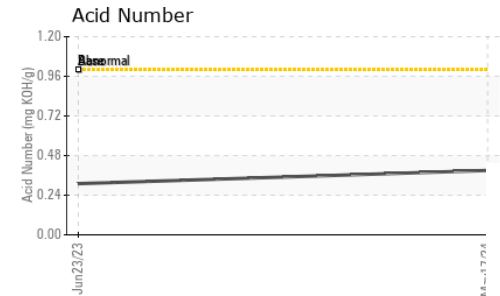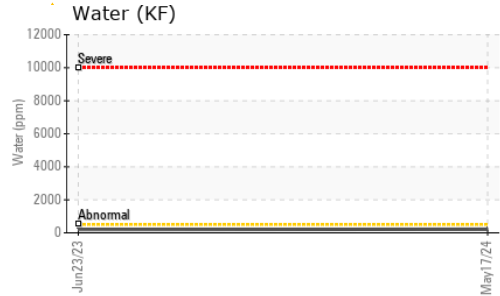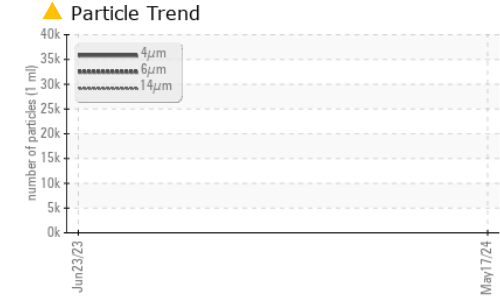





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	▲ MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	45.1	46.4

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

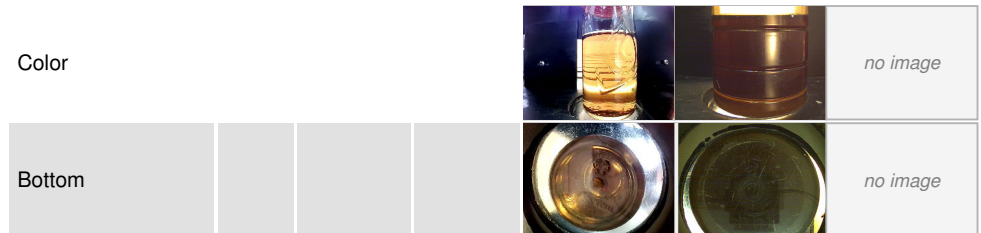

## GRAPHS

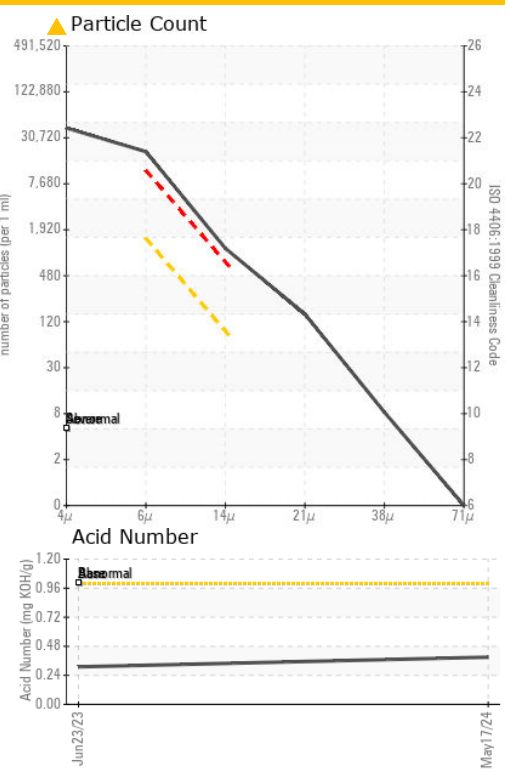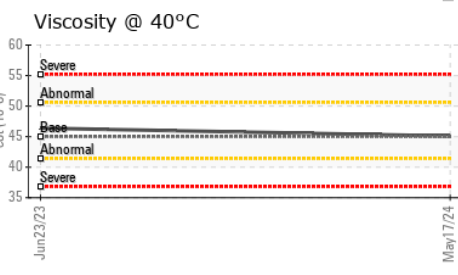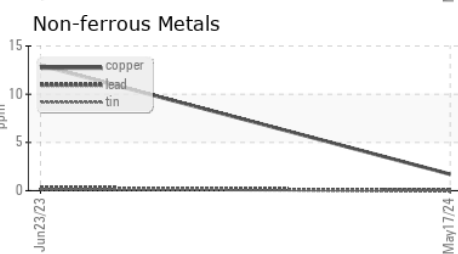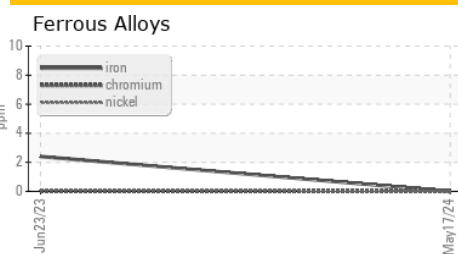

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KCPA014404 **Received** : 30 May 2024  
**Lab Number** : 06195935 **Tested** : 02 Jun 2024  
**Unique Number** : 11058058 **Diagnosed** : 02 Jun 2024 - Doug Bogart  
**Test Package** : IND 2 ( Additional Tests: KF, PrtCount )

**AMAZON SMF 6**  
 4930 ALLBAUGH DR  
 SACRAMENTO, CA  
 US 95837  
 Contact: B. BRISM  
 bbrism@amazon.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)