


OIL ANALYSIS REPORT

NER

RHEINSTAHL NH3 - NER-SWING 5 OK20091 (S/N 98M-139-01001)

Refrigeration Compressor

JAX CRYOGUARD PLUS 68 (150 GAL)

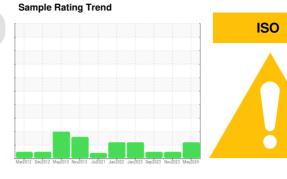

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		USP242794	USP0003608	USP242795
Sample Date		Client Info		29 May 2024	19 Nov 2023	27 Sep 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>8	0	0	0
Chromium	ppm	ASTM D5185m	>2	0	0	0
Nickel	ppm	ASTM D5185m		0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>3	0	<1	<1
Lead	ppm	ASTM D5185m	>2	0	0	0
Copper	ppm	ASTM D5185m	>8	0	0	0
Tin	ppm	ASTM D5185m	>4	0	0	0
Vanadium	ppm	ASTM D5185m		<1	<1	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m		0	<1	0
Calcium	ppm	ASTM D5185m		0	1	0
Phosphorus	ppm	ASTM D5185m		0	1	0
Zinc	ppm	ASTM D5185m		2	0	0
Sulfur	ppm	ASTM D5185m		24	24	0
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	0	0	<1
Sodium	ppm	ASTM D5185m		0	1	<1
Potassium	ppm	ASTM D5185m	>20	0	2	0
Water	%	ASTM D6304	>0.01	0.003	0.001	0.001
ppm Water	ppm	ASTM D6304	>100	39	14.4	6.9
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4μm		ASTM D7647	>10000	16379	8827	577
Particles >6µm		ASTM D7647	>2500	<u> </u>	2149	154
Particles >14μm		ASTM D7647	>320	165	101	6
Particles >21µm		ASTM D7647	>80	16	26	2
Particles >38µm		ASTM D7647	>20	1	2	0
Particles >71μm		ASTM D7647		0	0	0
Oil Cleanliness		ISO 4406 (c)	>20/18/15	<u>21/20/15</u>	20/18/14	16/14/10
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974		0.014	0.015	0.015



OIL ANALYSIS REPORT

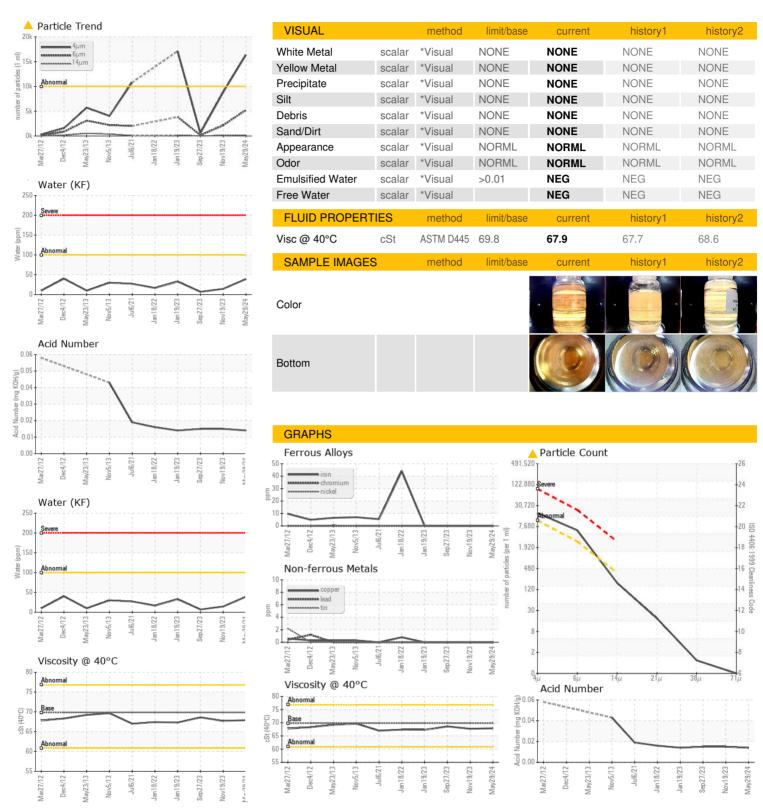





Certificate 12367

Sample No.

Laboratory Lab Number

: USP242794 : 06195953 Unique Number : 11058076

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 30 May 2024 **Tested** : 02 Jun 2024

Diagnosed

: 02 Jun 2024 - Doug Bogart

Test Package : IND 2 To discuss this sample report, contact Customer Service at 1-800-237-1369.

 st - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) T: (918)696-8296

Contact: DENNIS LONGSHORE

SCHWANS BAKERY

5 EAST WALNUT

STILWELL, OK

US 74960

F:

Report Id: SCHSTI [WUSCAR] 06195953 (Generated: 06/02/2024 17:39:13) Rev: 1