





# OIL ANALYSIS REPORT



Machine Id  
**CATERPILLAR HD 501 (S/N CGE57513)**  
 Component  
**Diesel Engine**  
 Fluid  
**VALVOLINE 15W40 (--- GAL)**

Sample Rating Trend

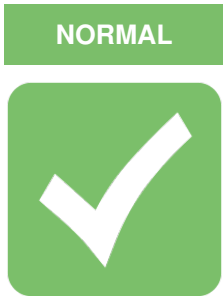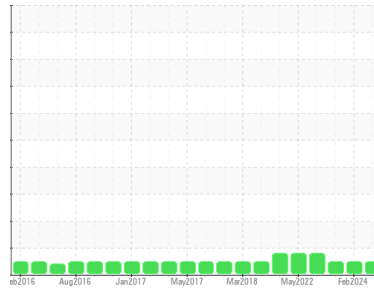

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1    | history2    |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info |             | <b>RW0005098</b>   | RW0005102   | RW0004604   |
| Sample Date   | Client Info |             | <b>10 May 2024</b> | 01 Feb 2024 | 29 Nov 2023 |
| Machine Age   | hrs         | Client Info | <b>9906</b>        | 9309        | 8907        |
| Oil Age       | hrs         | Client Info | <b>500</b>         | 416         | 457         |
| Oil Changed   | Client Info |             | <b>Changed</b>     | Changed     | Changed     |
| Sample Status |             |             | <b>NORMAL</b>      | NORMAL      | NORMAL      |

## CONTAMINATION

|        | method    | limit/base | current        | history1 | history2 |
|--------|-----------|------------|----------------|----------|----------|
| Fuel   | WC Method | >5         | <b>&lt;1.0</b> | <1.0     | <1.0     |
| Water  | WC Method | >0.2       | <b>NEG</b>     | NEG      | NEG      |
| Glycol | WC Method |            | <b>NEG</b>     | NEG      | NEG      |

## WEAR METALS

|          | method | limit/base       | current      | history1 | history2 |
|----------|--------|------------------|--------------|----------|----------|
| Iron     | ppm    | ASTM D5185m >100 | <b>15</b>    | 8        | 6        |
| Chromium | ppm    | ASTM D5185m >20  | <b>&lt;1</b> | <1       | <1       |
| Nickel   | ppm    | ASTM D5185m >2   | <b>0</b>     | <1       | 0        |
| Titanium | ppm    | ASTM D5185m >2   | <b>0</b>     | 0        | 0        |
| Silver   | ppm    | ASTM D5185m >2   | <b>0</b>     | 0        | 0        |
| Aluminum | ppm    | ASTM D5185m >25  | <b>1</b>     | 2        | 2        |
| Lead     | ppm    | ASTM D5185m >40  | <b>&lt;1</b> | 0        | 0        |
| Copper   | ppm    | ASTM D5185m >330 | <b>2</b>     | 2        | 2        |
| Tin      | ppm    | ASTM D5185m >15  | <b>0</b>     | 0        | 0        |
| Vanadium | ppm    | ASTM D5185m      | <b>&lt;1</b> | 0        | 0        |
| Cadmium  | ppm    | ASTM D5185m      | <b>0</b>     | 0        | 0        |

## ADDITIVES

|            | method | limit/base       | current      | history1 | history2 |
|------------|--------|------------------|--------------|----------|----------|
| Boron      | ppm    | ASTM D5185m 39   | <b>0</b>     | 6        | 32       |
| Barium     | ppm    | ASTM D5185m 1    | <b>0</b>     | 0        | 0        |
| Molybdenum | ppm    | ASTM D5185m 49   | <b>2</b>     | 12       | 56       |
| Manganese  | ppm    | ASTM D5185m 1    | <b>&lt;1</b> | <1       | <1       |
| Magnesium  | ppm    | ASTM D5185m 616  | <b>31</b>    | 12       | 17       |
| Calcium    | ppm    | ASTM D5185m 1554 | <b>2557</b>  | 2359     | 2308     |
| Phosphorus | ppm    | ASTM D5185m 899  | <b>972</b>   | 993      | 1021     |
| Zinc       | ppm    | ASTM D5185m 1069 | <b>1220</b>  | 1195     | 1228     |
| Sulfur     | ppm    | ASTM D5185m 2624 | <b>4375</b>  | 3903     | 4049     |

## CONTAMINANTS

|           | method | limit/base      | current  | history1 | history2 |
|-----------|--------|-----------------|----------|----------|----------|
| Silicon   | ppm    | ASTM D5185m >25 | <b>7</b> | 4        | 3        |
| Sodium    | ppm    | ASTM D5185m     | <b>0</b> | <1       | 3        |
| Potassium | ppm    | ASTM D5185m >20 | <b>1</b> | 1        | 0        |

## INFRA-RED

|           | method   | limit/base      | current     | history1 | history2 |
|-----------|----------|-----------------|-------------|----------|----------|
| Soot %    | %        | *ASTM D7844 >3  | <b>2.4</b>  | 2        | 2.2      |
| Nitration | Abs/cm   | *ASTM D7624 >20 | <b>8.8</b>  | 8.9      | 10.1     |
| Sulfation | Abs/.1mm | *ASTM D7415 >30 | <b>21.8</b> | 21.1     | 21.5     |


## FLUID DEGRADATION

|                  | method   | limit/base      | current     | history1 | history2 |
|------------------|----------|-----------------|-------------|----------|----------|
| Oxidation        | Abs/.1mm | *ASTM D7414 >25 | <b>11.1</b> | 11.9     | 14.0     |
| Base Number (BN) | mg KOH/g | ASTM D2896 6.9  | <b>7.74</b> | 7.29     | 8.83     |




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

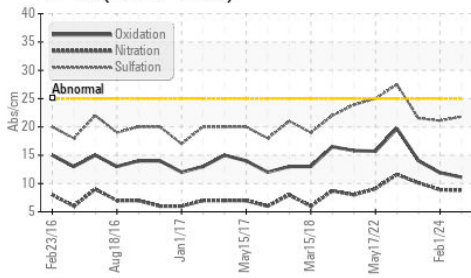

Base Number

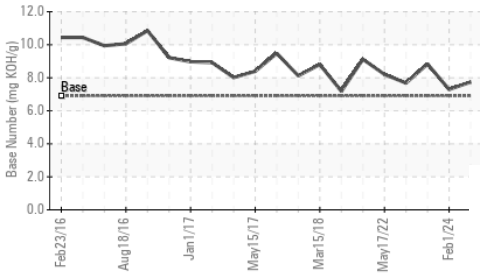









Viscosity @ 100°C

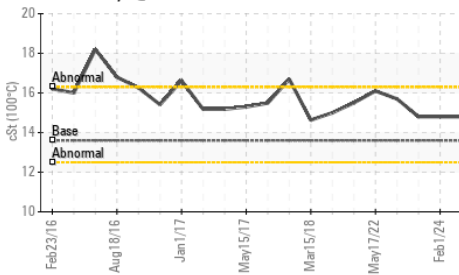

| VISUAL           | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | LIGHT    | NONE     |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual    | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual    | NONE    | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual    | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual    | >0.2    | NEG      | NEG      |
| Free Water       | scalar | *Visual    |         | NEG      | NEG      |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 100°C     | cSt    | ASTM D445  | 13.6    | 14.8     | 14.8     |

## GRAPHS

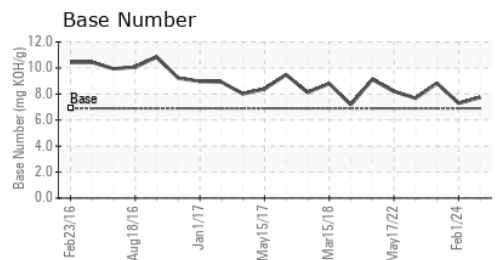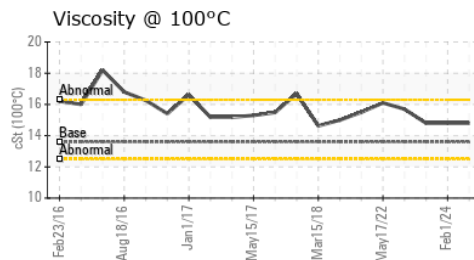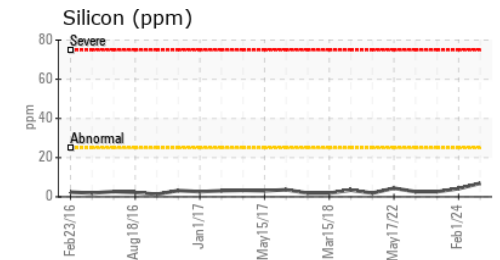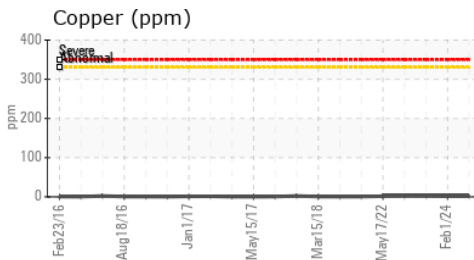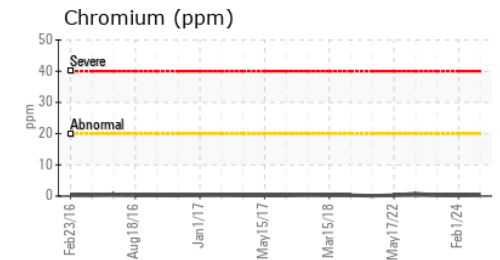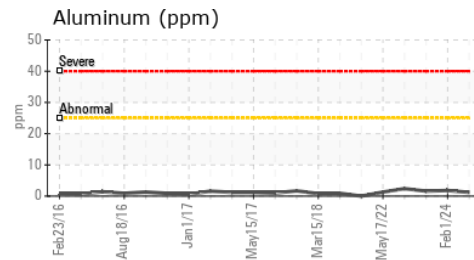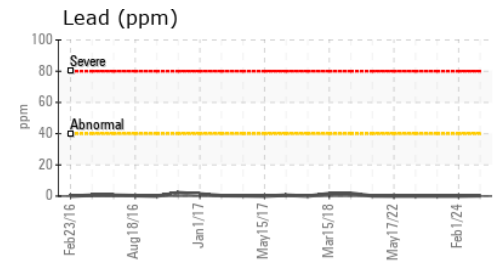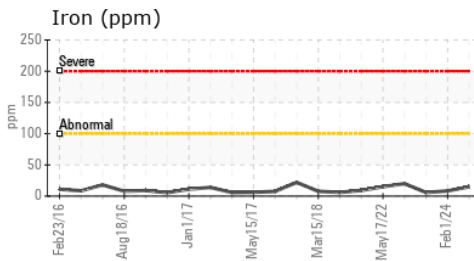

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : RW0005098  
**Lab Number** : 06196022  
**Unique Number** : 11058145  
**Test Package** : MOB 2  
**Received** : 30 May 2024  
**Tested** : 02 Jun 2024  
**Diagnosed** : 02 Jun 2024 - Don Baldrige

**CORDES FOREST**  
 PO BOX 277  
 HILLMAN, MI  
 US 49746

Contact: DAVE HORNBACHER  
 davehornbacher@yahoo.com  
 T: (989)884-2119  
 F: (989)742-4845

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)