




# OIL ANALYSIS REPORT

## Sample Rating Trend

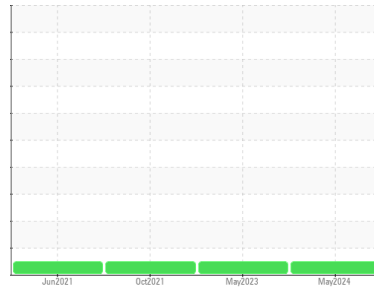

**NORMAL**



Machine Id  
**TORO 5410-D 19182-3 (S/N 405498934)**  
 Component  
**Diesel Engine**  
 Fluid  
**TORO 10W30 (6 QTS)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>TR06196033</b>	TR05841641	TR05388313
Sample Date	Client Info			<b>16 May 2024</b>	03 May 2023	20 Oct 2021
Machine Age	hrs	Client Info		<b>1043</b>	690	430
Oil Age	hrs	Client Info		<b>1043</b>	258	430
Oil Changed	Client Info			<b>Not Chngd</b>	Not Chngd	Not Chngd
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>62</b>	49	30
Chromium	ppm	ASTM D5185m	>20	<b>1</b>	1	<1
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>4</b>	2	4
Lead	ppm	ASTM D5185m	>40	<b>7</b>	8	6
Copper	ppm	ASTM D5185m	>330	<b>46</b>	62	29
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	<1
Antimony	ppm	ASTM D5185m		<b>---</b>	---	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>4</b>	3	6
Barium	ppm	ASTM D5185m		<b>3</b>	0	1
Molybdenum	ppm	ASTM D5185m		<b>84</b>	74	71
Manganese	ppm	ASTM D5185m		<b>2</b>	2	2
Magnesium	ppm	ASTM D5185m		<b>752</b>	829	843
Calcium	ppm	ASTM D5185m		<b>2350</b>	1647	1594
Phosphorus	ppm	ASTM D5185m		<b>1072</b>	1050	1032
Zinc	ppm	ASTM D5185m		<b>1403</b>	1340	1337
Sulfur	ppm	ASTM D5185m		<b>4131</b>	3584	3161




CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>32</b>	43	42
Sodium	ppm	ASTM D5185m		<b>10</b>	9	10
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	2	0

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.3</b>	0.2	0.2
Nitration	Abs/cm	*ASTM D7624	>20	<b>11.9</b>	10.0	9.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>22.9</b>	19.8	20.1

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>21.6</b>	19.1	17.5
Base Number (BN)	mg KOH/g	ASTM D2896		<b>9.50</b>	10.98	9.87











# OIL ANALYSIS REPORT

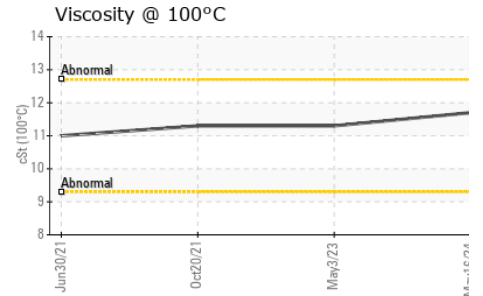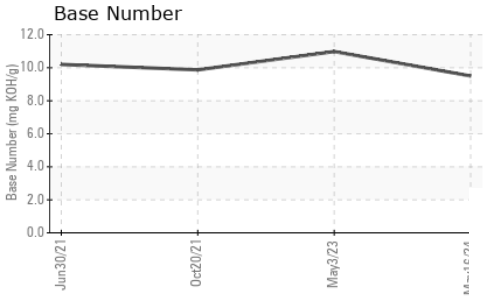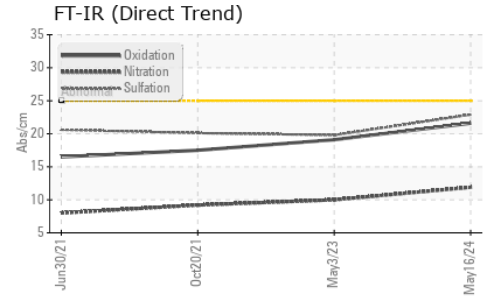

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	11.7	11.3	11.3

## GRAPHS

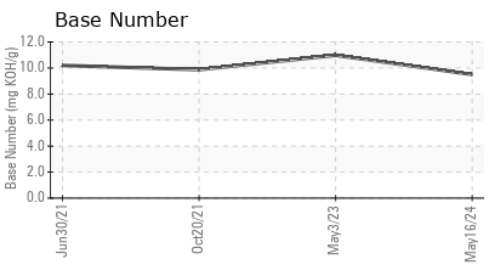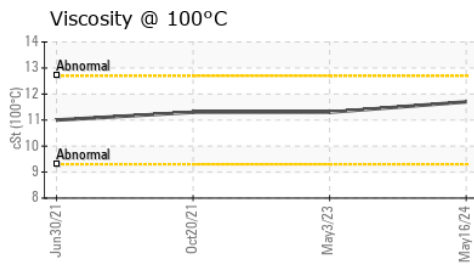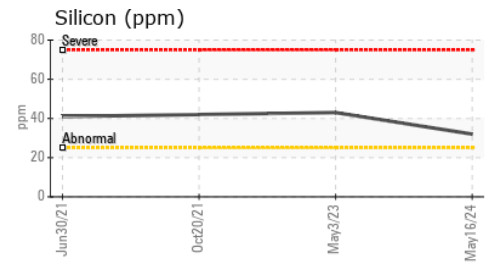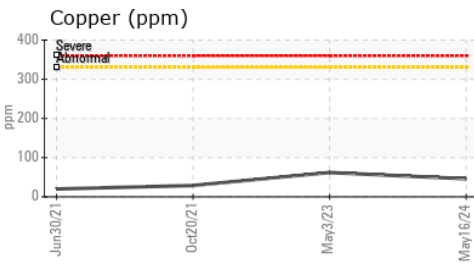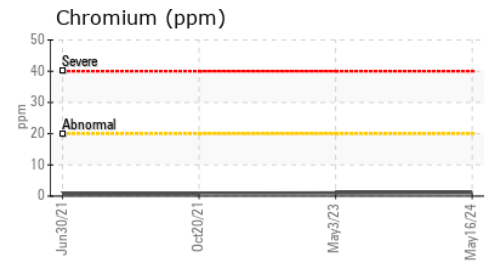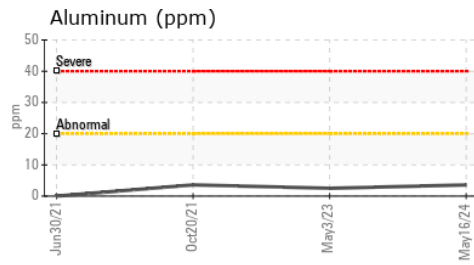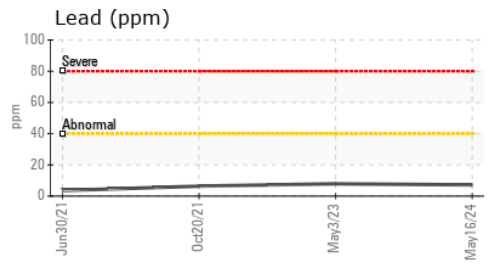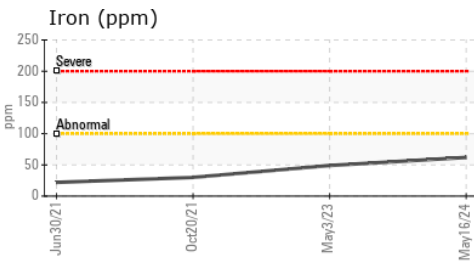

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : TR06196033      **Received** : 30 May 2024  
**Lab Number** : 06196033      **Tested** : 02 Jun 2024  
**Unique Number** : 11058156      **Diagnosed** : 02 Jun 2024 - Don Baldrige  
**Test Package** : MOB 2

**CITY PARK GOLF COURSE**  
 3201 E 23RD AVE  
 DENVER, CO  
 US 80205  
 Contact: COLIN MURPHY  
 Colin.murphy@denvergov.org

To discuss this sample report, contact Customer Service at 1-800-827-0711.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)