



OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



Machine Id
KENWORTH 3037
 Component
Front Differential
 Fluid
GEAR OIL SAE 75W90 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0877293	---	---
Sample Date	Client Info			27 May 2024	---	---
Machine Age	mls	Client Info		221574	---	---
Oil Age	mls	Client Info		0	---	---
Oil Changed	Client Info			Not Changed	---	---
Sample Status				NORMAL	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>.2	NEG	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>500	412	---	---
Chromium	ppm	ASTM D5185m	>10	2	---	---
Nickel	ppm	ASTM D5185m	>10	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>25	7	---	---
Lead	ppm	ASTM D5185m	>25	<1	---	---
Copper	ppm	ASTM D5185m	>100	3	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
Cadmium	ppm	ASTM D5185m		<1	---	---


ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	400	154	---	---
Barium	ppm	ASTM D5185m	200	2	---	---
Molybdenum	ppm	ASTM D5185m	12	<1	---	---
Manganese	ppm	ASTM D5185m		21	---	---
Magnesium	ppm	ASTM D5185m	12	4	---	---
Calcium	ppm	ASTM D5185m	150	13	---	---
Phosphorus	ppm	ASTM D5185m	1650	1374	---	---
Zinc	ppm	ASTM D5185m	125	20	---	---
Sulfur	ppm	ASTM D5185m	22500	24408	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>75	58	---	---
Sodium	ppm	ASTM D5185m		13	---	---
Potassium	ppm	ASTM D5185m	>20	3	---	---

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	MODER	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>.2	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---






OIL ANALYSIS REPORT

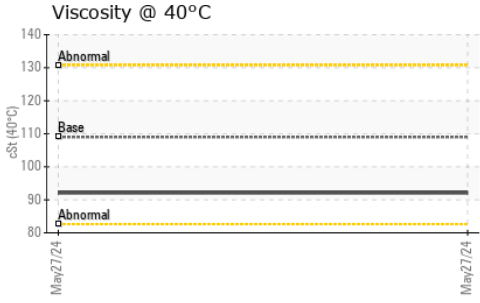

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	109	92.1	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

GRAPHS

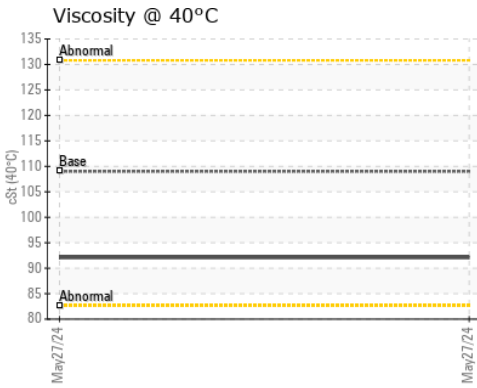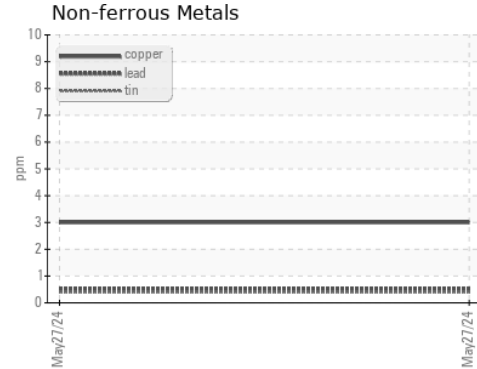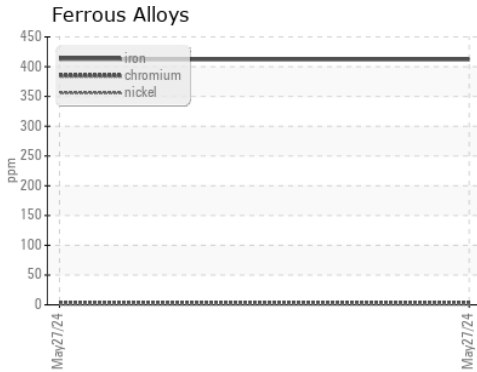

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0877293
Lab Number : 06196074
Unique Number : 11058197
Test Package : FLEET

Received : 30 May 2024
Tested : 03 Jun 2024
Diagnosed : 03 Jun 2024 - Sean Felton

LTI/MILKY WAY - MOUNT VERNON
 3814 OLD HWY 99 S RD
 MOUNT VERNON, VA
 US 98273

Contact: JOHN VAN WINGERDEN

jvw@lynden.com

T: (360)354-2101

F: (360)354-3571

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)