




OIL ANALYSIS REPORT

Sample Rating Trend

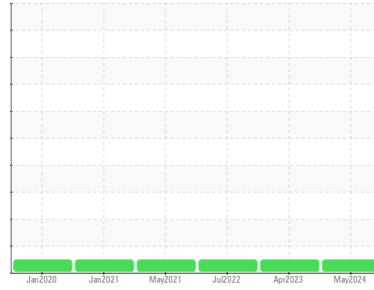

NORMAL



Machine Id

KENWORTH 3039

Component

Diesel Engine

Fluid

CHEVRON DELO 400 XLE 10W30 (--- QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0877295	WC0625632	WC0462943
Sample Date	Client Info			13 May 2024	24 Apr 2023	01 Jul 2022
Machine Age	mls	Client Info		0	228886	161400
Oil Age	mls	Client Info		48000	0	0
Oil Changed	Client Info			Changed	Changed	N/A
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	34	29	62
Chromium	ppm	ASTM D5185m	>20	<1	<1	1
Nickel	ppm	ASTM D5185m	>4	0	<1	0
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m	>3	<1	<1	0
Aluminum	ppm	ASTM D5185m	>20	8	8	13
Lead	ppm	ASTM D5185m	>40	<1	0	<1
Copper	ppm	ASTM D5185m	>330	3	4	13
Tin	ppm	ASTM D5185m	>15	1	<1	2
Antimony	ppm	ASTM D5185m		---	---	---
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		18	20	21
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		8	17	16
Manganese	ppm	ASTM D5185m		<1	<1	1
Magnesium	ppm	ASTM D5185m		729	757	689
Calcium	ppm	ASTM D5185m	2900	1430	1430	1522
Phosphorus	ppm	ASTM D5185m	1100	732	740	785
Zinc	ppm	ASTM D5185m	1200	825	887	936
Sulfur	ppm	ASTM D5185m	4000	3134	3405	3349

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	7	5	7
Sodium	ppm	ASTM D5185m		6	3	3
Potassium	ppm	ASTM D5185m	>20	13	5	15


INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.9	1	1.4
Nitration	Abs/cm	*ASTM D7624	>20	11.5	11.5	15.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	26.7	27.3	32.9

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	22.6	23.5	29.9
Base Number (BN)	mg KOH/g	ASTM D2896	10.3	4.4	4.2	5




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

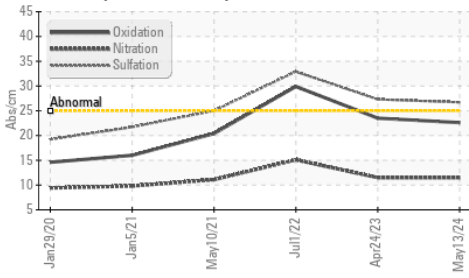

Base Number

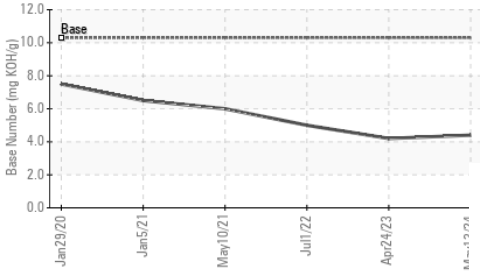

Viscosity @ 100°C

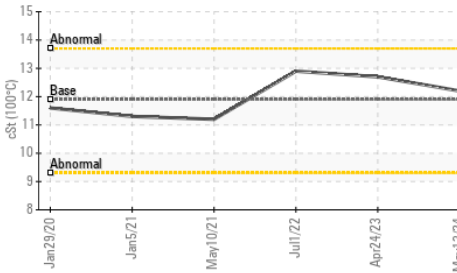


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	11.9	12.2	12.7

GRAPHS


Ferrous Alloys

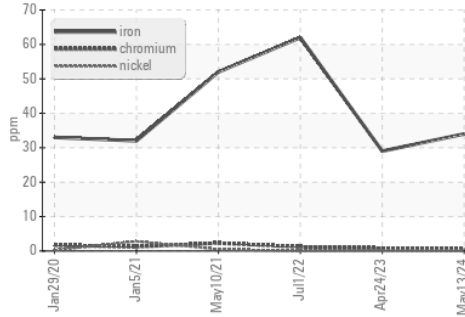


Non-ferrous Metals

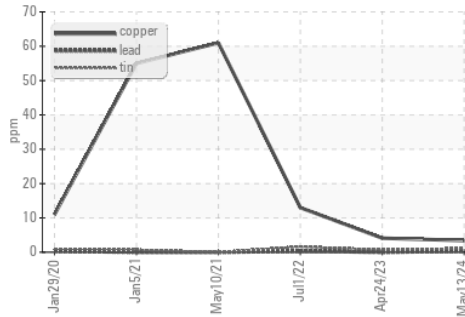

Viscosity @ 100°C

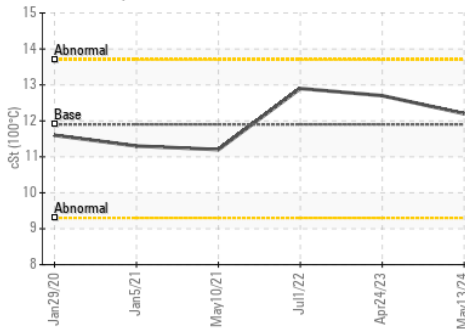

Base Number

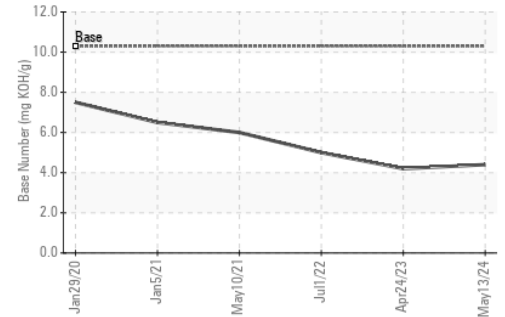

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : WC0877295
 Lab Number : 06196134
 Unique Number : 11058257
 Test Package : FLEET

Received : 30 May 2024
 Tested : 31 May 2024
 Diagnosed : 02 Jun 2024 - Don Baldrige

LTI/MILKY WAY - MOUNT VERNON
 3814 OLD HWY 99 S RD
 MOUNT VERNON, WA
 US 98273

Contact: JOHN VAN WINGERDEN

jvw@lynden.com

T: (360)354-2101

F: (360)354-3571

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)