


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

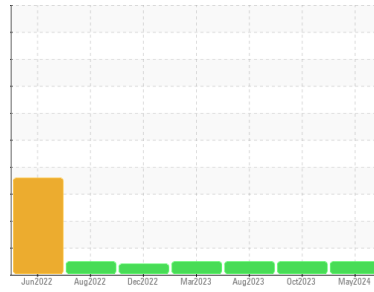

Machine Id  
**1782**  
Component  
**Diesel Engine**  
Fluid  
**SAE 0W20 (--- GAL)**

**DIAGNOSIS**

**Recommendation**

Resample at the next service interval to monitor.

**Wear**

All component wear rates are normal.

**Contamination**

There is no indication of any contamination in the oil.

**Fluid Condition**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>HRE0000169</b>	WC0860430	WC0827091
Sample Date	Client Info			<b>30 May 2024</b>	29 Oct 2023	09 Aug 2023
Machine Age	mls	Client Info		<b>71035</b>	66849	62755
Oil Age	mls	Client Info		<b>6000</b>	6000	6000
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>18</b>	18	17
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m	>3	<b>2</b>	<1	<1
Aluminum	ppm	ASTM D5185m	>20	<b>6</b>	4	3
Lead	ppm	ASTM D5185m	>40	<b>0</b>	0	<1
Copper	ppm	ASTM D5185m	>330	<b>2</b>	3	4
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>1</b>	<1	2
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>33</b>	12	12
Barium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>282</b>	261	238
Manganese	ppm	ASTM D5185m		<b>5</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>522</b>	439	525
Calcium	ppm	ASTM D5185m		<b>1346</b>	1248	1464
Phosphorus	ppm	ASTM D5185m		<b>676</b>	569	670
Zinc	ppm	ASTM D5185m		<b>815</b>	817	901
Sulfur	ppm	ASTM D5185m		<b>2354</b>	1967	2596


CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>30</b>	24	23
Sodium	ppm	ASTM D5185m		<b>1</b>	2	1
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	2	1

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.1</b>	0	0.1
Nitration	Abs/cm	*ASTM D7624	>20	<b>10.6</b>	10.6	10.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>21.2</b>	22.0	21.5


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>16.4</b>	17.9	16.7
Base Number (BN)	mg KOH/g	ASTM D2896		<b>3.7</b>	3.4	4.0

# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

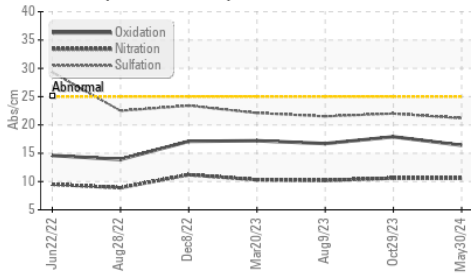

Base Number

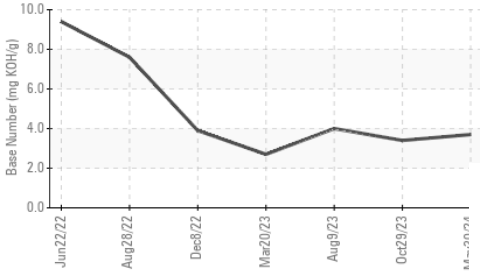

Viscosity @ 100°C

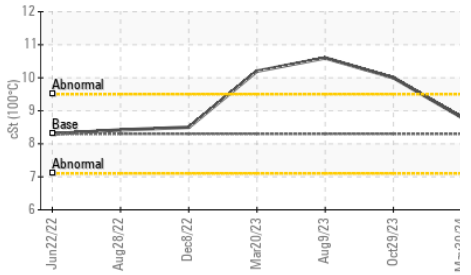


PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445 8.3	<b>8.8</b>	10.0	10.6

GRAPHS


Ferrous Alloys

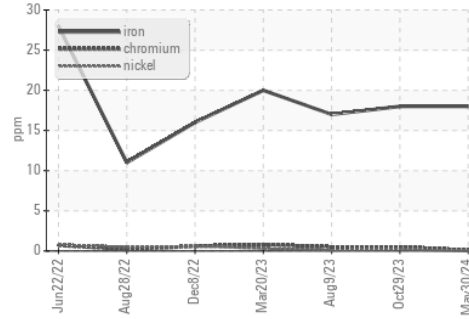


Non-ferrous Metals

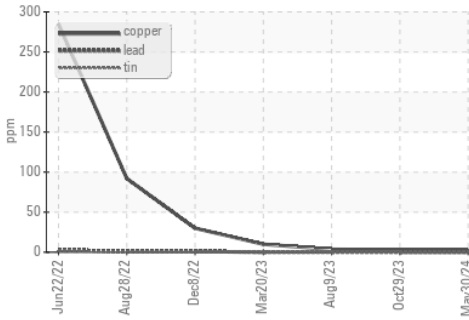

Viscosity @ 100°C

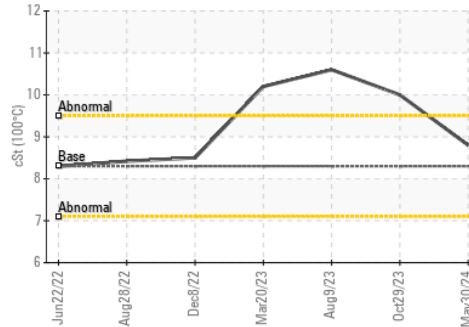

Base Number

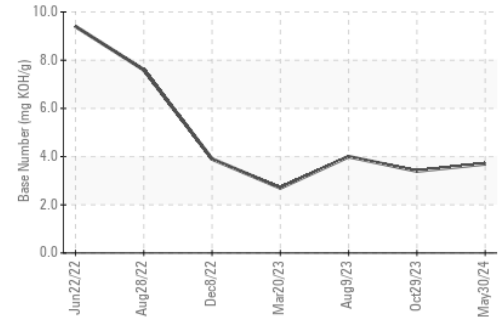

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : HRE0000169  
**Lab Number** : 06196202  
**Unique Number** : 11058325  
**Test Package** : FLEET

**Received** : 31 May 2024  
**Tested** : 03 Jun 2024  
**Diagnosed** : 03 Jun 2024 - Don Baldrige

**TOWN OF CHAPEL HILL**  
 6900 MILLHOUSE RD  
 CHAPEL HILL, NC  
 US 27516

Contact: Lisa DePasqua  
 ldepasqua@townofchapelhill.org  
 T: (919)696-4941

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)