


# PROBLEM SUMMARY

Sample Rating Trend



**FUEL**

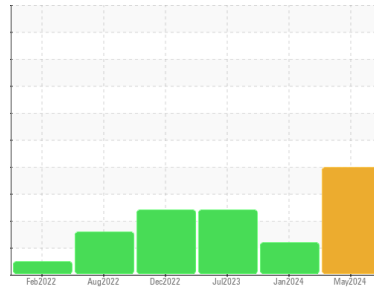

Machine Id

**9908**




Component

**Diesel Engine**

Fluid

**DIESEL ENGINE OIL SAE 15W40 (--- GAL)**

## COMPONENT CONDITION SUMMARY

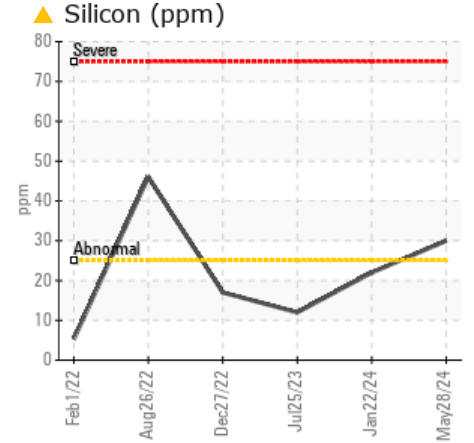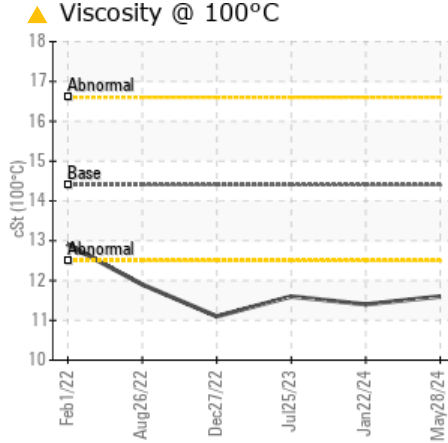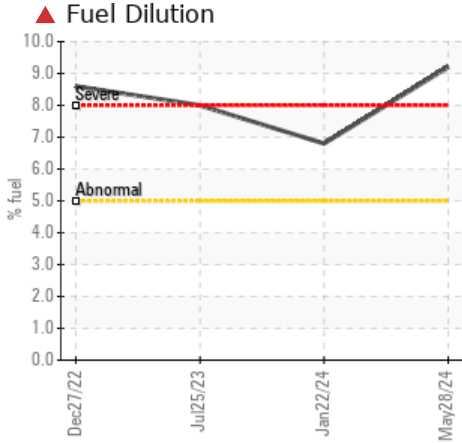

## RECOMMENDATION

We advise that you check the fuel injection system. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

## PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	ABNORMAL	SEVERE
Silicon	ppm	ASTM D5185m	>25	▲ 30	22	12
Fuel	%	ASTM D3524	>5	▲ 9.2	▲ 6.8	▲ 8.0
Visc @ 100°C	cSt	ASTM D445	14.4	▲ 11.6	▲ 11.4	▲ 11.6

Customer Id: TOWCHANC  
Sample No.: HRE0000108  
Lab Number: 06196203  
Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:  
Don Baldrige +1  
[don.b505@comcast.net](mailto:don.b505@comcast.net)


To change component or sample information:  
Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Fuel/injector System	---	---	?	We advise that you check the fuel injection system.


HISTORICAL DIAGNOSIS

FUEL




**22 Jan 2024 Diag: Wes Davis**  
 The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample. All component wear rates are normal. There is a moderate amount of fuel present in the oil. Tests confirm the presence of fuel in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

view report




FUEL




**25 Jul 2023 Diag: Wes Davis**  
 We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample. All component wear rates are normal. There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

view report




FUEL



**27 Dec 2022 Diag: Jonathan Hester**  
 We advise that you check the fuel injection system. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition. All component wear rates are normal. There is a high amount of fuel present in the oil. Fuel is present in the oil and is lowering the viscosity. The BN result indicates that there is suitable alkalinity remaining in the oil.

view report





Machine Id


**9908**

Component

**Diesel Engine**

Fluid

**DIESEL ENGINE OIL SAE 15W40 (--- GAL)**

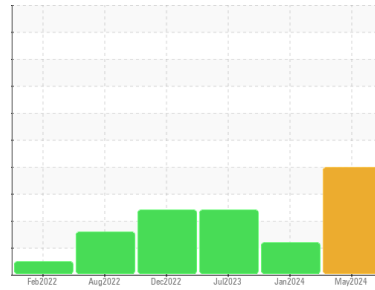

**DIAGNOSIS**

**▲ Recommendation**

We advise that you check the fuel injection system. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

**Wear**

All component wear rates are normal.

**▲ Contamination**

There is a high amount of fuel present in the oil. Elemental level of silicon (Si) above normal.

**▲ Fluid Condition**

Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>HRE0000108</b>	WC0827038	WC0827102
Sample Date	Client Info			<b>28 May 2024</b>	22 Jan 2024	25 Jul 2023
Machine Age	mls	Client Info		<b>0</b>	0	366409
Oil Age	mls	Client Info		<b>0</b>	0	6000
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>SEVERE</b>	ABNORMAL	SEVERE

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>38</b>	22	35
Chromium	ppm	ASTM D5185m	>20	<b>3</b>	2	2
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185m	>3	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>3</b>	2	2
Lead	ppm	ASTM D5185m	>40	<b>24</b>	9	7
Copper	ppm	ASTM D5185m	>330	<b>16</b>	11	8
Tin	ppm	ASTM D5185m	>15	<b>2</b>	2	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0






ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	250	<b>56</b>	33	16
Barium	ppm	ASTM D5185m	10	<b>&lt;1</b>	0	2
Molybdenum	ppm	ASTM D5185m	100	<b>71</b>	60	71
Manganese	ppm	ASTM D5185m		<b>2</b>	1	1
Magnesium	ppm	ASTM D5185m	450	<b>408</b>	347	391
Calcium	ppm	ASTM D5185m	3000	<b>1567</b>	1522	1951
Phosphorus	ppm	ASTM D5185m	1150	<b>1001</b>	952	1073
Zinc	ppm	ASTM D5185m	1350	<b>1166</b>	1119	1337
Sulfur	ppm	ASTM D5185m	4250	<b>3239</b>	2957	4036

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>▲ 30</b>	22	12
Sodium	ppm	ASTM D5185m	>158	<b>8</b>	10	3
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	0
Fuel	%	ASTM D3524	>5	<b>▲ 9.2</b>	▲ 6.8	▲ 8.0

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.5</b>	0.3	0.4
Nitration	Abs/cm	*ASTM D7624	>20	<b>11.7</b>	9.2	10.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>24.5</b>	20.6	23.8

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>24.4</b>	18.2	22.4
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>5.6</b>	7.9	6.3





# OIL ANALYSIS REPORT

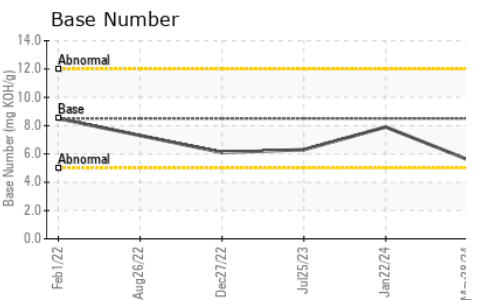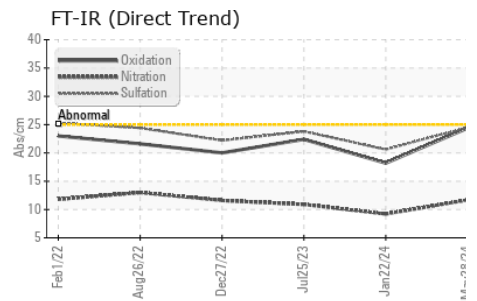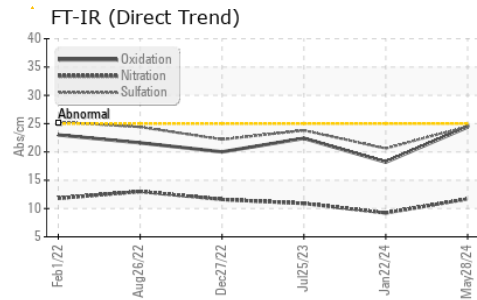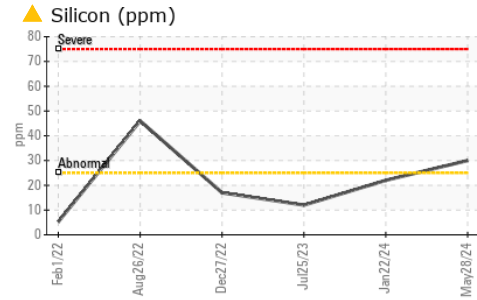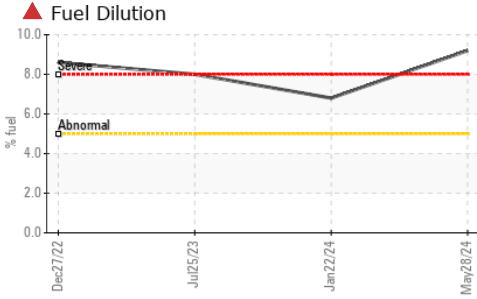

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	▲ 11.6	▲ 11.4

## GRAPHS

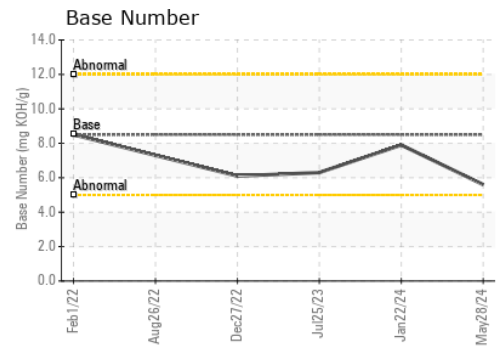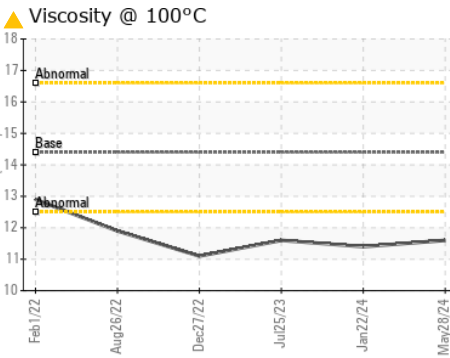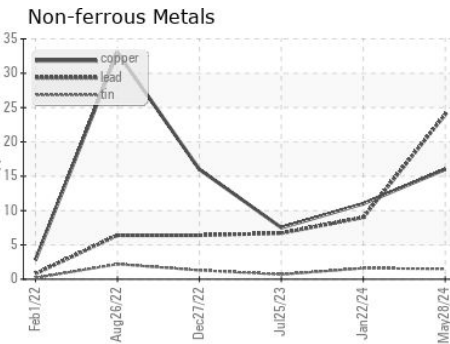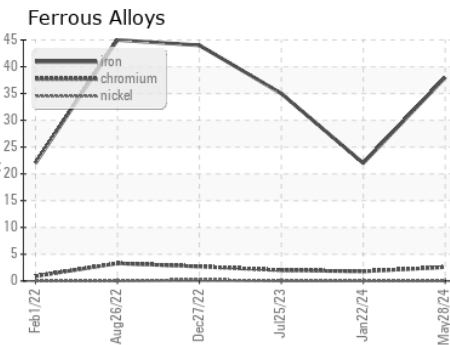

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : HRE0000108 **Received** : 31 May 2024  
**Lab Number** : 06196203 **Tested** : 05 Jun 2024  
**Unique Number** : 11058326 **Diagnosed** : 05 Jun 2024 - Don Baldrige  
**Test Package** : FLEET ( Additional Tests: PercentFuel )

**TOWN OF CHAPEL HILL**  
 6900 MILLHOUSE RD  
 CHAPEL HILL, NC  
 US 27516  
 Contact: Lisa DePasqua  
 ldepasqua@townofchapelhill.org  
 T: (919)696-4941  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)