




OIL ANALYSIS REPORT

Sample Rating Trend

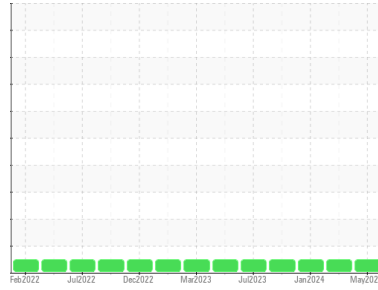

NORMAL



Machine Id

1954

Component

Diesel Engine

Fluid

DIESEL ENGINE OIL SAE 5W30 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0887553	HRE0000116	WC0810308
Sample Date	Client Info		30 May 2024	14 Apr 2024	02 Jan 2024
Machine Age	mls	Client Info	119086	114872	110728
Oil Age	mls	Client Info	0	6000	0
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	12	8	8
Chromium	ppm	ASTM D5185m >20	0	<1	<1
Nickel	ppm	ASTM D5185m >4	0	<1	0
Titanium	ppm	ASTM D5185m	0	<1	0
Silver	ppm	ASTM D5185m >3	0	0	0
Aluminum	ppm	ASTM D5185m >20	3	3	2
Lead	ppm	ASTM D5185m >40	0	<1	0
Copper	ppm	ASTM D5185m >330	0	<1	<1
Tin	ppm	ASTM D5185m >15	<1	<1	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	<1	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	28	31	30
Barium	ppm	ASTM D5185m 10	<1	0	4
Molybdenum	ppm	ASTM D5185m 100	138	217	207
Manganese	ppm	ASTM D5185m	30	4	3
Magnesium	ppm	ASTM D5185m 450	525	621	611
Calcium	ppm	ASTM D5185m 3000	1214	1284	1174
Phosphorus	ppm	ASTM D5185m 1150	605	626	585
Zinc	ppm	ASTM D5185m 1350	725	725	690
Sulfur	ppm	ASTM D5185m 4250	2951	2771	2799

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	14	20	17
Sodium	ppm	ASTM D5185m	3	0	0
Potassium	ppm	ASTM D5185m >20	<1	2	2
Fuel	%	ASTM D3524 >5	<1.0	<1.0	<1.0

INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.1	0	0
Nitration	Abs/cm	*ASTM D7624 >20	10.1	10.8	10.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	20.9	21.5	21.6

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	14.0	15.3	14.8
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	4.3	4.7	4.1







OIL ANALYSIS REPORT

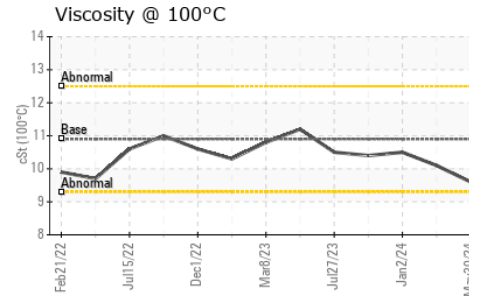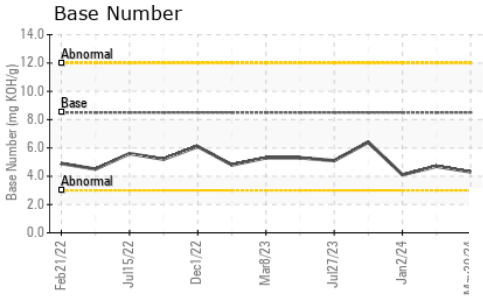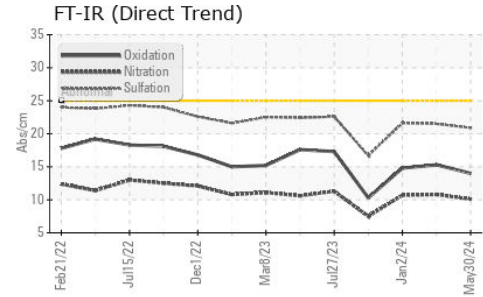

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	10.9	9.6	10.1

GRAPHS

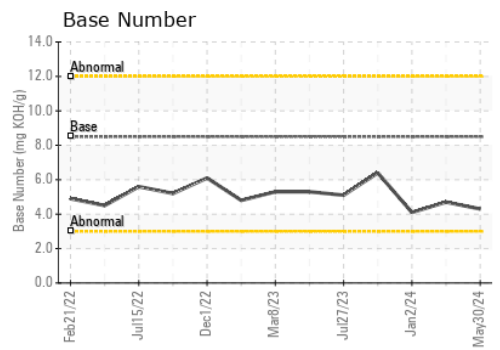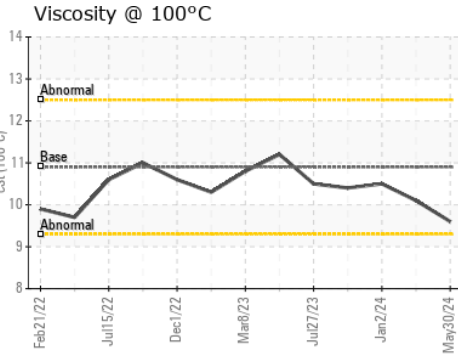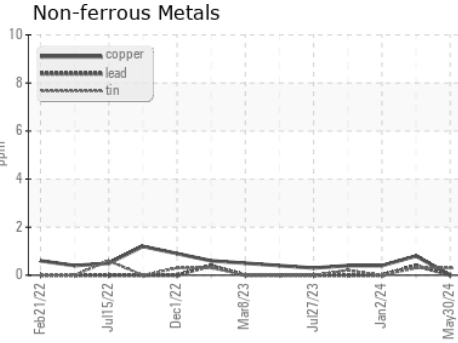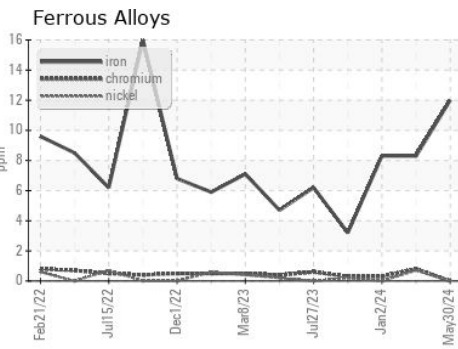

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0887553 **Received** : 31 May 2024
Lab Number : 06196209 **Tested** : 05 Jun 2024
Unique Number : 11058332 **Diagnosed** : 05 Jun 2024 - Don Baldrige
Test Package : FLEET (Additional Tests : FuelDilution)

TOWN OF CHAPEL HILL
 6900 MILLHOUSE RD
 CHAPEL HILL, NC
 US 27516
 Contact: Lisa DePasqua
 ldepasqua@townofchapelhill.org
 T: (919)696-4941
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)