




# OIL ANALYSIS REPORT



Machine Id  
**CATERPILLAR 306 8307 (S/N C6G605766)**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON XL SYN BLEND 15W40 (--- GAL)**

### Sample Rating Trend

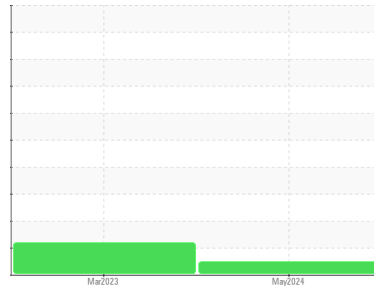

**NORMAL**



### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

Metal levels are typical for a new component breaking in.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0913353</b>	WC0791060	---
Sample Date	Client Info		<b>29 May 2024</b>	10 Mar 2023	---
Machine Age	hrs	Client Info	<b>963</b>	450	---
Oil Age	hrs	Client Info	<b>513</b>	450	---
Oil Changed	Client Info		<b>Changed</b>	Changed	---
Sample Status			<b>NORMAL</b>	ATTENTION	---

### CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	▲ 3.4	---
Water	WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol	WC Method		<b>NEG</b>	NEG	---

### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>18</b>	29	---
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	2	---
Nickel	ppm	ASTM D5185m >2	<b>0</b>	<1	---
Titanium	ppm	ASTM D5185m >2	<b>0</b>	0	---
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m >25	<b>4</b>	4	---
Lead	ppm	ASTM D5185m >40	<b>0</b>	0	---
Copper	ppm	ASTM D5185m >330	<b>13</b>	13	---
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	---

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 1	<b>11</b>	29	---
Barium	ppm	ASTM D5185m 1	<b>&lt;1</b>	2	---
Molybdenum	ppm	ASTM D5185m 60	<b>62</b>	39	---
Manganese	ppm	ASTM D5185m 1	<b>&lt;1</b>	2	---
Magnesium	ppm	ASTM D5185m 1010	<b>942</b>	463	---
Calcium	ppm	ASTM D5185m 1070	<b>1155</b>	1925	---
Phosphorus	ppm	ASTM D5185m 1150	<b>1070</b>	866	---
Zinc	ppm	ASTM D5185m 1270	<b>1275</b>	1074	---
Sulfur	ppm	ASTM D5185m 2060	<b>3453</b>	3652	---

### CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>7</b>	12	---
Sodium	ppm	ASTM D5185m	<b>4</b>	4	---
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	1	---

### INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.2</b>	0.3	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.8</b>	8.9	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>19.6</b>	22.7	---

### FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>16.9</b>	21.1	---
Base Number (BN)	mg KOH/g	ASTM D2896 9.6	<b>7.4</b>	9.4	---







# OIL ANALYSIS REPORT

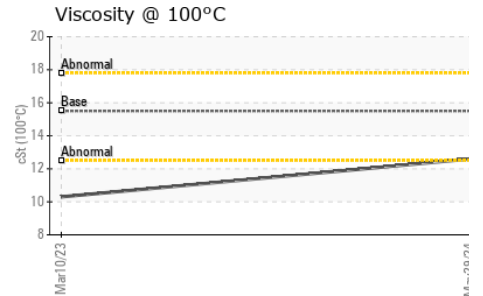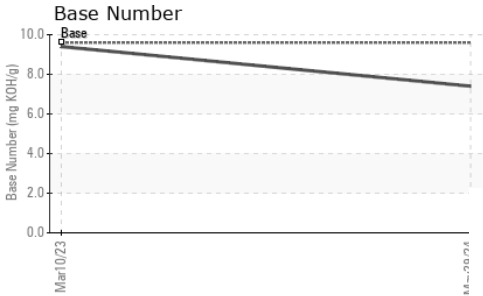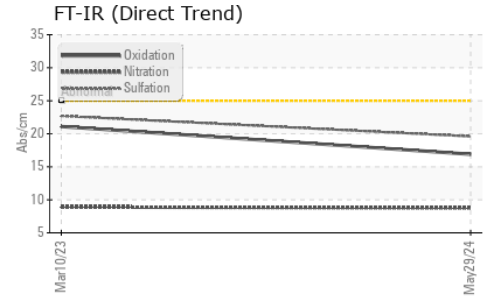

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.5	12.6	10.3

### GRAPHS

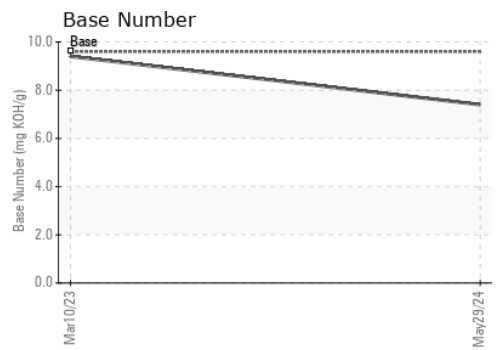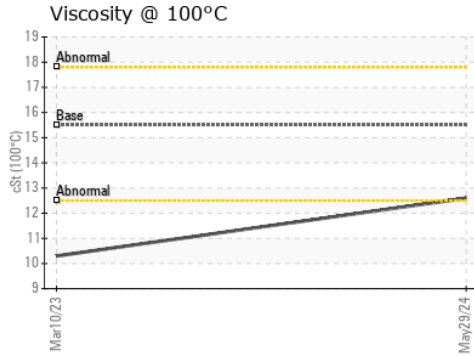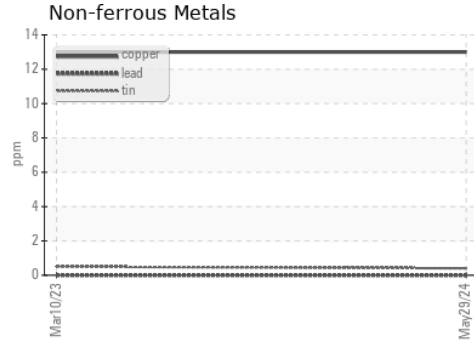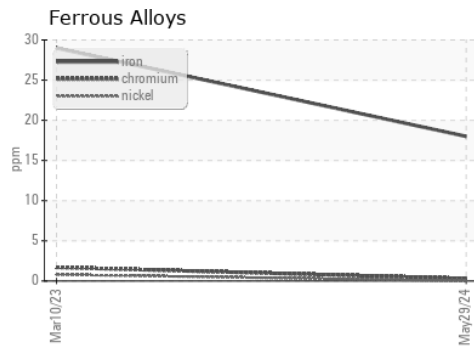

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0913353      **Received** : 31 May 2024  
**Lab Number** : 06196217      **Tested** : 03 Jun 2024  
**Unique Number** : 11058340      **Diagnosed** : 03 Jun 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: TBN )

**TRADER CONSTRUCTION CO.**  
 PO DRAWER 1578  
 NEW BERN, NC  
 US 28563  
 Contact: MIKE WYATT  
 mw Wyatt@traderconstruction.com  
 T: (252)633-1399  
 F: (252)638-4871

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)