




OIL ANALYSIS REPORT

Sample Rating Trend

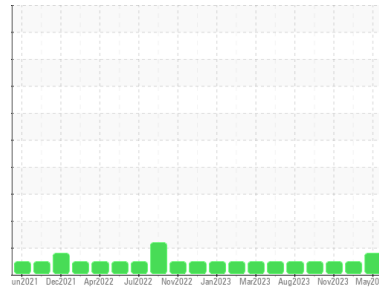

WEAR



Machine Id
CHARLIE T

Component
Port Main Engine

Fluid
CHEVRON DELO 400 MULTIGRADE 15W40 (30 GAL)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

An increase in the iron level is noted. All other component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		MW0071509	MW0059562	MW0059550
Sample Date	Client Info		28 May 2024	14 Mar 2024	19 Nov 2023
Machine Age	hrs	Client Info	24533	0	0
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			ATTENTION	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>4.0	<1.0	<1.0	<1.0
Water	WC Method	>0.1	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >75	54	14	17
Chromium	ppm	ASTM D5185m >8	2	<1	0
Nickel	ppm	ASTM D5185m >2	<1	<1	0
Titanium	ppm	ASTM D5185m >3	23	11	10
Silver	ppm	ASTM D5185m >2	0	<1	0
Aluminum	ppm	ASTM D5185m >15	3	3	3
Lead	ppm	ASTM D5185m >18	5	1	2
Copper	ppm	ASTM D5185m >80	5	2	1
Tin	ppm	ASTM D5185m >14	1	<1	0
Vanadium	ppm	ASTM D5185m	<1	<1	0
Cadmium	ppm	ASTM D5185m	0	<1	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	98	98	102
Barium	ppm	ASTM D5185m	<1	0	0
Molybdenum	ppm	ASTM D5185m	68	45	54
Manganese	ppm	ASTM D5185m	4	<1	0
Magnesium	ppm	ASTM D5185m	1139	620	730
Calcium	ppm	ASTM D5185m	2855	1570	1871
Phosphorus	ppm	ASTM D5185m 1360	1208	668	785
Zinc	ppm	ASTM D5185m 1480	1326	756	935
Sulfur	ppm	ASTM D5185m	5606	2923	3289

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	8	4	4
Sodium	ppm	ASTM D5185m >75	5	4	2
Potassium	ppm	ASTM D5185m >20	5	4	4

INFRA-RED





	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	2.8	1.9	2.6
Nitration	Abs/cm	*ASTM D7624 >20	11.3	9.3	9.8
Sulfation	Abs/.1mm	*ASTM D7415 >30	25.0	21.6	23.0

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	16.2	14.0	14.6
Base Number (BN)	mg KOH/g	ASTM D2896 12.2	5.8	7.7	6.9







OIL ANALYSIS REPORT

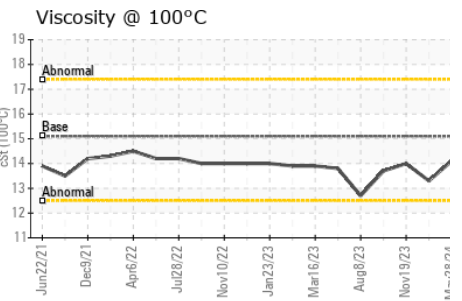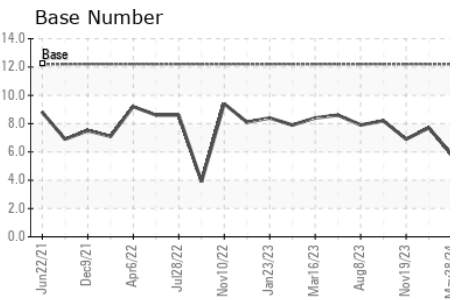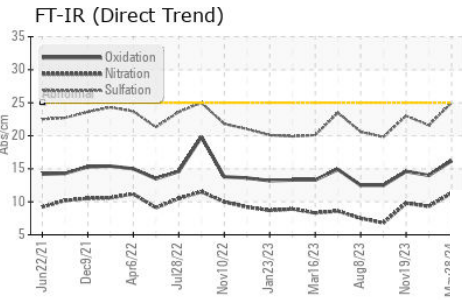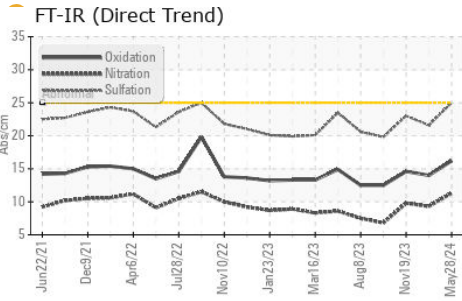

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.1	14.1	13.3	14.0

GRAPHS

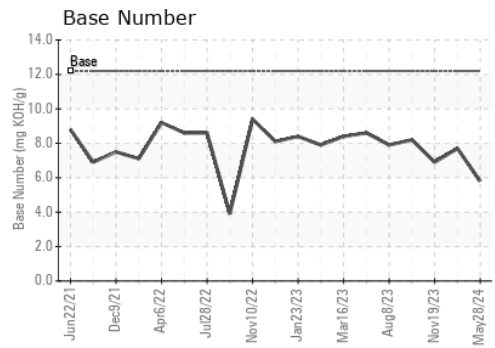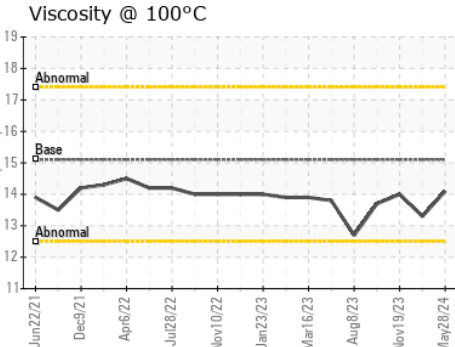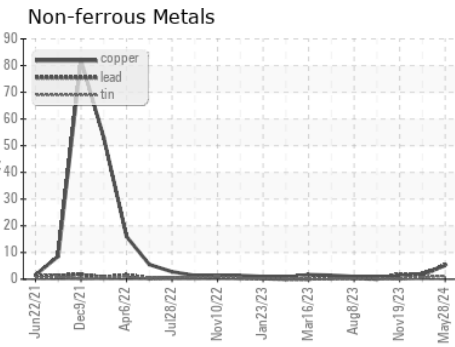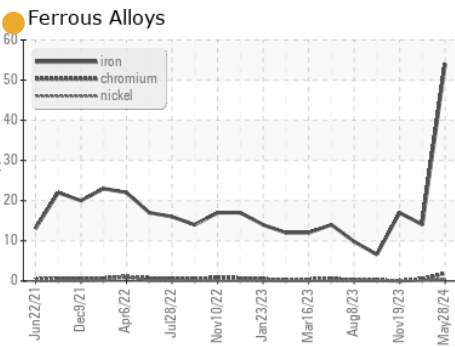

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : MW0071509 **Received** : 31 May 2024
Lab Number : **06196317** **Tested** : 03 Jun 2024
Unique Number : 11058440 **Diagnosed** : 03 Jun 2024 - Don Baldrige
Test Package : MAR 2

OSAGE MARINE
 750 E DAVIS ST
 ST LOUIS, MO
 US 63111

Contact: MIKE KESSLER
mike.kessler@osagemarine.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: