




# OIL ANALYSIS REPORT



Area  
**[W52104]**  
 Machine Id  
**JOHN DEERE 824K 1DW824KXCGF674522**  
 Component  
**Diesel Engine**  
 Fluid  
**JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (--- GAL)**

### Sample Rating Trend

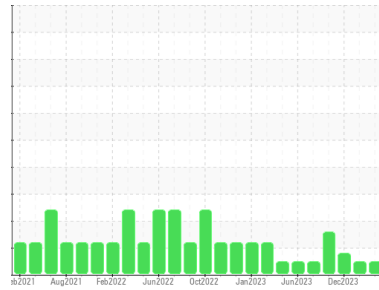

**NORMAL**



### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>JR0212212</b>	JR0200469	JR0180496
Sample Date	Client Info		<b>28 May 2024</b>	28 Feb 2024	01 Dec 2023
Machine Age	hrs	Client Info	<b>15488</b>	15022	14622
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	ABNORMAL

### CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.21	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

### WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>51	<b>10</b>	17	18
Chromium	ppm	ASTM D5185m	>11	<b>&lt;1</b>	1	2
Nickel	ppm	ASTM D5185m	>5	<b>&lt;1</b>	3	▲ 6
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>31	<b>11</b>	10	14
Lead	ppm	ASTM D5185m	>26	<b>0</b>	2	0
Copper	ppm	ASTM D5185m	>26	<b>1</b>	2	<1
Tin	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

### ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		<b>140</b>	245	274
Barium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>158</b>	250	263
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Magnesium	ppm	ASTM D5185m		<b>546</b>	829	824
Calcium	ppm	ASTM D5185m		<b>1611</b>	1386	1377
Phosphorus	ppm	ASTM D5185m		<b>970</b>	938	924
Zinc	ppm	ASTM D5185m		<b>1122</b>	1116	1103
Sulfur	ppm	ASTM D5185m		<b>3769</b>	3472	3384

### CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>22	<b>7</b>	8	8
Sodium	ppm	ASTM D5185m	>31	<b>3</b>	4	4
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	5	6
Fuel	%	ASTM D3524	>2.1	<b>&lt;1.0</b>	<1.0	<1.0





### INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>3	<b>0.2</b>	0.2	0.2
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.3</b>	8.2	8.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.6</b>	20.8	21.1

### FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>14.3</b>	15.2	15.4
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	<b>7.5</b>	8.8	8.8





# OIL ANALYSIS REPORT

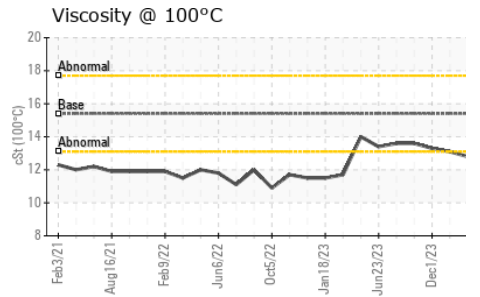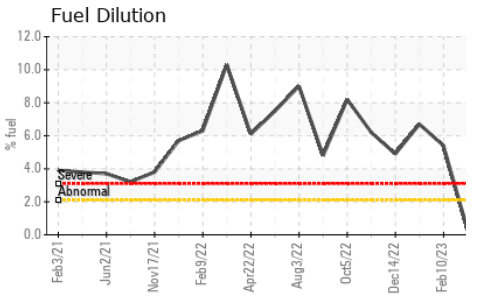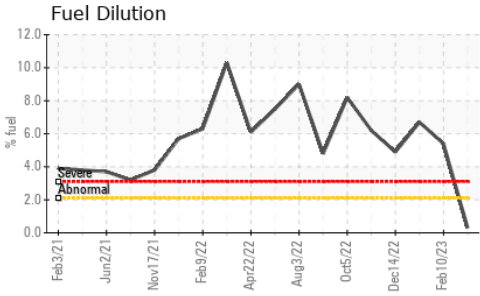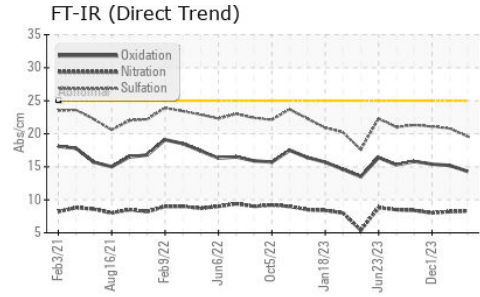

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.21	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>12.8</b>	13.1	13.3

### GRAPHS

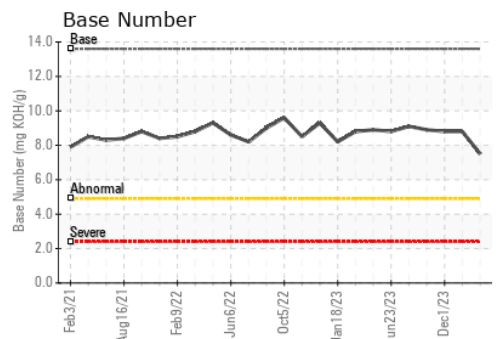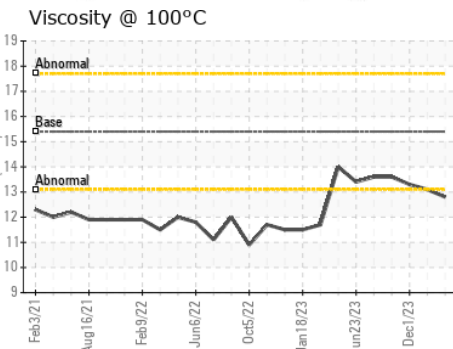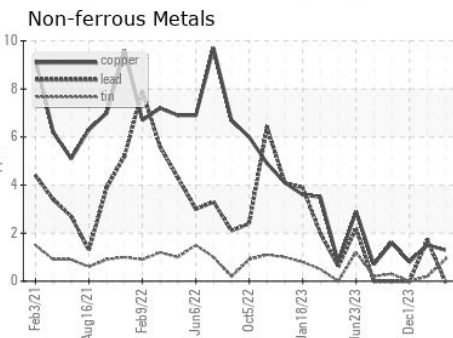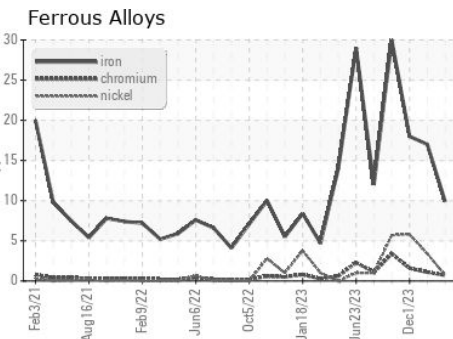

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0212212      **Received** : 31 May 2024  
**Lab Number** : **06196390**      **Tested** : 03 Jun 2024  
**Unique Number** : 11058513      **Diagnosed** : 03 Jun 2024 - Don Baldrige  
**Test Package** : CONST ( Additional Tests: FuelDilution, TBN )

**JRE - ASHLAND**  
 11047 LEADBETTER RD  
 ASHLAND, VA  
 US 23005  
 Contact: DAVID ZIEG  
 dzieg@jamesriverequipment.com  
 T: (804)798-6001  
 F: (804)798-0292

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)