

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

Machine Id

JOHN DEERE 8250R 8250R UNIT 2 (S/N 187152)

Hydraulic System

Fluid

TDH FLUID SAE 75W80 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		May2023	Aug2023 Nov2023	Feb2024 Apr2024	May2024	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PE0002537	PE0003840	PE0003818
Sample Date		Client Info		28 May 2024	14 May 2024	05 Apr 2024
Machine Age	hrs	Client Info		5341	5341	5103
Oil Age	hrs	Client Info		5341	5103	4861
Oil Changed	1110	Client Info		N/A	N/A	N/A
Sample Status		Oliotic IIIIo		NORMAL	ABNORMAL	NORMAL
CONTAMINATIO	N	method	limit/base	current	history1	history2
Water		WC Method		NEG	NEG	NEG
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184	mint bass	18	20	14
Iron	nnm		- 20	14	13	14
Chromium	ppm	ASTM D5185m ASTM D5185m	>20	0	<1	0
Nickel	ppm	ASTM D5185m		0	0	0
Titanium	ppm	ASTM D5185m	>10	0	<1	0
Silver	ppm	ASTM D5185m		0	<1	0
Aluminum	ppm		>10	_	<1	0
	ppm	ASTM D5185m		<1 1		0
Lead	ppm		>10		2	
Copper	ppm	ASTM D5185m	>75	7	6	6
Tin	ppm	ASTM D5185m	>10	0	1	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	<1	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	10	3	2	3
Barium	ppm	ASTM D5185m	10	0	0	0
Molybdenum	ppm	ASTM D5185m	10	<1	1	0
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	100	48	43	51
Calcium	ppm	ASTM D5185m	3500	2767	2616	2813
Phosphorus	ppm	ASTM D5185m	1150	982	883	945
Zinc	ppm	ASTM D5185m	1150	1131	958	1112
Sulfur	ppm	ASTM D5185m	5000	3708	3418	3628
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	3	3	3
Sodium	ppm	ASTM D5185m		<1	<1	0
Potassium	ppm	ASTM D5185m	>20	0	0	0
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	1443		578
Particles >6µm		ASTM D7647	>1300	418		147
Particles >14µm		ASTM D7647	>160	58		19
Particles >21µm		ASTM D7647	>40	19		5
Particles >38µm		ASTM D7647	>10	0		0
Particles >71µm		ASTM D7647	>3	0		0

ISO 4406 (c) >19/17/14


18/16/13

Oil Cleanliness

16/14/11



OIL ANALYSIS REPORT

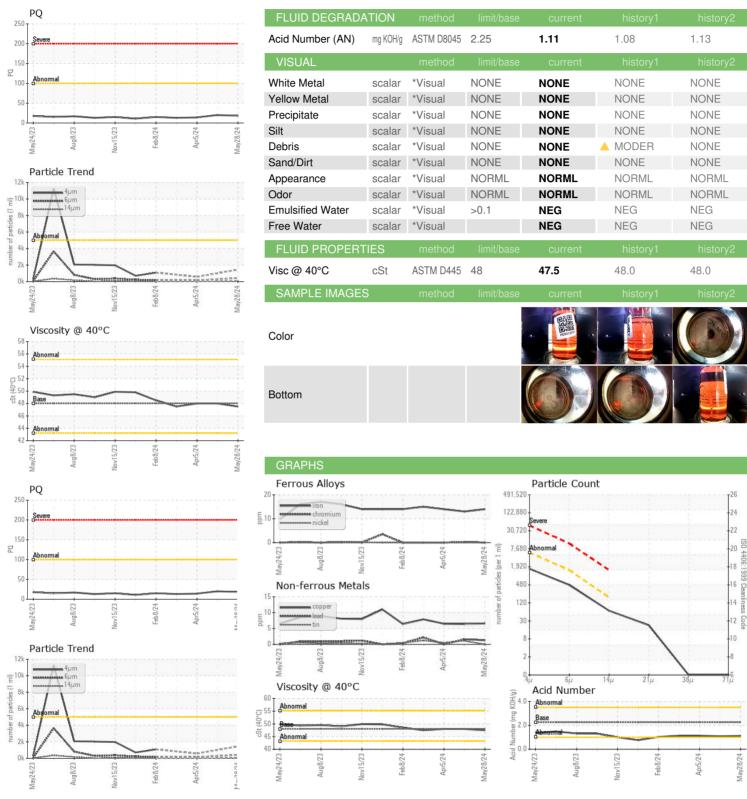





Certificate 12367

Laboratory Sample No.

Lab Number : 06196552 Unique Number : 11058675

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : PE0002537 Received : 31 May 2024

Tested : 03 Jun 2024 Diagnosed : 03 Jun 2024 - Don Baldridge

Test Package : CONST (Additional Tests: ICP, KV40, PQ, PrtCount, SCREEN) To discuss this sample report, contact Customer Service at 1-800-237-1369.

 st - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: MORDAL [WUSCAR] 06196552 (Generated: 06/04/2024 07:31:27) Rev: 1

Submitted By: ROCHELLE MENDOZA

MORNING STAR DAIRY

Contact: JOHN DEVRIES

johnidevries@gmail.com

801 FM 694

US 79022

T:

F:

DALHART, TX